



REFRIGERATION A/C SYSTEM ACCESSORIES

广东先进制冷空调系统配件

PRODUCT BROCHURE REFRIGERATION
A/C SYSTEM ACCESSORIES



GUANGDONG ARTECO REFRIGERATION CO., LTD.

□ +86 0757 8862 9197

✉ Marketing@artecomy.com

🌐 <https://www.artecomy.com>

⑨ No. 56, Sanhe Road, Hecheng Street, Gaoming District, Foshan, Guangdong, China

让地球上的人和环境更舒服

MAKE PEOPLE AND THE ENVIRONMENT ON EARTH MORE COMFORTABLE

CONTENTS

目录

11-44	117-120
电子膨胀阀 ELECTRONIC EXPANSION VALVE	视液镜 SIGHT GLASS
45-54	121-128
电动调节阀 MOTORIZED REGULATING VALVE	单向阀/截止阀 CHECK VALVE/ SHUT OFF VALVE
55-80	129-134
电磁阀 SOLENOID VALVE	避震波纹金属软管 VIBRATION RESISTANT CORRUGATED METAL HOSE
81-96	135-143
热力膨胀阀 THERMOSTATIC EXPANSION VALVE	过滤器 DRY FILTER
97-108	145-150
球阀 BALL VALVE	YL型油流量开关 YL TYPE OIL FLOW SWITCH
109-116	151-162
安全阀 SAFETY VALVE	压力传输配件 FITTING



MAKE PEOPLE AND THE ENVIRONMENT
ON EARTH MORE COMFORTABLE

让地球上的人和环境更舒服

关于我们

ABOUT ARTECO

广东先进制冷设备有限公司，作为全球领先的智能化创新型制冷设备制造企业，不仅集冷链一体化解决方案服务商、集成商、供应商于一身，更以其卓越的创新能力在业界脱颖而出。公司总部坐落在粤港澳大湾区制造业的核心地带——广东佛山，占地近150,000平方米的现代化园区内，汇聚了众多行业知名的制冷专家和一系列高精尖的设备系统，包括数控、模具、膨胀、压板、喷涂、测试等。

我们公司的主营业务涵盖了风冷冷凝器、水冷冷凝器、空冷器、蒸发器、储液器、压缩机、液压机、压缩冷凝机组、环境试验箱、商超冷柜、食物冰冻冷库、步入式冷库以及制冷相关的各类保温复合板、冷库铝板、聚氨酯板等多元化产品。这些设备广泛应用于冷库、冷柜、陈列柜、空调、冰浴、食品、医疗等多个领域，满足了不同行业的多样化需求。

广东先进制冷设备有限公司以先进的制冷技术、智能化的制冷设备和专业化的客户服务为核心竞争力。我们致力于满足食品加工、冷藏、物流、零售、乳制品、海鲜出口、仓储、酒店、制药、工业冷却和冷链运营等行业对制冷设备的各种需求。通过持续的技术创新和产品升级，我们为客户提供高效、可靠、环保的制冷解决方案。

值得一提的是，广东先进制冷设备有限公司拥有193项专利，这些专利不仅体现了我们在制冷技术领域的领先地位，更是我们为客户提供卓越服务的坚实保障。我们注重技术研发和创新，不断推出具有自主知识产权的新产品、新技术，以满足市场的不断变化和客户的日益增长的需求。

我们深知绿色、环保、可持续发展的重要性，因此，我们致力于推动制冷行业的绿色化发展。通过采用环保材料、优化产品设计、提高能效比等方式，我们努力降低制冷设备对环境的影响，为可持续发展贡献自己的力量。

广东先进制冷设备有限公司立足于佛山市，服务网络遍布全国。我们在中国的主要城市（广州、深圳、上海、西安、郑州）设有服务点，并在国际城市（东京、吉隆坡、利雅得）设有区域服务中心。这些服务点使我们能够与客户保持紧密的联系，及时为客户提供从方案设计到专业定制的售后服务和支持。

展望未来，广东先进制冷设备有限公司将继续秉承“创新、质量、服务”的理念，不断提升自身的核心竞争力，为客户提供更加优质、高效、环保的制冷设备和解决方案。我们将与全球客户携手共进，共创美好未来！

ARTECO is a leading manufacturer of refrigeration equipment and energy-saving systems. We specialize in designing tailored solutions to meet the diverse needs of customers across industries such as food processing, cold storage and logistics, retail, dairy, seafood exports, warehousing, hospitality, pharmaceuticals, industrial cooling, and cold chain operations.

Committed to sustainability, ARTECO focuses on reliable quality, responsible practices, and customer satisfaction. An experienced in-house team leverages cutting-edge technologies developed through global collaboration.

With regional service centers in major Chinese cities (Guangzhou, Shenzhen, Shanghai, Xi'an, Zhengzhou) and international bases (Tokyo, Kuala Lumpur, Riyadh), ARTECO is able to closely connect with local customers, providing tailored services ranging from system design to commissioning and comprehensive aftermarket support worldwide.



智能生产线
ADVANCED PRODUCTION LINE

国内领先技术
自动化生产

半自动红外线节能烘箱
SEMI-AUTOMATIC INFRARED ENERGY-SAVING OVEN

高效节能
操作便捷



精加工车间
FINISHING CENTER

高精尖加工中心
CNC数控



氦气检漏设备
HELIUM TESTING MACHINE

自动检漏报警
检测效率极高



每款产品的背后
都是高精技术的匠心打造


FOCUSSED ON REFRIGERATION FOR MANY YEARS

公司占地150000平方米, 拥有30000平方米的智能制造车间, 包含各类国内先进的CNC加工设备及高端检测设备500余台(套), 可以快速制造制冷设备各类配件。

The company covers an area of 150000 square meters and has a 30000 square meter intelligent manufacturing workshop, including various advanced domestic technologiesMore than 500 sets of CNC processing equipment and high-end testing equipment can quickly manufacture various accessories for refrigeration equipment.

发展历程

DEVELOPMENT HISTORY

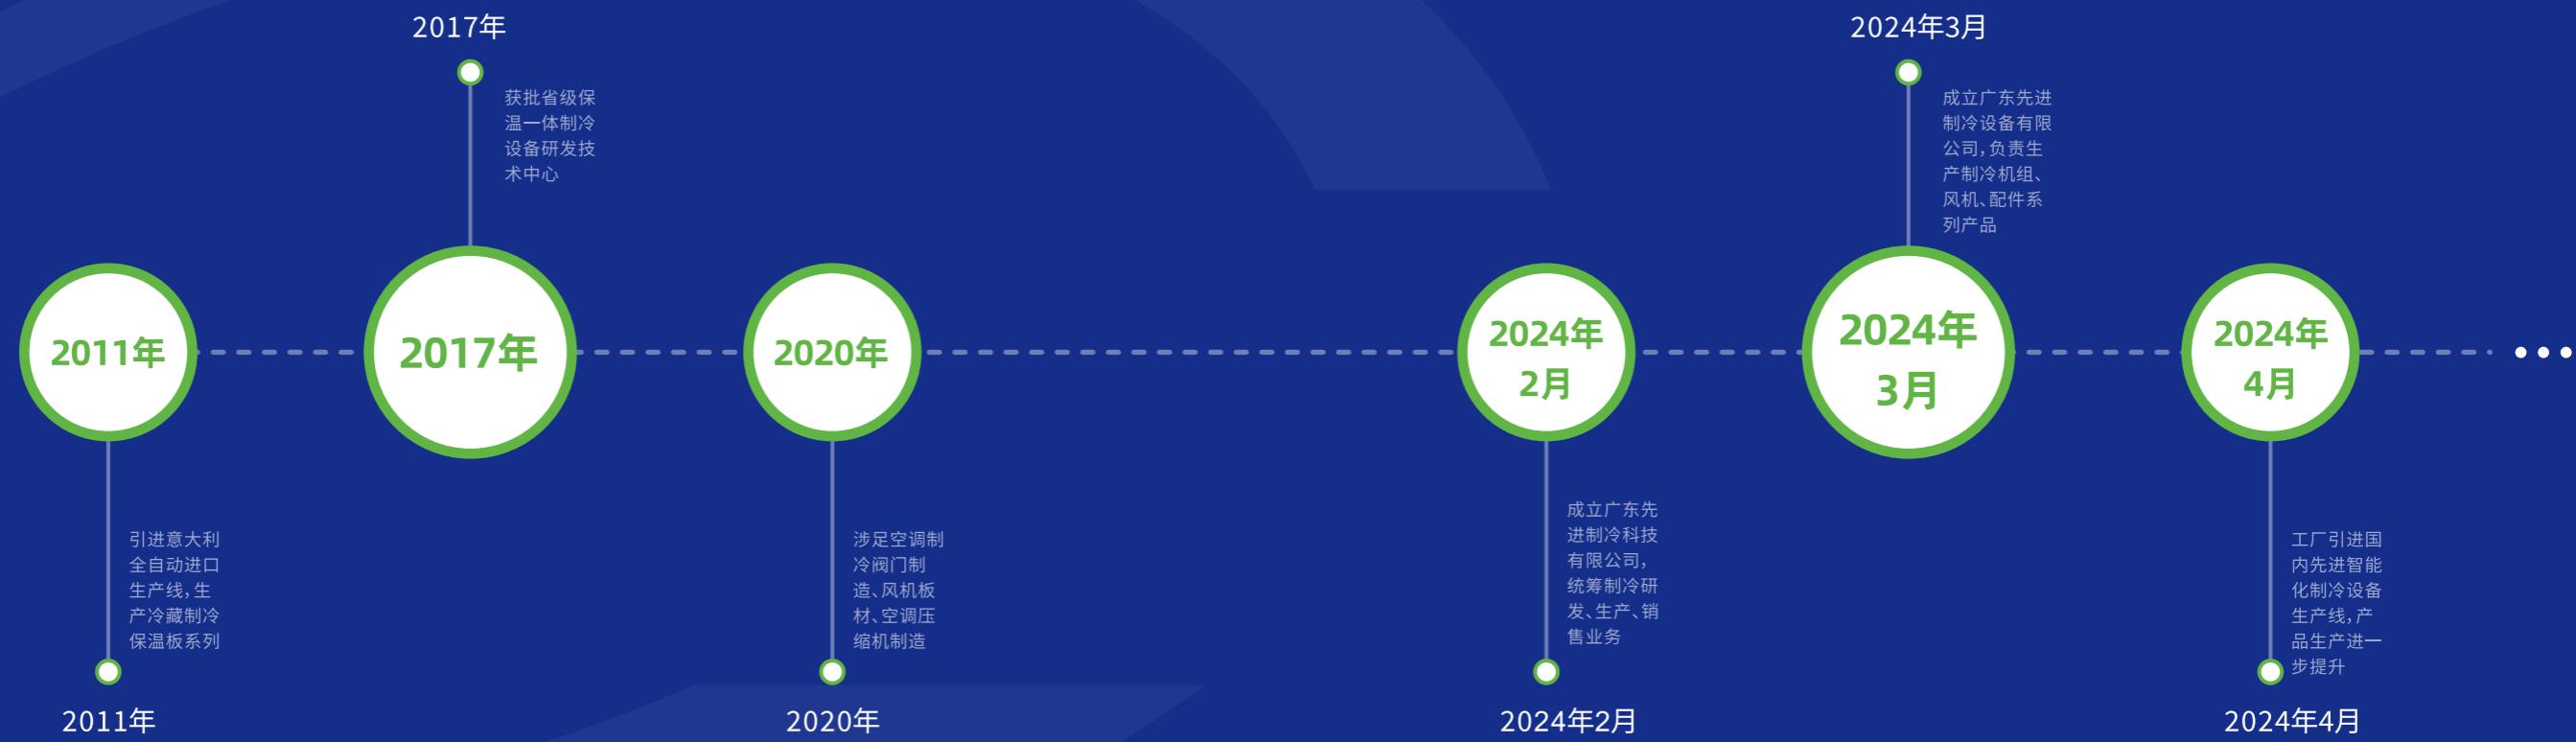

全球品牌渠道

GLOBAL BRAND CHANNELS

REFRIGERATION A/C SYSTEM ACCESSORIES



公司拥有自营进出口权，产品主要销往广州、上海、北京，并出口欧洲、美国、澳洲等地，与国内知名空调制冷企业建立了长期业务合作关系，产品质量深受用户青睐。

ARTECO product is well sold in domestic market , like Guang-zhou, Shanghai, Beijing, etc... exported mainly to Europe, USA, Australia. With its good quality, ARTECO has built long-term cooperation with famous companies in refrigeration or A/C.

ELECTRONIC EXPANSION VALVE Series

电子膨胀阀系列

REFRIGERATION A/C SYSTEM ACCESSORIES



DPF/DPFS/SPF系列电子膨胀阀适用于空调、商用冷柜、小型冷库、大型冷库和热泵等制冷系统中，精确控制系统中制冷剂流量，使系统始终在最佳状态下运行，达到快速制冷，实现精准控制和节能的目的。

DPF/DPFS electronic expansion valve is suitable for refrigeration systems such as air conditioners, commercial refrigerators, small refrigeration storage and heat pumps. It can accurately control the refrigerant flow in the system, so that the system can always run in the best state, achieve rapid cooling, and achieve the goal of precise control and energy saving.

ARTECO

DPF 系列电子膨胀阀

DPF Series electronic expansion valve



产品概述 Product Description

DPF型电子膨胀阀适用于空调、商用冷柜、小型冷库和热泵等制冷系统中，精确控制系统中制冷剂流量，使系统始终在最佳状态下运行，达到快速制冷，实现精准控制和节能的目的。

DPF electronic expansion valve is suitable for refrigeration systems such as air conditioners, commercial refrigerators, small refrigeration storage and heat pumps. It can accurately control the refrigerant flow in the system, so that the system can always run in the best state, achieve rapid cooling, and achieve the goal of precise control and energy saving.

特点 Features


- 体积小、重量轻，性能稳定可靠；
- 反应和动作速度快；
- 膨胀阀结构可靠，噪音低，故障率低；
- DPF-RL3/DPF-P03系列产品采用平衡口设计，逆向开阀压力高；
- 适用于少油或无油系统

- Small size, light weight, stable and reliable performance;
- Fast response and action;
- New structure design of expansion valve, low noise and low failure rate;
- DPF-RL3/DPF-P03 series products apply design of balanced port, and the reverse valve opening pressure is high;
- Suitable for systems with little oil or no oil.

技术参数 Technical Parameters

适用制冷剂 Applicable refrigerant	R22, R134a, R404A, R407C, R410A
名义容量 Nominal capacity	2.5~126KW
介质温度 Medium temperature	-30~+70°C
环境温度 Environment temperature	-30~+60°C
环境湿度 Environment humidity	95%RH以下
全开脉冲 Full open pulse	500/1000PS
开阀脉冲 Valve opening pulse	32±20
额定电压 Rated voltage	12V DC ($\pm 10\%$) , 矩形波 rectangular wave
励磁方式 Excitation mode	1-2相励磁, 单极驱动 1-2 phase excitation, single pole drive
励磁速度 Excitation speed	30~90pps
结束励磁模式保持 Finishing excitation mode keeps	0.1~1.0s
全程耗时 Time cost for whole course	6s (83pps)
驱动电流 Drive current	260mA
线圈电阻 Coil resistance	46±3.7Ω/相
线圈绝缘等级 Coil insulation grade	E级
防护等级 Protect grade	IP65

结构 Structure

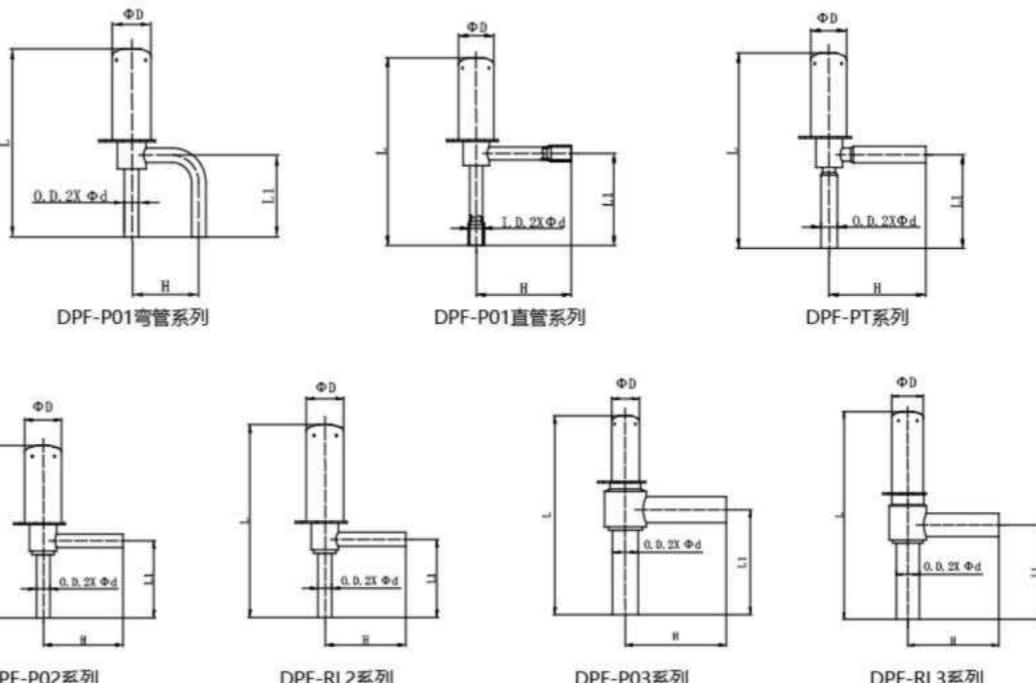


外型尺寸 Overall dimension

型号 Model	ΦD	L	L1	H	Φd
DPF-P01010-P01024弯管	17.36	83	36	30	6.35
DPF-P01010-P01024直管	17.36	92	45	47	6.5
DPF-PT028-PT032	17.36	94	45	47	7.94
DPF-P02028-P02032	21.76	100.5	45	47	7.94
DPF-RL2028-RL2032	21.76	106	42	42	7.94
DPF-P03040-P03065	17.36	122	64	63	16
DPF-RL3040-RL3065	21.76	142	64	63	16

注：接管尺寸可以根据要求定制。

Note: dimension of connecting pipe can be customized according to requirements

线圈 Coil

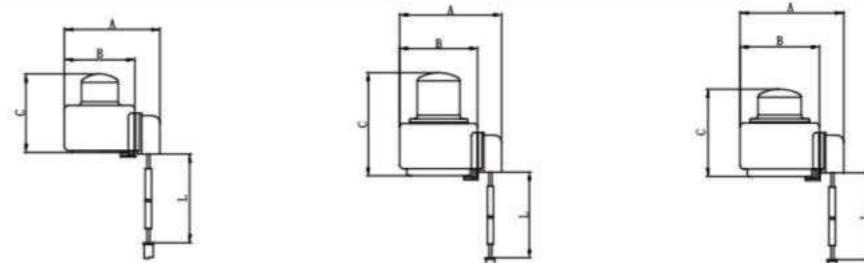





外型尺寸 Overall dimension

型号 Model	A	B	C	L	接线型号 Connector model
DQ-M01012系列	51	38	42	/	XHP-5
DQ-M02012系列	57.5	44	57	/	XHP-6
DQ-M04012系列	57.5	44	46.5	/	XAP-5 XAP-6

注：导线长度和连接器可根据客户要求定制。

Note: the lead wire length and connector can be customized according to customer's requirements.





驱动时序 Driving schedule

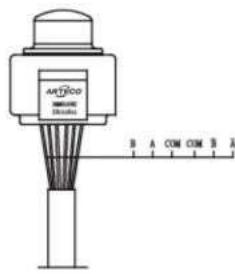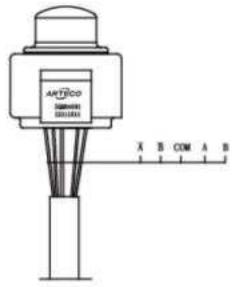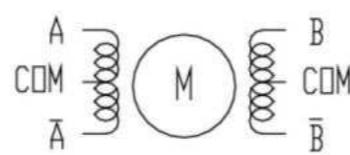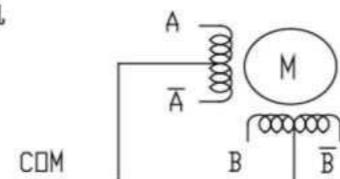四相八拍电机
接线示意图四相八拍电机
接线示意图

励磁方式								
相号	1	2	3	4	5	6	7	8
A								
B								
Ā								
B̄								

动作顺序:
1→2→3→4→5→6→7→8 关闭
8→7→6→5→4→3→2→1 打开

流量曲线示意图 Schematic pic. of flow curve

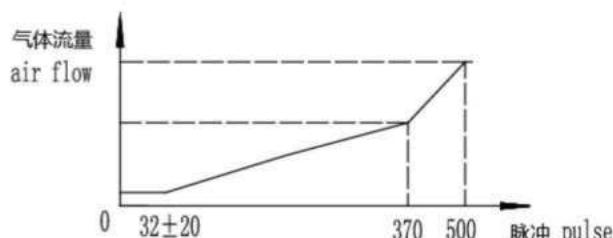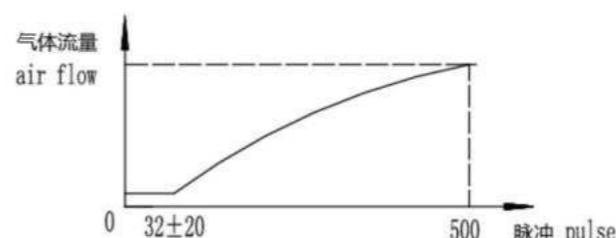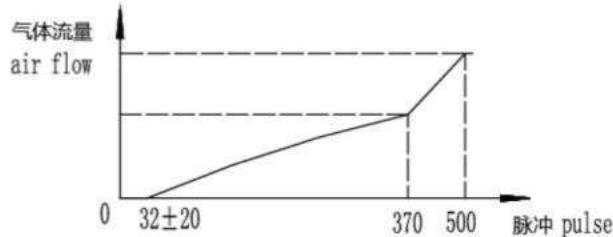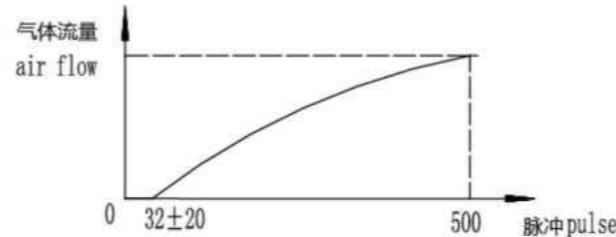

DPF-P01010~P01024 DPF-PT028~PT032

选型表 Model selection


产品系列 Product series	全开步数 Full open steps	通径 Diameter [mm]	KV ²⁾ [m ³ /h]	名义容量 [KW] ¹⁾ Nominal capacity				最大工作压力 Max working pressure [MPa]	最大工作压差 Max working pressure difference Reverse valve opening pressure difference [MPa]		
				R22	R134a	R407C ³⁾	R404A/R507				
DPF-P01013	500	1.30	0.06	4.36	3.40	4.46	3.08	5.12	4.2	3.2	≥1.47
DPF-P01016	500	1.65	0.08	8.01	6.26	8.22	5.65	9.42	4.2	3.2	≥1.47
DPF-P01018	500	1.80	0.10	9.11	7.10	9.32	6.44	10.70	4.2	3.2	≥1.47
DPF-P01020	500	2.00	0.16	11.25	8.77	11.51	7.95	13.21	4.2	2.8	≥1.47
DPF-P01022	500	2.20	0.20	13.61	10.61	13.92	9.61	15.98	4.2	2.8	≥1.47
DPF-P01024	500	2.40	0.23	16.20	12.63	16.57	11.44	19.02	4.2	2.8	≥1.47
DPF-PT030	500	3.00	0.39	20.20	15.78	20.76	14.24	23.77	4.2	2.8	≥1.47
DPF-PT032	500	3.20	0.43	27.85	21.76	28.62	19.63	32.78	4.2	2.8	≥1.47
DPF-P03040	500	6.50	0.50	40.37	31.54	41.49	28.45	47.52	4.2	4.2	≥3.5
DPF-P03045	500	6.50	0.70	50.48	39.44	51.88	35.58	59.42	4.2	4.2	≥3.5
DPF-P03055	500	6.50	0.80	67.30	52.58	69.16	47.44	79.21	4.2	4.2	≥3.5
DPF-P03065	500	6.50	1.10	100.96	78.88	103.75	71.16	118.83	4.2	4.2	≥3.5

名义工况:

- 额定能力基于: R407C冷凝温度: +38°C; 蒸发温度: +5°C;
过冷度: 0 K; 过热度: 0 K;
- Kv值: 基于密度为1T/m³的水、阀门两端压差等于100KPa时的正向流动能力。
- Rated capacity is based on: R407C condensing temperature: +38°C; evaporating temperature: +5°C; super cooling degree: 0 K; super heat degree: 0 K;
- Kv value: the pressure difference based on the two sides between water with density 1T/m³ and the valve is equal to the positive flow capacity at 100Kpa.

Nominal condition:

- 额定能力基于: R407C冷凝温度: +38°C; 蒸发温度: +5°C;
过冷度: 0 K; 过热度: 0 K;
- Kv值: 基于密度为1T/m³的水、阀门两端压差等于100KPa时的正向流动能力。
- Rated capacity is based on: R407C condensing temperature: +38°C; evaporating temperature: +5°C; super cooling degree: 0 K; super heat degree: 0 K;
- Kv value: the pressure difference based on the two sides between water with density 1T/m³ and the valve is equal to the positive flow capacity at 100Kpa.

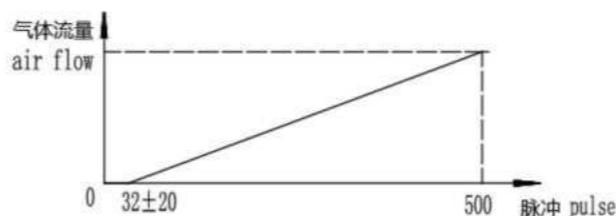

DPF-P03040~P03065

注: 流量曲线要求可以根据要求定制。
Note: the flow curve can be customized according to requirement.

额定能力 (kW) Rated capacity																			
	冷凝温度[°C] Condensing temperature	DPF-P01013							DPF-P01016										
		蒸发温度[°C] Evaporating temperature							蒸发温度[°C] Evaporating temperature										
		10	5	0	-5	-10	-20	-30	10	5	0	-5	-10	-20	-30	10	5	0	-5
R410A	30	4.38	4.73	5.02	5.24	5.41	5.63	5.71	8.06	8.72	9.25	9.65	9.96	10.36	10.51	30	9.15	9.88	10.49
	35	4.72	5.00	5.22	5.41	5.54	5.70	5.73	8.68	9.21	9.63	9.95	10.20	10.49	10.56	35	9.86	10.45	10.91
	38	4.87	5.12	5.31	5.46	5.58	5.70	5.73	8.95	9.42	9.78	10.06	10.26	10.50	10.54	38	10.18	10.70	11.10
	40	4.93	5.17	5.36	5.49	5.59	5.70	5.70	9.10	9.53	9.86	10.11	10.29	10.49	10.50	40	10.30	10.80	11.20
	45	5.07	5.26	5.39	5.49	5.58	5.63	5.61	9.33	9.68	9.93	10.13	10.26	10.38	10.32	45	10.59	10.99	11.26
	50	5.10	5.24	5.36	5.42	5.48	5.49	5.42	9.39	9.65	9.85	9.99	10.07	10.11	10.00	50	10.66	10.95	11.20
R407C	30	3.79	4.06	4.28	4.43	4.55	4.66	4.66	6.96	7.47	7.86	8.15	8.36	8.57	8.60	30	7.92	8.48	8.94
	35	4.12	4.65	4.50	4.61	4.70	4.77	4.75	7.58	7.99	8.28	8.50	8.64	8.76	8.74	35	8.61	9.72	9.40
	38	4.28	4.46	4.60	4.70	4.77	4.80	4.77	7.88	8.22	8.47	8.65	8.76	8.85	8.78	38	8.94	9.32	9.61
	40	4.38	4.55	4.66	4.75	4.80	4.83	4.77	8.06	8.36	8.58	8.74	8.83	8.89	8.79	40	9.15	9.51	9.74
	45	4.56	4.68	4.77	4.83	4.85	4.85	4.77	8.39	8.63	8.79	8.89	8.95	8.92	8.76	45	9.53	9.78	9.97
	50	4.68	4.77	4.82	4.85	4.87	4.82	4.70	8.46	8.78	8.88	8.93	8.95	8.86	8.65	50	9.78	9.97	10.07
R22	30	3.63	3.92	4.14	4.31	4.44	4.61	4.68	6.68	7.21	7.63	7.95	8.18	8.49	8.61	30	7.59	8.19	8.65
	35	3.97	4.21	4.39	4.53	4.63	4.75	4.78	7.32	7.75	8.08	8.33	8.53	8.75	8.81	35	8.30	8.80	9.17
	38	4.14	4.36	4.51	4.63	4.72	4.82	4.83	7.64	8.01	8.31	8.53	8.70	8.88	8.90	38	8.65	9.11	9.42
	40	4.26	4.44	4.58	4.70	4.77	4.85	4.87	7.82	8.17	8.43	8.64	8.78	8.93	8.95	40	8.90	9.28	9.57
	45	4.46	4.61	4.73	4.82	4.87	4.92	4.90	8.22	8.50	8.71	8.86	8.97	9.06	9.03	45	9.32	9.63	9.88
	50	4.63	4.75	4.83	4.90	4.93	4.95	4.90	8.53	8.74	8.90	9.01	9.08	9.11	9.04	50	9.68	9.93	10.09
R134a	30	2.89	3.08	3.23	3.33	3.40	3.45	3.41	5.31	5.67	5.93	6.11	6.24	6.33	6.29	30	6.04	6.44	6.75
	35	3.14	3.30	3.40	3.46	3.52	3.53	3.46	5.79	6.07	6.26	6.39	6.46	6.49	6.39	35	6.56	6.90	7.10
	38	3.28	3.40	3.48	3.53	3.57	3.57	3.50	6.04	6.26	6.42	6.51	6.57	6.56	6.43	38	6.85	7.10	7.27
	40	3.35	3.46	3.53	3.58	3.60	3.58	3.50	6.18	6.38	6.51	6.58	6.63	6.58	6.45	40	7.00	7.23	7.38
	45	3.52	3.58	3.63	3.65	3.65	3.60	3.50	6.46	6.60	6.68	6.72	6.72	6.63	6.43	45	7.36	7.48	7.59
	50	3.62	3.67	3.68	3.68	3.67	3.58	3.46	6.65	6.74	6.78	6.78	6.75	6.60	6.38	50	7.56	7.67	7.69
R404A	30	2.70	2.89	3.04	3.13	3.19	3.24	3.21	4.97	5.33	5.58	5.76	5.89	5.97	5.90	30	5.64	6.04	6.35
	35	2.89	3.03	3.13	3.19	3.23	3.23	3.18	5.32	5.57	5.76	5.88	5.95	5.96	5.83	35	6.04	6.33	6.54
	38	2.96	3.08	3.14	3.19	3.21	3.19	3.11	5.43	5.65	5.79	5.88	5.92	5.89	5.74	38	6.19	6.44	6.56
	40	2.97	3.08	3.14	3.18	3.19	3.16	3.06	5.47	5.67	5.78	5.85	5.88	5.82	5.64	40	6.21	6.44	6.56
	45	3.01	3.08	3.11	3.13	3.11	3.04	2.92	5.53	5.65	5.72	5.74	5.72	5.61	5.39	45	6.29	6.44	6.50
	50	2.96	2.99	3.01	2.99	2.97	2.87	2.72	5.45	5.51	5.53	5.51	5.46	5.29	5.01	50	6.19	6.25	6.29

额定能力 (kW) Rated capacity																			
	冷凝温度[°C] Condensing temperature	DPF-P01018							DPF-P01020										
		蒸发温度[°C] Evaporating temperature							蒸发温度[°C] Evaporating temperature										
		10	5	0	-5	-10	-20	-30	10	5	0	-5	-10	-20	-30	10	5	0	-5
R410A	30	9.15	9.88	10.49	10.95	11.31	11												

额定能力 (kW) Rated capacity																														
冷凝温度[°C] Condensing temperature	DPF-P01022							DPF-P01024																						
	蒸发温度[°C] Evaporating temperature							蒸发温度[°C] Evaporating temperature																						
	10	5	0	-5	-10	-20	-30	10	5	0	-5	-10	-20	-30	10	5	0													
R410A	30	13.67	14.77	15.67	16.36	16.89	17.57	17.82	16.27	17.57	18.65	19.47	20.10	20.92	21.21	30	20.33	22.02	23.35	24.33	25.18	26.16	26.51	28.04	30.36	32.20	33.55	34.72	36.07	36.55
	35	14.73	15.61	16.30	16.89	17.29	17.79	17.89	17.53	18.58	19.39	20.10	20.58	21.18	21.29	35	21.88	23.21	24.33	25.11	25.74	26.44	26.65	30.17	32.01	33.55	34.62	35.49	36.46	36.75
	38	15.20	15.98	16.58	17.04	17.42	17.79	17.89	18.09	19.02	19.73	20.28	20.73	21.18	21.29	38	22.58	23.77	24.69	25.39	25.95	26.51	26.58	31.14	32.78	34.04	35.01	35.78	36.55	36.65
	40	15.39	16.14	16.73	17.14	17.45	17.79	17.79	18.32	19.21	19.91	20.40	20.77	21.18	21.18	40	23.00	24.06	24.90	25.53	26.02	26.51	26.51	31.72	33.17	34.33	35.20	35.88	36.55	36.55
	45	15.83	16.42	16.83	17.14	17.42	17.57	17.51	18.84	19.54	20.02	20.40	20.73	20.92	20.84	45	23.56	24.40	25.11	25.60	25.88	26.16	26.02	32.49	33.65	34.62	35.30	35.68	36.07	35.88
	50	15.92	16.36	16.73	16.92	17.11	17.14	16.92	18.95	19.47	19.91	20.14	20.36	20.40	20.14	50	23.70	24.33	24.90	25.18	25.45	25.53	25.24	32.68	33.55	34.33	34.72	35.10	35.20	34.81
R407C	30	11.83	12.67	13.36	13.83	14.20	14.55	14.55	14.08	15.08	15.90	16.46	16.90	17.31	17.31	30	17.54	18.86	19.85	20.55	21.04	21.60	21.67	24.18	26.01	27.37	28.33	29.01	29.78	29.88
	35	12.86	14.52	14.05	14.39	14.67	14.89	14.83	15.31	17.27	16.72	17.13	17.46	17.72	17.65	35	19.15	20.12	20.90	21.39	21.81	22.09	22.02	26.40	27.75	28.82	29.49	30.07	30.46	30.36
	38	13.36	13.92	14.36	14.67	14.89	14.98	14.89	15.90	16.57	17.09	17.46	17.72	17.83	17.72	38	19.85	20.76	21.39	21.81	22.09	22.30	22.09	27.37	28.62	29.49	30.07	30.46	30.75	30.46
	40	13.67	14.20	14.55	14.83	14.98	15.08	14.89	16.27	16.90	17.31	17.65	17.83	17.94	17.72	40	20.27	21.11	21.67	22.02	22.30	22.37	22.16	27.95	29.11	29.88	30.36	30.75	30.85	30.56
	45	14.23	14.61	14.89	15.08	15.14	15.14	14.89	16.94	17.39	17.72	17.94	18.02	18.02	17.72	45	21.18	21.74	22.16	22.44	22.51	22.51	22.09	29.20	29.98	30.56	30.94	31.04	31.04	30.46
	50	14.61	14.89	15.05	15.14	15.20	15.05	14.67	17.39	17.72	17.91	18.02	18.09	17.91	17.46	50	21.67	22.09	22.37	22.51	22.58	22.30	21.81	29.88	30.46	30.85	31.04	31.14	30.75	30.07
R22	30	11.33	12.24	12.92	13.45	13.86	14.39	14.61	13.49	14.56	15.38	16.01	16.49	17.13	17.39	30	16.83	18.23	19.28	20.06	20.69	21.46	21.74	23.21	25.14	26.59	27.66	28.53	29.59	29.98
	35	12.39	13.14	13.70	14.14	14.45	14.83	14.92	14.75	15.64	16.31	16.83	17.20	17.65	17.65	35	18.44	19.57	20.41	21.04	21.53	22.09	22.23	25.43	26.98	28.14	29.01	29.69	30.46	30.65
	38	12.92	13.61	14.08	14.45	14.73	15.05	15.08	15.38	16.20	16.75	17.20	17.53	17.91	17.94	38	19.28	20.20	20.97	21.53	21.95	22.37	22.44	26.59	27.85	28.91	29.69	30.27	30.85	30.94
	40	13.30	13.86	14.30	14.67	14.89	15.14	15.20	15.83	16.49	17.01	17.46	17.72	18.02	18.09	40	19.78	20.62	21.32	21.81	22.16	22.58	22.58	27.27	28.43	29.40	30.07	30.56	31.14	31.14
	45	13.92	14.39	14.77	15.05	15.20	15.36	15.30	16.57	17.13	17.57	17.91	18.09	18.28	18.20	45	20.76	21.46	22.02	22.37	22.65	22.86	22.79	28.62	29.59	30.36	30.85	31.23	31.52	31.43
	50	14.45	14.83	15.08	15.30	15.39	15.45	15.30	17.20	17.65	17.94	18.20	18.32	18.39	18.20	50	21.53	22.09	22.44	22.79	22.93	23.00	22.79	29.69	30.46	30.94	31.43	31.62	31.72	31.43
R134a	30	9.02	9.61	10.08	10.40	10.61	10.77	10.64	10.74	11.44	12.00	12.37	12.63	12.82	12.67	30	13.39	14.31	15.00	15.43	15.78	15.99	15.85	18.47	19.73	20.69	21.27	21.76	22.05	21.85
	35	9.80	10.30	10.61	10.80	10.99	11.02	10.80	11.67	12.26	12.63	12.85	13.08	13.11	12.85	35	14.66	15.36	15.78	16.13	16.34	16.41	16.13	20.21	21.18	21.76	22.24	22.53	22.63	22.24
	38	10.24	10.61	10.86	11.02	11.14	11.14	10.93	12.19	12.63	12.93	13.11	13.26	13.26	13.00	38	15.21	15.78	16.20	16.48	16.55	16.55	16.20	20.98	21.76	22.34	22.72	22.82	22.34	22.34
	40	10.46	10.80	11.02	11.18	11.24	11.18	10.93	12.45	12.85	13.11	13.30	13.37	13.30	13.00	40	15.57	16.06	16.41	16.62	16.69	16.55	16.27	21.47	22.14	22.63</td				

额定能力 (kW) Rated capacity																		
冷凝温度[°C] Condensing temperature	DPF-P03040							DPF-P03045										
	蒸发温度[°C] Evaporating temperature							蒸发温度[°C] Evaporating temperature										
	10	5	0	-5	-10	-20	-30	10	5	0	-5	-10	-20	-30	10	5	0	
R410A	30	40.64	44.01	46.67	48.63	50.33	52.28	52.98	50.83	55.03	58.37	60.81	62.93	65.38	66.25			
	35	43.73	46.40	48.63	50.18	51.44	52.85	53.27	54.69	58.02	60.81	62.75	64.33	66.09	66.61			
	38	45.14	47.52	49.34	50.75	51.86	52.98	53.13	56.45	59.42	61.70	63.46	64.86	66.25	66.43			
	40	45.98	48.08	49.76	51.02	52.01	52.98	52.98	57.50	60.13	62.23	63.80	65.04	66.25	66.25			
	45	47.09	48.78	50.18	51.17	51.72	52.28	52.01	58.89	61.00	62.75	63.99	64.67	65.38	65.04			
	50	47.37	48.63	49.76	50.33	50.88	51.02	50.46	59.24	60.81	62.23	62.93	63.62	63.80	63.10			
R407C	30	35.05	37.70	39.67	41.06	42.05	43.17	43.31	43.83	47.15	49.61	51.35	52.58	53.98	54.16			
	35	38.27	40.22	41.78	42.75	43.59	44.15	44.01	47.85	50.30	52.24	53.45	54.51	55.21	55.03			
	38	39.67	41.49	42.75	43.59	44.15	44.57	44.15	49.61	51.88	53.45	54.51	55.21	55.74	55.21			
	40	40.51	42.20	43.31	44.01	44.57	44.72	44.30	50.66	52.77	54.16	55.03	55.74	55.92	55.39			
	45	42.33	43.46	44.30	44.85	44.99	44.99	44.15	52.93	54.34	55.39	56.08	56.26	56.26	55.21			
	50	43.31	44.15	44.72	44.99	45.14	44.57	43.59	54.16	55.21	55.92	56.26	56.45	55.74	54.51			
R22	30	33.64	36.44	38.54	40.09	41.35	42.89	43.46	42.07	45.57	48.20	50.14	51.71	53.64	54.34			
	35	36.86	39.11	40.79	42.05	43.04	44.15	44.43	46.10	48.90	51.01	52.58	53.82	55.21	55.56			
	38	38.54	40.37	41.91	43.04	43.88	44.72	44.85	48.20	50.48	52.40	53.82	54.87	55.92	56.08			
	40	39.53	41.21	42.62	43.59	44.30	45.14	45.14	49.43	51.53	53.29	54.51	55.39	56.45	56.45			
	45	41.49	42.89	44.01	44.72	45.27	45.69	45.56	51.88	53.64	55.03	55.92	56.61	57.13	56.97			
	50	43.04	44.15	44.85	45.56	45.83	45.98	45.56	53.82	55.21	56.08	56.97	57.32	57.50	56.97			
R134a	30	26.77	28.60	29.99	30.83	31.54	31.96	31.67	33.48	35.76	37.50	38.55	39.44	39.97	39.61			
	35	29.29	30.70	31.54	32.24	32.66	32.80	32.24	36.63	38.39	39.44	40.31	40.84	41.02	40.31			
	38	30.41	31.54	32.38	32.93	33.08	33.08	32.38	38.03	39.44	40.49	41.18	41.36	41.36	40.49			
	40	31.12	32.09	32.80	33.22	33.35	33.08	32.51	38.92	40.13	41.02	41.55	41.71	41.36	40.66			
	45	32.66	33.35	33.77	33.92	33.92	33.35	32.51	40.84	41.71	42.23	42.42	42.42	41.71	40.66			
	50	33.64	34.06	34.19	34.19	34.06	33.35	32.09	42.07	42.60	42.76	42.76	42.60	41.71	40.13			
R404A	30	25.09	26.92	28.18	29.15	29.72	30.14	29.86	31.38	33.66	35.24	36.45	37.16	37.68	37.34			
	35	26.77	28.18	29.02	29.72	29.99	29.99	29.44	33.48	35.24	36.29	37.16	37.50	37.50	36.81			
	38	27.47	28.45	29.29	29.72	29.86	29.72	29.02	34.35	35.58	36.63	37.16	37.34	37.16	36.29			
	40	27.61	28.60	29.15	29.57	29.57	29.29	28.45	34.53	35.76	36.45	36.98	36.63	35.58				
	45	27.89	28.31	28.87	29.02	28.87	28.31	27.19	34.88	35.40	36.11	36.29	36.11	35.40	34.01			
	50	27.47	27.76	27.89	27.76	27.61	26.63	25.37	34.35	34.71	34.88	34.71	34.53	33.30	31.72			

额定能力 (kW) Rated capacity																		
冷凝温度[°C] Condensing temperature	DPF-P03055							DPF-P03065										
	蒸发温度[°C] Evaporating temperature							蒸发温度[°C] Evaporating temperature										
	10	5	0	-5	-10	-20	-30	10	5	0	-5	-10	-20	-30	10	5	0	
R410A	30	67.76	73.37	77.81	81.07	83.90	87.16	88.32	101.65	110.06	116.73	121.62	125.86	130.76	132.50			
	35	72.91	77.35	81.07	83.66	85.76	88.11	88.81	109.37	116.04	121.62	125.50	128.65	132.17	133.22			
	38	75.25	79.21	82.26	84.60	86.46	88.32	88.57	112.88	118.83	123.40	126.91	129.71	132.50				

SPF 系列电子膨胀阀

SPF Series electronic expansion valve



SPF12.5/25




SPF50/100




SPF250/400

外型尺寸 Overall dimension

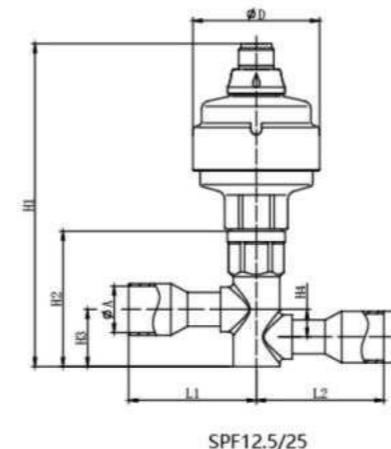

SPF12.5/25

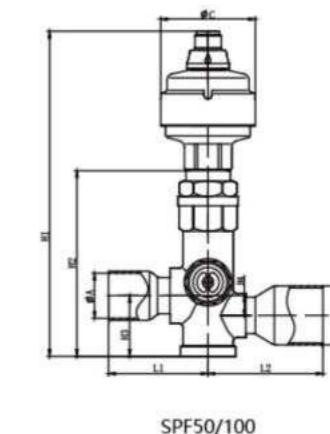

SPF50/100

Model	H1	H2	H3	H4	L1	L2	A	B	C
SPF12.5-5-5	152.5	64	27	13	60.5	60.5	16.1	16.1	60
SPF12.5-7-7	152.5	64	27	13	60.5	60.5	22.3	22.3	60
SPF25-5-5	152.5	64	27	13	60.5	60.5	16.1	16.1	60
SPF25-7-7	152.5	64	27	13	60.5	60.5	22.3	22.3	60
SPF50-7-7	206.3	118	38.5	12.5	56	56	22.3	22.3	60
SPF50-9-9	206.3	118	38.5	12.5	63	63	28.7	28.7	60
SPF50-7-9	206.3	118	38.5	12.5	56	63	22.3	28.7	60
SPF50-9-11	206.3	118	38.5	12.5	63	73	28.7	35.2	60
SPF100-9-9	206.3	118	38.5	12.5	63	63	28.7	28.7	60
SPF100-9-11	206.3	118	38.5	12.5	63	73	28.7	35.2	60

产品概述 Product Description

SPF型系列电子膨胀阀适用于商用冷柜、大型冷库和热泵等制冷系统中，精确控制系统中制冷剂流量，使系统始终在最佳状态下运行，达到快速制冷，实现精准控制和节能的目的。

SPF series electronic expansion valve is suitable for refrigeration systems such as commercial refrigerators, large refrigeration storages and heat pumps. It can accurately control the refrigerant flow in the system, so that the system can always run in the best state, achieve rapid cooling, and achieve the goal of precise control and energy saving.


特点 Features

- 集电磁阀、膨胀阀、视液镜功能于一体，性能稳定可靠；
- 反应和动作速度快，调节精准；
- 膨胀阀新结构设计，易拆卸清理，噪音低；
- SPF系列产品采用平衡口设计，逆向开阀压力高，具有双向截止功能；
- 适用于少油或无油系统。


- Integrated with the function of solenoid valve, expansion valve and sight glass, stable and reliable performance;
- Fast response and action, precise adjustment;
- New structure design of expansion valve, easy to dismantle and clean, low noise;
- SPF series products apply a balanced port design with high reverse valve opening pressure, and have bidirectional cut-off function;
- Suitable for systems with little oil or no oil.

技术参数 Technical Parameters

适用制冷剂 Applicable refrigerant	HCFC或HFC
名义容量 Nominal capacity	43~1936KW
介质温度 Medium temperature	-40~+65°C
环境温度 Environment temperature	-40°C ~ +60°C
环境湿度 Environment humidity	95%RH以下
全开脉冲 Full open pulse	2620~3800 (详见选型表) see model select table for detail
额定电压 Rated voltage	12V DC ($\pm 10\%$) , 矩形波 rectangular wave
励磁方式 Excitation mode	2-2相励磁, 双极驱动 2-2 phase excitation, double pole drive
励磁速度 Excitation speed	250pps/300pps, 电压/电流 voltage/ current
结束励磁模式保持 Finishing excitation mode keeps	0.1~1.0s
驱动电流 Drive current	230mA
线圈电阻 Coil resistance	52Ω/相
线圈绝缘等级 Coil insulation grade	E级
防护等级 Protect grade	IP65

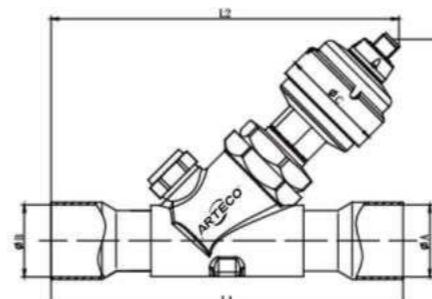





SPF250/400

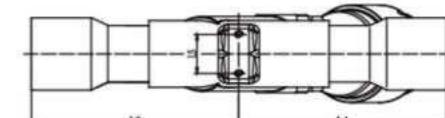

型号 Model	H1	L1	L2	L3	L4	L5	A	B	C
SPF250-9-9	206.3	168.5	184.3	84.3	84.3	24	28.7	28.7	60
SPF250-11-11	206.3	203	189.3	89.3	89.3	24	35.2	35.2	60
SPF400-13-13	206.3	203	201.5	101.5	101.5	24	41.5	41.5	60
SPF400-17-17	206.3	242	221	121	121	24	54.2	54.2	60



注：接管尺寸可以根据要求定制。

Note: dimension of connecting pipe can be customized according to requirements

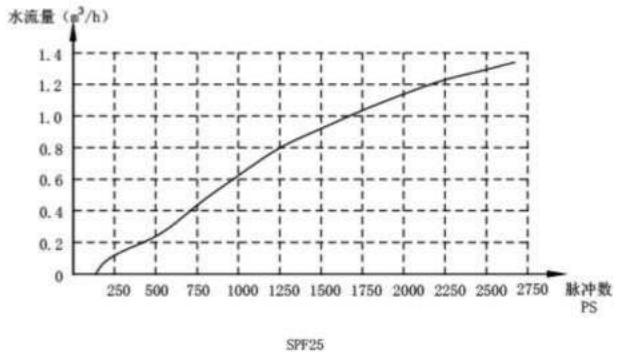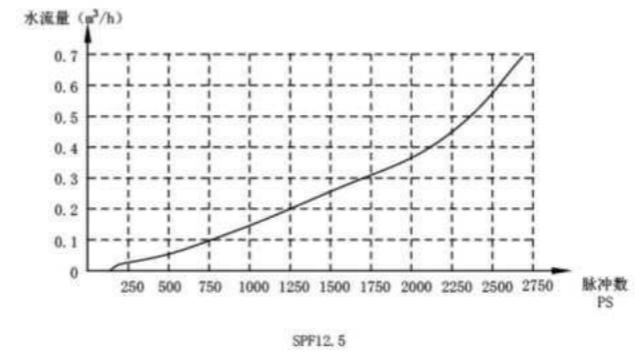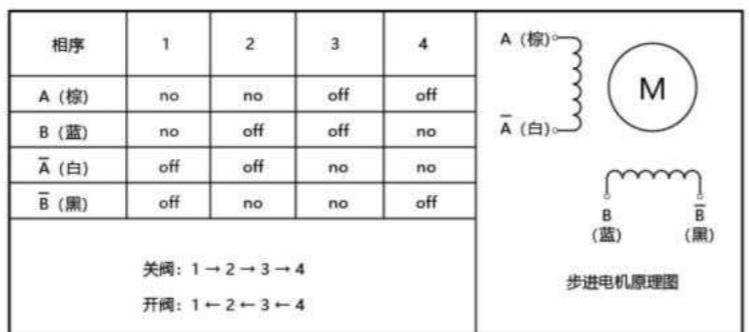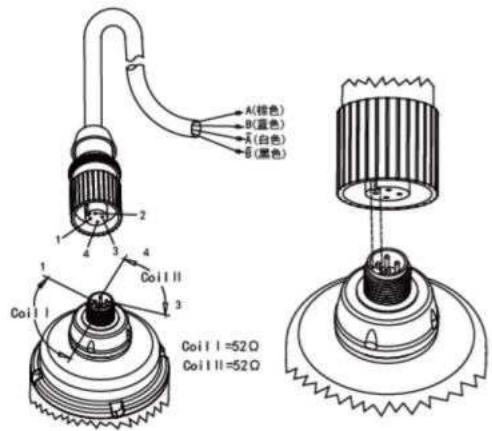

连接线缆总成 Connecting cable assembly

型号 Model	温度范围 Temperature range	长度 Length	接头规格 Connector specification	与控制连接方式 Connecting mode with control	示意图 Schematic pic.
M124×Z1MD	-40°C~+80°C	1米	M12×1 (防水)	引出线4×0.18mm²	

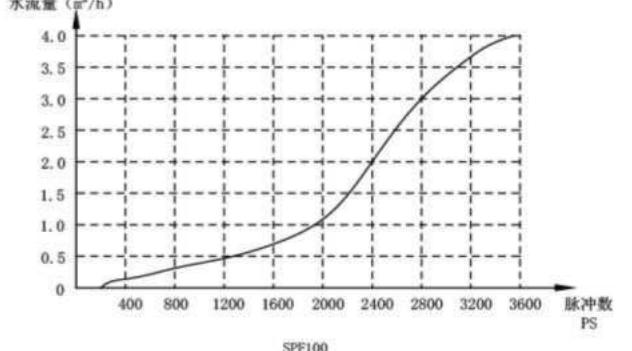
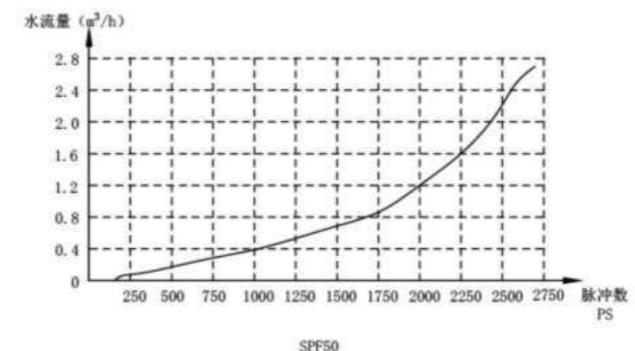


选型表 Model selection

产品系列 Product series	全开步数 Full open steps	通径 Diameter	KV ²⁾	名义容量 [KW] ¹⁾ Nominal capacity				最大工作压力 Max working pressure	最大工作压差 Max working pressure difference	逆向开阀压差 Reverse valve opening pressure difference	
				[m³/h]	R22	R134a	R407C ³⁾				
SPF12.5	2620	4.50	0.70	57	45	63	43	70	4.5	3.5	≥3.5
SPF25	2620	8.00	1.30	112	89	124	84	139	4.5	3.5	≥3.5
SPF50	2620	11.5	2.30	226	182	265	173.5	274	4.5	3.5	≥3.5
SPF100	3500	16.0	3.90	408	325	455	308	496	4.5	3.5	≥3.5
SPF250	3800	24.0	12.2	1092	862	1203	817	/	3.5	3.0	≥3.0
SPF400	3800	30.0	17.0	1768	1397	1936	1324	/	3.5	3.0	≥3.0

名义工况: Nominal condition:

- 额定能力基于: R407C 冷凝温度Tc: +32°C; 蒸发温度Te: +5°C; 阀前液体温度Ti: +28°C;
- Kv值: 基于密度为1T/m³的水、阀门两端压差等于100KPa时的正向流动能力。
- Rated capacity is based on: R407C condensing temperature Tc: +32°C; evaporating temperature Te: +5°C; liquid temperature before valve Ti: +28°C ;
- Kv value: the pressure difference based on the two sides between water with density 1T/m³ and the valve is equal to the positive flow capacity at 100Kpa.

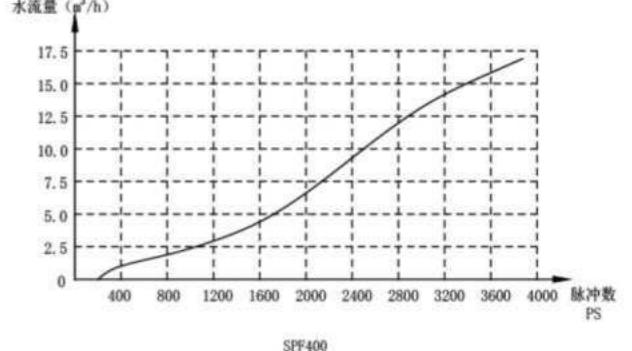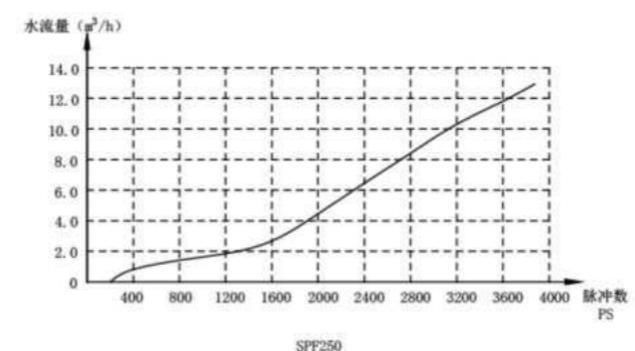

te[°C]		正向流额定能力[KW] Positive flow rated capacity																	
		SPF12.5									SPF25								
		压降△P[bar] Pressure drop																	
		2	4	6	8	10	12	14	16	2	4	6	8	10	12	14	16	2	4
R22	-40	39.6	50.6	57.1	61.2	64.1	65.9	67.0	67.6	82.0	105.4	118.5	126.6	133.6	137.0	139.3	140.9		
	-30	39.2	50.6	57.3	61.7	64.7	66.7	68.1	68.8	81.8	104.5	119.3	128.7	134.0	139.2	141.5	143.4		
	-20	38.5	50.1	57.1	61.7	64.9	67.1	68.6	69.4	80.3	104.3	118.9	128.7	134.8	140.0	143.0	144.7		
	-10	37.5	49.2	56.3	61.2	64.5	66.9	68.5	69.5	78.1	102.5	117.0	127.5	134.6	138.5	142.8	144.6		
	-5	36.9	48.6	55.8	60.7	64.1	66.5	68.2	69.2	76.9	101.1	116.3	126.2	133.3	138.8	142.2	144.4		
	10	34.7	40.3	53.3	58.3	62.0	64.4	66.2	67.4	72.3	96.2	111.3	121.7	129.2	134.4	138.2	140.6		
R134a	-40	35.1	42.6	46.1	47.8	48.3	47.9	47.0	45.6	73.1	88.8	95.8	99.7	100.6	99.9	98.0	94.9		
	-30	35.3	43.4	47.3	49.3	50.0	49.9	49.2	47.9	73.5	90.4	98.5	102.6	104.2	104.0	102.4	99.9		
	-20	35.1	43.7	48.1	50.4	51.3	51.4	50.9	49.9	73.3	91.1	100.2	104.8	107.0	107.2	106.2	104.0		
	-10	34.7	43.7	48.4	50.9	52.2	52.5	52.2	51.3	72.3	91.0	100.8	106.2	108.7	109.5	108.9	107.0		
	-5	34.3	43.5	48.3	51.0	52.4	52.9	52.6	51.8	71.6	90.6	100.7	106.4	109.3	110.3	109.8	108.2		
	10	32.8	42.2	47.4	50.5	52.2	52.9	53.0	52.4	68.3	87.6	98.9	105.1	108.9	110.4	110.5	109.3		
R404A	-40	31.4	39.0	42.8	44.5	45.2	45.1	44.4	43.2	65.7	81.4	89.2	93.0	94.3	94.0	92.5	90.0		
	-30	31.1	38.9	43.0	45.1	46.0	46.0	45.5	44.4	64.7	81.2	89.7	94.0	95.9	96.1	94.9	92.8		
	-20	30.3	38.4	42.7	45.0	46.2	46.4	46.1	45.2	63.0	80.1	89.1	94.0	96.3	96.9	96.1	94.3		
	-10	29.1	37.4	41.9	44.4	45.7	46.2	46.0	45.2	60.7	78.0	87.4	92.7	95.4	96.3	95.9	94.4		
	-5	28.5	36.8	41.3	44.0	45.3	45.8	45.6	44.9	59.4	76.6	86.1	91.6	94.5	95.5	95.2	93.8		
	10	26.1	34.1	38.6	41.3	42.9	43.5	43.5	43.9	54.3	71.0	80.3	86.0	89.2	90.5	90.4	89.3		
R407C	-40	41.5	52.0	57.7	61.1	63.0	64.0	64.1	63.7	86.0	108.0	120.2	127.0	131.4	132.8	133.2	132.5		
	-30	41.3	52.2	58.3	62.1	64.2	65.3	65.7	65.4	85.5	108.5	121.0	128.9	133.3	135.8	137.1	136.1		
	-20	40.6	52.0	58.4	62.5	64.8	66.2	66.8	66.8	84.2	108.0	121.4	129.7	134.8	137.7	138.9	138.8		
	-10	39.6	51.2	57.9	62.2	64.9	66.5	67.3	67.4	82.0	106.4	119.9	129.2	134.9	138.7	139.8	140.6		
	-5	39.0	50.7	57.5	61.9	64.6	66.3	67.2	67.4	81.3	105.2	120.0	128.4	134.9	138.4	139.7	140.6		
	10	36.6	48.2	55.2	59.7	62.8	64.5	65.7	66.1	76.3	100.5	114.5	124.6	130.9	134.2	137.1	137.9		
R410A	-40	45.7	59.1	67.1	72.4	76.2	78.7	80.4	81.4	94.9	122.7	139.0	150.6	157.8	163.1	166.6	168.3		
	-30	44.5	58.1	66.3	71.9	75.8	78.5	80.4	81.5	91.9	120.7	137.9	149.0	157.1	162.8	165.2	169.3		
	-20	43.0	56.6	64.9	70.6	74.7	77.5	79.5	80.8	89.6	117.1	135.4	146.4	154.8	161.0	165.4	167.6		
	-10	41.0	54.4	62.8	68.6	72.7	75.7	77.7	79.1	85.5	113.5	131.0	143.1	151.7	157.9	162.2	165.0		
	-5	39.9	53.1	61.5	67.3	71.4	74.4	76.5	77.8	83.3	109.7	127.2	139.1	147.9	154.6	158.5	162.5		
	10	36.2	48.5	56.5	62.1	66.1	69.1	71.1	72.4	74.9	101.2	116.8	128.5	136.9	143.0	147.3	151.2		

te[°C]		正向流额定能力[KW] Positive flow rated capacity																	
		SPF50									SPF100								
		压降△P[bar] Pressure drop																	
		2	4	6	8	10	12	14	16	2	4	6	8	10	12	14	16	2	4
R22	-40	151.8	194.3	218.1	234.1	245.6	252.1	256.8	258.9	282.1	360.6	406.6	436.7	456.6	469.7	478.0	482.4		
	-30	150.0	193.1	218.0	236.0	247.8	255.7	260.2	263.6	279.1	359.8	407.6	439.4	46					

正向流额定能力[KW] Positive flow rated capacity																		
te[°C]	SPF250	SPF400																
		压降△P[bar] Pressure drop																
		2	4	6	8	10	12	14	16	2	4	6	8	10	12	14	16	
R22	-40	778.5	995.0	1121.0	1205.0	1259.5	1297.0	1318.5	1328.5	1249.2	1595.0	1799.0	1931.6	2021.1	2079.4	2115.6	2133.6	
	-30	771.0	992.5	1126.0	1213.5	1273.0	1262.5	1339.0	1351.5	1236.2	1593.0	1805.0	1945.7	2041.2	2105.5	2146.7	2169.8	
	-20	755.5	984.0	1120.5	1213.0	1276.0	1320.0	1348.5	1364.5	1213.1	1576.9	1798.0	1944.7	2046.2	2116.5	2161.8	2148.9	
	-10	737.0	966.0	1107.0	1201.5	1269.0	1315.0	1347.0	1366.0	1180.9	1548.7	1774.8	1927.6	2034.2	2108.5	2158.8	2189.9	
	-5	723.0	954.0	1095.0	1193.0	1260.5	1308.0	1341.0	1360.0	1161.8	1529.6	1756.8	1912.5	2021.1	2097.5	2149.7	2181.9	
	10	680.5	905.0	1049.0	1146.0	1218.0	1267.0	1303.0	1323.0	1091.4	1453.2	1681.4	1839.2	1951.7	2032.1	2088.4	2124.6	
R134a	-40	683.5	832.0	901.5	934.0	942.5	936.0	918.5	890.5	1097.5	1334.7	1446.2	1497.5	1512.6	1501.5	1472.4	1429.1	
	-30	687.0	846.0	924.0	963.0	976.0	974.5	960.0	935.0	1103.5	1357.8	1481.4	1542.7	1565.8	1562.8	1539.7	1501.5	
	-20	683.5	853.5	938.0	983.0	1002.0	1004.0	994.5	973.5	1099.5	1368.8	1505.5	1576.9	1608.0	1611.0	1595.0	1562.8	
	-10	676.0	853.0	944.0	995.0	1020.0	1025.5	1020.0	1002.0	1135.4	1366.8	1514.6	1595.0	1635.2	1645.2	1635.2	1608.0	
	-5	669.5	849.0	942.5	997.0	1023.0	1033.0	1029.0	1012.5	1074.4	1360.8	1513.5	1599.0	1642.2	1656.3	1649.2	1625.1	
	10	640.0	823.5	927.0	987.0	1020.0	1033.5	1033.0	1022.5	1026.1	1321.6	1485.4	1581.9	1635.2	1658.3	1659.3	1643.2	
R404A	-40	615.0	763.0	836.0	871.0	884.0	881.0	867.0	844.0	985.9	1223.1	1339.7	1397.0	1417.1	1413.0	1389.9	1352.7	
	-30	606.0	761.0	840.0	881.0	899.0	900.0	890.0	870.0	971.9	1220.1	1346.7	1413.0	1441.2	1443.2	1426.1	1394.0	
	-20	591.0	750.0	835.0	881.0	903.0	908.0	901.0	884.0	946.7	1203.0	1338.7	1412.1	1447.2	1455.3	1444.2	1417.1	
	-10	569.0	731.0	819.0	869.0	894.0	903.0	899.0	884.0	912.6	1171.8	1312.5	1392.9	1433.1	1447.2	1440.2	1418.1	
	-5	556.0	718.0	807.0	858.0	885.0	895.0	892.0	879.0	891.5	1150.8	1293.5	1375.9	1419.1	1435.2	1430.1	1409.0	
	10	510.0	665.0	754.0	806.0	836.5	849.0	849.0	836.5	818.1	1067.3	1210.1	1294.5	1341.7	1361.8	1360.8	1342.7	
R407C	-40	810.5	1016.0	1128.0	1194.0	1232.0	1248.5	1251.0	1242.5	1300.5	1630.1	1810.0	1914.6	1973.4	2002.0	2007.0	1994.0	
	-30	805.5	1021.0	1140.0	1211.5	1255.0	1276.0	1284.0	1278.0	1292.4	1637.2	1829.1	1943.7	2012.0	2047.2	2059.3	2051.2	
	-20	792.5	1016.0	1142.5	1220.0	1268.0	1294.0	1306.0	1303.0	1272.3	1629.1	1832.1	1956.8	2033.1	2075.4	2093.4	2092.4	
	-10	772.5	1002.0	1133.0	1216.0	1268.0	1298.0	1315.0	1315.5	1241.2	1606.0	1817.1	1949.7	2034.2	2083.4	2107.5	2111.5	
	-5	761.5	990.0	1123.0	1207.5	1264.0	1296.0	1314.0	1317.0	1221.1	1587.9	1802.0	1938.7	2026.1	2078.4	2105.5	2112.5	
	10	715.0	940.5	1076.5	1167.0	1226.0	1262.5	1284.5	1291.5	1146.7	1509.5	1727.6	1871.3	1965.8	2026.1	2059.3	2072.3	
R410A	-40	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	
	-30	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	
	-20	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	
	-10	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	
	-5	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	
	10	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	/	

The world is a book, and those who do not travel read only a page.

— Augustine of Hippo, Christian Philosopher

这世界像是一本书,而不旅行的人只读了一页。

— 希波的奥古斯丁 (基督教哲学家)

DPF/DPFS系列电子膨胀阀控制器

DPF/DPFS series electronic expansion valve controller



T0055 (一拖二)



T0056 (一拖三)

产品概述 Product Description

用于DPF/DPFS系列电子膨胀阀的过热度控制和机组控制，适用4相步进电机驱动的电子膨胀阀，以4相8拍1-2相励磁驱动方式控制。保障系统处于安全范围内运转，提高压缩机和系统的可靠性，降低系统功耗（提高系统COP），提高系统的制冷能力。

Used for super heat degree control and unit control of DPF/DPFS series electronic expansion valve, and suitable for the electronic expansion valve driven by 4 phase stepper motors and controlled by 4 phase 8 beat 1-2 phase excitation driving mode. Ensure the system is operating within a safe range, improve the reliability of compressor and system, reduce system power consumption (improve system COP), enhance the refrigerating capacity of system.

特点 Features

- 通过采集系统各部位温度信息，分析系统当前运行状态，运用模糊算法，使用自适应控制；
- 反应和动作速度快，调节精准；
- 电子膨胀阀控制器可根据系统参数设定，以适应不同的设备和工况需求；
- 导轨式安装方便。

- Analyze the system current running state by collecting temperature information of each part of the system, use fuzzy algorithms, and adopt self-adaptive control;
- Fast response and action, precise adjustment;
- The electronic expansion valve controller can be set according to the system parameters to adapt demands of different equipments and conditions;
- Easy installation of guide rail type

技术参数 Technical Parameters

使用环境 Working environment	温度-20~55°C, 相对湿度≤90%RH(无凝露) temperature -20~55°C, relative humidity ≤90%RH (no condensation)
保存环境 Storing environment	温度-40~80°C, 相对湿度≤95%RH(无凝露) temperature -40~80°C, relative humidity ≤95%RH(no condensation)
输入电源 Input power	单相交流110~220V/50Hz(60Hz) single phase alternative current 110~220V/50Hz(60Hz)
电子膨胀阀输出 Electronic expansion valve output	2路, 单相最大负荷输出0.5A/12V 2 way, single phase maximum load output 0.5A/12V
温度传感器输入 Temperature sensor input	5路(含压力传感器),温度传感器B3470/5K; 温度分辨率: 0.1°C 5 way (including pressure sensor), temperature sensor B3470/5K; temperature resolution: 0.1°C
压力传感器输入 Pressure sensor input	1路; 压力分辨率0.01Bar 1 way; pressure resolution: 0.01Bar
交流输入开关 AC input switch	2路 2 way
继电器输出 Relay output	2路无源开关, 负载能力: 5A/220V 2 way passive switch, load capacity: 5A/220V
通信接口 Communication interface	1路,RS485 1 way, RS485

选型表 Model selection

序号 No.	控制方式 Control method	代号 code	控制器型号 Controller model	适配器件型号 Adapter model	数量 Quantity	功能描述 Function description	设置参数 Set parameter
1	回气过热度控制 Air return super heat degree control	T0055	PCH-FP2N	电子膨胀阀 Electronic expansion valve	DPF、DPFS系列 DPF、DPFS series	1	一路主 (一拖一) 图1 One main way (1 carrying 1) PIC 1
				压力传感器 Pressure sensor	HS-P321-30- (-1~12) barG	1	
				温度传感器 Temperature sensor	NTC5K3470	1	
1	回气过热度控制 Air return super heat degree control	T0055	PCH-FP2N	电子膨胀阀 Electronic expansion valve	DPF、DPFS系列 DPF、DPFS series	2	二路主 (一拖二) 图2 Two main ways (1 carrying 2) Pic 2
				压力传感器 Pressure sensor	HS-P321-30- (-1~12) barG	1	
				温度传感器 Temperature sensor	NTC5K3470	2	
1	回气过热度控制 Air return super heat degree control	T0056	PCH-FP3N	电子膨胀阀 Electronic expansion valve	DPF、DPFS系列 DPF、DPFS series	3	三路主 (一拖三) 图3 Three main ways (1 carrying 3) Pic 3
				压力传感器 Pressure sensor	HS-P321-30- (-1~12) barG	1	
				温度传感器 Temperature sensor	NTC5K3470	3	
2	回气过热度+喷液冷却 Air return super heat degree+liquid injecting cooling	T0055	PCH-SP1L	电子膨胀阀 Electronic expansion valve	DPF、DPFS系列 DPF、DPFS series	2	一路主、一路辅 图4 One main way, one auxiliary Pic 4
				压力传感器 Pressure sensor	HS-P321-30- (-1~12) barG	1	
				温度传感器 Temperature sensor	NTC5K3470	2	

选型表 Model selection							
No	控制方式 Control method	代码 code	控制器型号 Controller model	适配器件型号 Adapter model	数量 Quantity	功能描述 Function description	
						设置参数 Set parameter	
3	回(排)气过热度+喷气增焓 Air return(exhaust) super heat degree+enhanced vapor injection	T0055	PCH-SD1G	电子膨胀阀 Electronic expansion valve	DPF、DPFS系列 DPF、DPFS series	2	一路主、一路辅 图5 One main way, one auxiliary Pic 5
				压力传感器 Pressure sensor	HS-P321-30- (-1~12) barG	0	201
				温度传感器 Temperature sensor	NTC5K3470	5	
4	排气过热度+喷液冷却 Air exhaust super heat degree+liquid injecting cooling	T0055	PCH-SD1L	电子膨胀阀 Electronic expansion valve	DPF、DPFS系列 DPF、DPFS series	2	一路主、一路辅 图6 One main way, one auxiliary Pic 6
				压力传感器 Pressure sensor	HS-P321-30- (-1~12) barG	0	201
				温度传感器 Temperature sensor	NTC5K3470	3	
5	排气过热度控制 Air exhaust super degree	T0055	PCH-SD1N	电子膨胀阀 Electronic expansion valve	DPF、DPFS系列 DPF、DPFS series	1	一路主 图7 One main way Pic 7
				压力传感器 Pressure sensor	HS-P321-30- (-1~12) barG	0	201
				温度传感器 Temperature sensor	NTC5K3470	3	

系统应用 Application in system

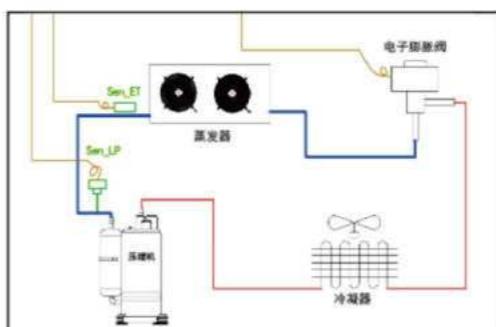


图1
回气过热度控制 (一拖一)
Air return super heat degree control (1 by 1)

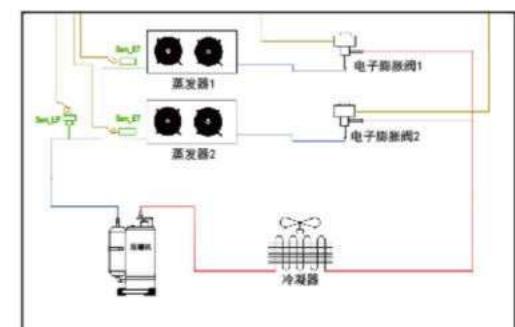


图2
回气过热度控制 (一拖二)
Air return super heat degree control (1 by 2)

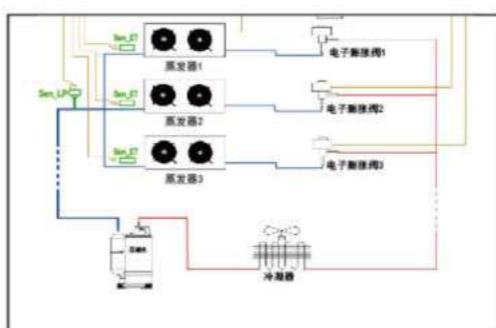


图3
回气过热度控制 (一拖三)
Air return super heat degree control (1 by 3)

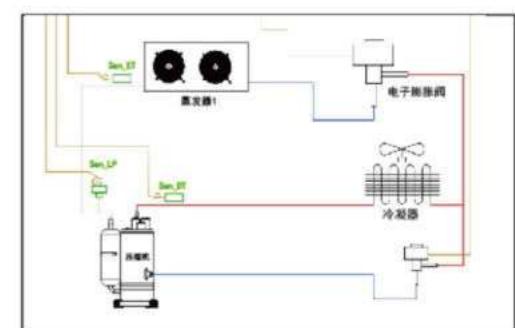


图4
热度+喷液冷却(一路主、一路辅)
Air return super heat degree+liquid injecting cooling
(One main way, one auxiliary)

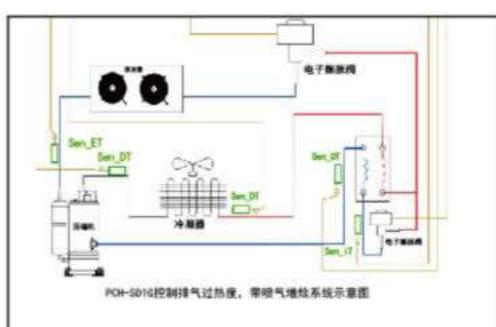


图5
回(排)气过热度+喷气增焓(一路主、一路辅)
Air return(exhaust) super heat degree+enhanced vapor injection
(One main way, one auxiliary)

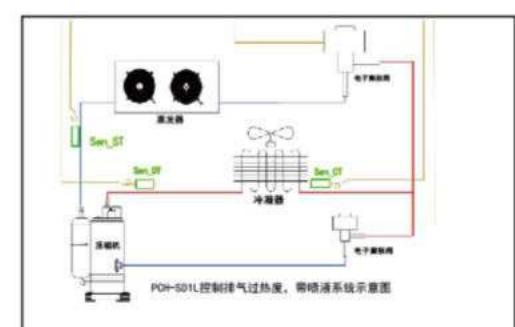


图6
排气过热度+喷液冷却(一路主、一路辅)
Air exhaust super heat degree+liquid injecting cooling
(One main way, one auxiliary)


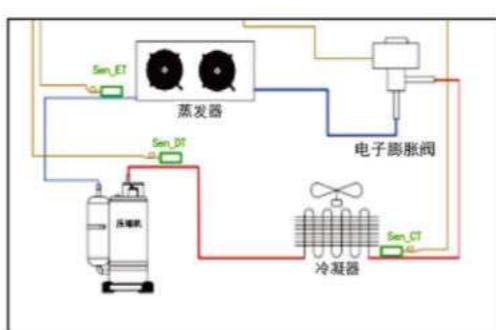


图7
排气过热度控制(一路主)
Air exhaust super degree(One main way)

外形尺寸 Overall dimension



接线图 Wiring drawing

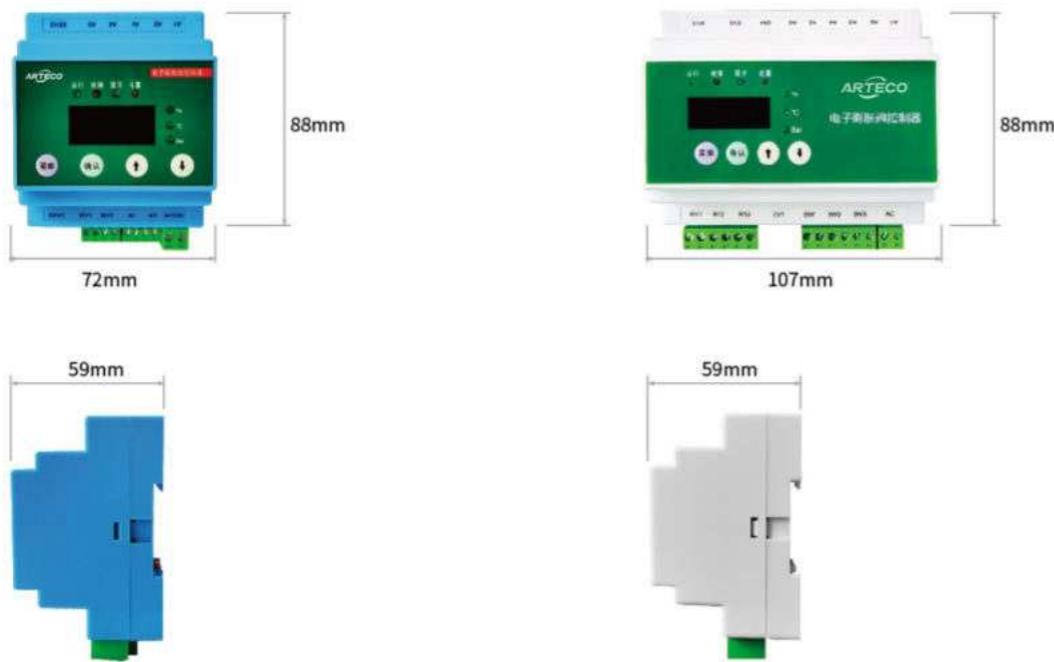

SPF系列电子膨胀阀控制器

Controller for SPF Series electric expansion valve



HS-1702

产品概述 Product Description

适用于SPF系列电子膨胀阀的过热度控制，以2相4拍双极励磁方式控制，提高系统的制冷能力。

It is suitable for super heat control of SPF series electronic expansion valves. It is controlled by 2 phase 4 beat bipolar excitation mode to improve the refrigerating capacity of the system.

特点 Features

- 多种制冷剂可选: R22, R134a, R404a, R410a, R507c;
- 多种类电子膨胀阀: 采用PID算法适用多种双极电子膨胀阀, 也可以自定义膨胀阀参数;
- MOP保护: 蒸发压力超压保护;
- LOP保护: 蒸发压力低压保护;
- 告警输出: 一路无源继电器触点输出;
- 集中监控: 可通过RS485通信方式进行开、关机, 参数设置, 数据查看。
- More refrigerants available: R22, R134a, R404a, R410a, R507c;
- more kinds of electronic expansion valve: the PID algorithm is applicable to various bipolar electronic expansion valve, and the parameters of the expansion valve can also be customized;
- MOP protection: evaporative pressure overpressure protection;
- LOP protection: evaporative pressure low-pressure protection;
- Alarm output: one way passive relay contact output;
- Centralized monitoring: ON-OFF, parameter setting, data check can be performed through RS485 communication.

技术参数 Technical Parameters

控制电源 control power	DC24V/650mA	
使用环境 using environment		
配置 dispose	<p>控制器 (HS-1702) 1件, 常温温度传感器 (NTC-NT05) 2件, 压力传感器(77CP055) 1件, 变压器 (KBE4825) 1件, 备用电源 (GFB300) 1件 Accessories: Controller (GEC1702) *1, Normal temp. sensor (NTC-NT05) *2, Pressure sensor (77CP055)*1, transformer (KBE4825) *1, backup power (GFB300) *1</p>	

配置一：常温温度传感器

Accessory I :Normal temperature sensor



NTC-NT05

接线图 Wiring Layout



技术参数 Technical Parameters

测量温度 Test range	-50~60°C
NTC热敏电阻(thermistor)	B25/85=3435K±1%, R25=10Ω±1%
线长(cable length)	5m
不锈钢管(sensor size)	φ6 X 50
防护等级(protection level)	IP68

配置二：压力传感器

Accessory II:pressure sensor



77CP055

技术参数 Technical Parameters

量程范围 test range	-1~12bar
精度 Accuracy	0.5% FS(-20~85°C)
工作温度 working temp.	-40~125°C
螺纹接口 Connection thread	7/16-20UNF (内螺纹 Female) . 带1/4喇叭口针阀顶开装置with depressor
接线方式 input power	4~20mA (红/黑, 两线制, 电流型 red/black, current mode)
连接线wire	AWG20 , L=3m

配置三: 变压器 Accessory III:Transformer



KBE4825

技术参数 Technical Parameters

输入 input	230VAC, 50/60Hz
输出 output	24V, MAX 10W
耐压 withstand voltage	3.5KW

配置四: 备用电源 Accessory IV:Backup power



GFB300

产品概述 Product Description

备用电源为超级电容模块，串联在供电电路中，可确保电源故障时保证控制器临时供电，立刻关闭链接的电子膨胀阀

The backup power supply is a super capacitor module, which is connected in series in the power supply circuit, which can ensure the temporary power supply of the controller in case of power failure, and immediately close the linked electronic expansion valve

技术参数 Technical Parameters

输入 input	24V/400mA
输出 output	12V/400mA
容量 capacity	50mA.h

EX 1230 电子膨胀阀控制器

EX 1230 electronic expansion valve controller



产品概述 Product Description

主要用于超市冷柜系统DPF/DPFS系列电子膨胀阀的过热度控制，以4相8拍1-2相励磁驱动方式精确控制冷媒流量，提高系统COP，达到快速制冷和节能的目的。

It is mainly used for super heat control of DPF/DPFS series electronic expansion valves in supermarket refrigerator system. It uses 4-phase 8- beat 1-2 phase excitation drive method to accurately control refrigerant flow, improve system COP and achieve the purpose of rapid cooling and energy saving.


特点 Features

- 集成有风机控制、除霜控制、供液阀控制、膨胀阀开度调节等，兼顾冷柜/冷库温控器功能；
- 通过压力对应温度控制过热度，过热度波动小、库温保持更平稳；
- 多种内置程序保证电子膨胀阀控制精准，确保制冷系统安全、可靠运行；
- 采用变过热度算法控制，使制冷系统效率更高；
- 可多个温控共用一个压力值控制，适合一个主机拖多冷风机或者冷柜场合，安装调试简便；
- 带RS485通信口，可接外部网络。




技术参数 Technical Parameters

传感器长 Length of sensor	1.5米(含探头) 1.5 meters (including probe)
感温元件 Temperature sensing element	NTC, R25II = 5K, B25/50II = 3470K
环境温度 Environment temperature	-10~45°C
工作湿度 Working humidity	5~85%RH (不结露) 5~85%RH (no condensation)
设定范围 Setting range	-40~120°C
显示范围 Display range	-50~130°C
电源电压 Power voltage	185~245Vac, 50/60Hz
端子接线 Terminal wiring	导线不超过 2*1.5mm ² , 或1*2.5mm ² lead wire no more than 2*1.5mm ² , or 1*2.5mm ²
整机尺寸 Dimension of whole machine	长 78 x 宽 34.5 x 深 71(毫米) length 78 * width 34.5 * depth 71(mm)
负载电流 Load current	5A, 250Vac (阻性负载) 5A, 250Vac (resistive load)
安装开孔 Installing hole	长 71 x 宽 29(毫米) length 71 * width 29(mm)
防护等级 Protection grade	IP65(前面板) IP65 (front panel)

压力传感器 Pressure sensor

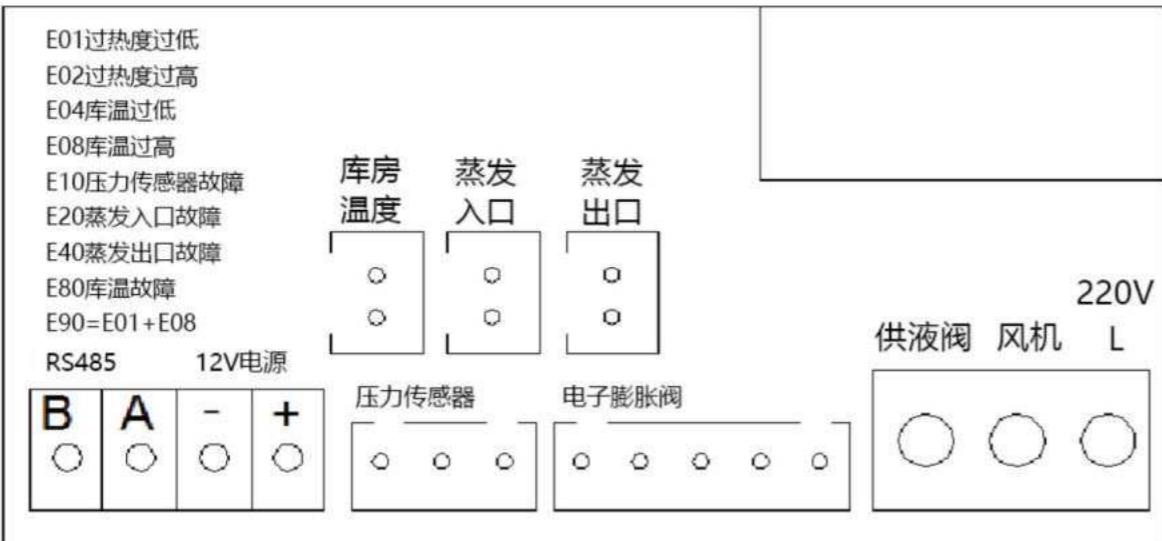

运用 Application

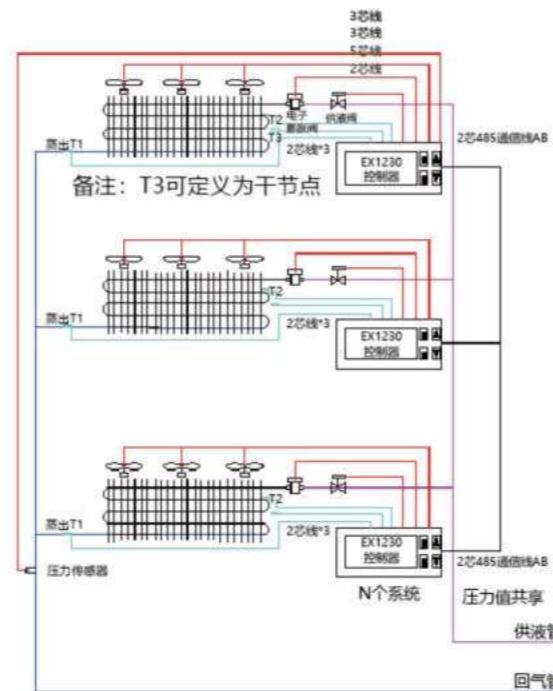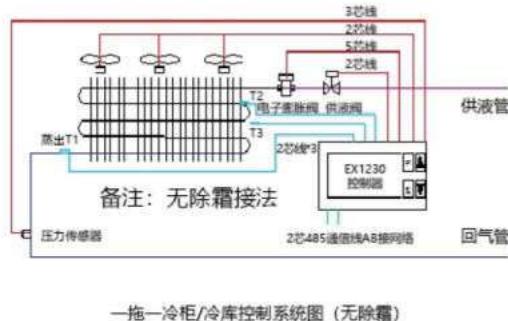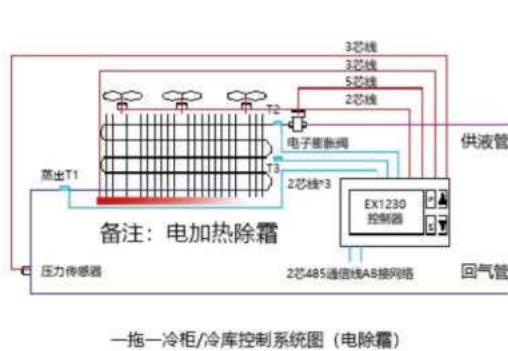

长 78(毫米) x 宽 34.5(毫米) x 深 71(毫米) length 78 * width 34.5* depth 71(mm)

电流型 (P224A)
Current type (P224A)电压型 (P321)
Voltage type (P321)

产品概述 Product Description

用于检测制冷系统工况的压力值

Used to check the pressure value of refrigerating system condition

特点 Features

- EMC/EMI适应变频环境应用;
- 瞬间保护电压: DC16V;
- 多种冷媒兼容, 应用范围广;
- 电源反接保护;
- 电流型压力传感器防结露设计;
- EMC/EMI adapts frequency conversion environment application;
- Instantaneous protective voltage: DC16V;
- Compatible with multiple refrigerants, wide application range;
- Power supply reverse connection protection;
- Anti-condensation design for current type pressure sensor


技术参数 Technical Parameters

型号 Model	P224A	P321
工作电压 Working Voltage	24VDC (15~32VDC)	5±0.25VDC
输出信号 Output Signal	4~20mA	0.5~4.5VDC
介质温度 Media Temperature	-40°C~125°C	
使用寿命 Service Life	大于1000万次 more than 10,000,000 times	
长期稳定性 Long-term stability	±0.5%FS/年 ±0.5%FS/Year	
防护等级 Protection level	IP66	

选型表 Model selection


型号 Model	压力范围 Pressure range	安全过载 Safety overload	破坏压力 Breaking pressure	工作电源 Working voltage	输出信号 Output signal	综合精度 Comprehensive Precision
HS-P321-30-10barG	0-10bar	30bar	160bar	5VDC	0.5~4.5VDC	±2.5%F.S
HS-P321-30-20barG	0-20bar	60bar	160bar	5VDC	0.5~4.5VDC	±2.5%F.S
HS-P321-30-30barG	0-30bar	90bar	250bar	5VDC	0.5~4.5VDC	±2.5%F.S
HS-P321-30-45barG	0-45bar	90bar	250bar	5VDC	0.5~4.5VDC	±2.5%F.S
HS-P321-30-(-1~12)barG	-1~12bar	36bar	160bar	5VDC	0.5~4.5VDC	±2.5%F.S
HS-P224A-30-11barG	-1~11bar	60bar	160bar	24VDC(12~23VDC)	4~20mA	±1%F.S
HS-P224A-30-18barG	0-18bar	60bar	160bar	24VDC(12~23VDC)	4~20mA	±1%F.S
HS-P224A-30-30barG	0-30bar	90bar	250bar	24VDC(12~23VDC)	4~20mA	±1%F.S
HS-P224A-30-50barG	0-50bar	90bar	250bar	24VDC(12~23VDC)	4~20mA	±1%F.S

外形尺寸 Overall dimension

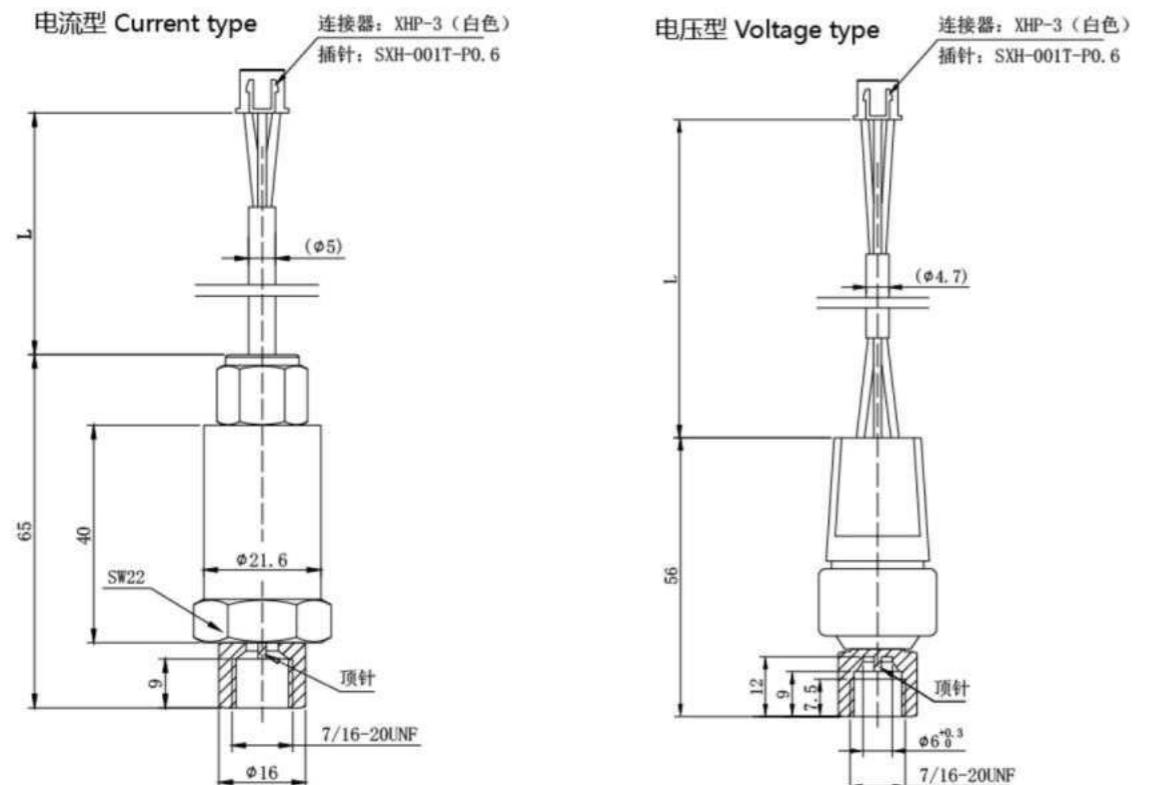


接线图 Wiring drawing

电流型 Current type

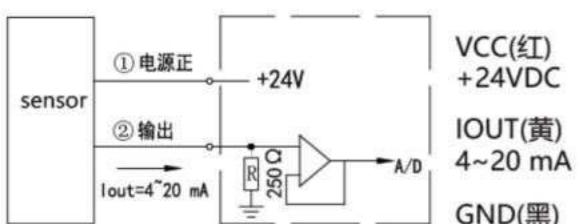

红: Red 白: White 黑: Black 黄: Yellow

电压型 Voltage type

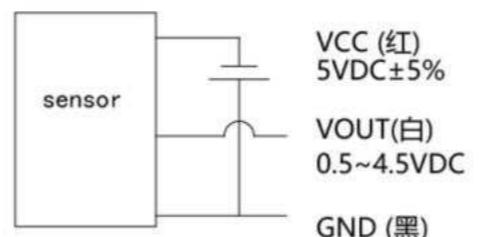

温度传感器 Temperature sensor



5K3470

产品概述 Product Description

用于检测制冷系统工况的温度值

Used to check the temperature value of refrigerating system condition

特点 Features

- 体积小，重量轻，防护性能好；
- 温度偏差小，精度高
- 测量范围 test range: -50~150°C

- Small size, light weight, good protective performance
- Small temperature deviation, high precision

型号 Model

NTC, R25II = 5K, B25/50II = 3470K

电动调节阀系列

MOTORIZED REGULATING VALVE *Series*

独特设计,实现零压差开启;
双稳态低功率设计,能耗低;
大口径阀门,紧凑设计,重量轻。

Unique design to achieve zero pressure differential opening.
Bistable low power design with low energy consumption.
Large diameter valves, compact design and light weight.



DHV型 电动调节阀

Model DHV Motorized Regulating Valve



DHV(D)



DHV(S)

产品概述 Product Description

- DHV(S/D) 型电动调节阀适用于系统低压差或0压差状态，不会出现不开启或卡死现象。
- DHV(S/D) 型电动调节阀一体式阀体结构，漏点少，更可靠。
- DHV(S/D) 型电动调节阀开度可调，驱动器控制阀芯位置，实现阀门流量可调节。
- DHV(S/D) 型电动调节阀大口径双稳态阀，既是常开阀，又是常闭阀。
- DHV(S/D) 型电动调节阀可提供控制器，也可阀门单独供货。

- DHV (S / D) Motorized Regulating Valve is suitable for low pressure difference or zero pressure difference of the system.
- DHV (S / D) Motorized Regulating Valve body structure, less leaking point, more reliable.
- DHV (S / D) Motorized Regulating Valve adjustable opening, driver Control spool position, Valve flow adjustable.
- DHV (S / D) Motorized Regulating Valve large caliber bistable valve, both normally open valve and normally closed valve.
- DHV (S / D) Motorized Regulating Valve can be supplied either as a controller or as an individual valve.

产品特点 Product characteristics

- 专为工业应用场合设计，最大工作压力5.2MPa；
- 应用新材料，直接焊接接口，焊接性能良好，耐高低温性能好；
- 大口径阀门，设计紧凑，重量轻；
- 阀盖可以任意方向安装而不影响阀门功能；
- 步进电机驱动，稳定性好（IP65）；
- 双稳态设计，能耗低。
- 大开阀力，垃圾不易卡死。
- 活塞行程大，工作流量大。
- 控制器备电设计，接入备电源，断电自动关闭。
- 焊接连接可达4.5in。

- Designed for industrial applications, maximum working pressure 5.2 MPa;
- Application of new materials, direct welding interface, welding performance is good, good resistance to high and low temperature;
- Large caliber valve, compact design, light weight;
- Bonnet can be installed in any direction without affecting valve function;
- Stepper motor drive, good stability (IP65);
- Bistable design, low energy consumption.
- Large opening valve force, garbage is not easy to jam.
- The piston stroke is large and the working flow is large.
- The controller is equipped with power supply, connected to the standby power supply, and the valve is automatically shut off when the power is cut off.
- Welding connection up to 4.5in.

技术参数 Technical Parameters

适用制冷剂 Applicable Refrigerants HCFC/HFC(客户指定 Customer specified)

适用介质温度 Applicable Medium Temperature -35°C ~ +105°C

适用环境温度 Application Ambient Temperature of -35°C ~ +65°C

额定功率/电压 Rated power/voltage 6W/DC12V

选型表 Model Selection

型号 Model	规格 Spec 接口 Connection	开启压差△P(bar) △P(bar)		最大工作压力(bar) Max Working Pressure(bar)	Kv值(m³/h) Kv value(m³/h)
		最小 Minimum	最大工作压力差MOPD 液体 Liquid MOP		
DHV(S)25-9	28				10
DHV(S)32-11	35				16
DHV(S)40-13	42				25
DHV(S)50-18	57				44
DHV(D)50-18	57				44
DHV(D)65-24	76	0	40	52	70
DHV(D)80-28	89				85
DHV(D)100-34	108				160
DHV(D)100-36	114.3				160
DHV(D)125-44	140.7				223
DHV(D)150-53	168.3				370


1) Kv值：密度为1吨/m³的水在通过阀的压差等于100KPa时的流量，单位为m³/h；

2) 气态介质的MOPD约高1bar。


1) Kv value: The flow rate (m³/h) of water of density 1t/m³ passing through the valve with the pressure differential of 100 KPa.

2) The MOPD of gaseous medium is about 1 bar higher than that of liquid.

外形尺寸 Overall Dimension

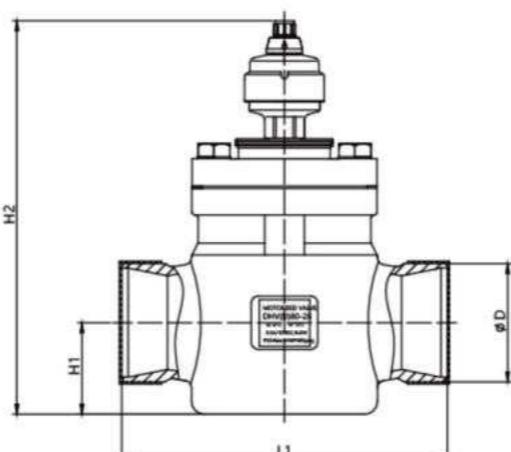

DHV(D)

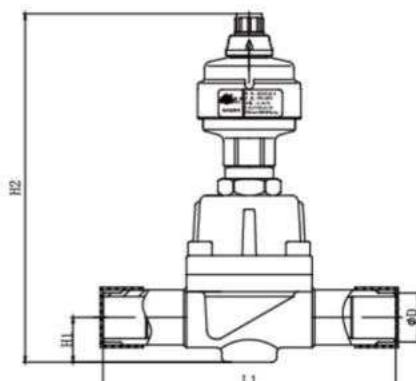

DHV(S)

型号 Model	外形尺寸 External dimension				重量(Kg) Weight (Kg)
	D	L1	H1	H2	
DHV(S)25-9	28	170	26	203.5	2.8
DHV(S)32-11	35	193	29	209.5	3.5
DHV(S)40-13	42	207	32	218	4.9
DHV(S)50-18	57	207	39	236.8	7.3
DHV(D)50-18	57	200	52.5	251.5	10
DHV(D)65-24	76	230	69	294	15.5
DHV(D)80-28	89	245	69	294	16
DHV(D)100-34	108	300	94	365	34.38
DHV(D)100-36	114.3	300	94	365	34.54
DHV(D)125-44	140.7	348	146	495	65
DHV(D)150-53	168.3	445	160	550	118

DSV (F/D) 系列电动三通调节阀

Model DSV (F/D) Motorized 3-way Regulating Valve

外形尺寸 Dimensions



DSV (D)



DSV (F)

产品描述 Product Description

<ul style="list-style-type: none"> DSV(F/D)系列电动三通调节阀用于冷冻、冷藏和空调调节装置的液体、吸气和热气管路上，热氟化霜管路上。 DSV(F/D)系列电动三通调节阀可根据应用场合选择一进二出和二进一出两种连接方式。 DSV(F/D)系列电动三通调节阀适用于系统低压差或零压差状态，不会出现不开阀或卡死现象。 DSV(F/D)系列电动三通调节阀开度可调，驱动器控制阀芯位置，实现阀门流量可调节。 DSV(F/D)系列电动三通调节阀可提供控制器，也可阀门单独供货。 	<ul style="list-style-type: none"> Model DSV (F/D) Motorized 3-way Regulating Valve can be applied in the liquid, suction and hot gas pipelines of freezing, refrigeration, air conditioning equipment and hot gas defrosting. Model DSV (F/D) Motorized 3-way Regulating Valve allows two connection methods: 1 inlet/2 outlets; 2 inlets /1 outlet. Model DSV (F/D) Motorized 3-way Regulating Valve can be applied in systems at low pressure differential or even at "0" pressure differential with out, non-open or stuck will be avoided. Model DSV (F/D) Motorized 3-way Regulating Valve can be used to control by adjust the open degree through the drive controller. Model DSV (F/D) Motorized 3-way Regulating Valve comes with drive controller, single valve is also available.
--	--

特点 Features

<ul style="list-style-type: none"> 专为工业应用场景设计； 大口径阀门，设计紧凑，重量轻； 阀盖可以任意方向安装而不影响阀门功能； 步进电机驱动，稳定性好（IP65）； 大开阀力，垃圾不易卡死； 活塞行程大，工作流量大。 	<ul style="list-style-type: none"> Specially designed for industrial application; Large diameter, compact design, light weight The bonnet can be installed in any direction without affecting the valve function Stepper motor drive, high stability (IP65) Large opening force, effectively prevent stuck Large piston stroke enlarges the working flow.
---	---


技术参数 Technical Parameters

适用制冷剂 Applicable refrigerant	HCFC, HFC (客户指定 customization available)
适用介质温度 Applicable medium working temperature	-35°C ~ +105°C
适用环境温度 Environment temperature	-35°C ~ +65°C
额定功率/电压 Rated Power/Voltage	12W/DC24V (6W/DC12V)

选型表 Model Selection

型号 Model	规 格 Size	开启压差-P(bar) -P(bar)		最大工作压力(bar) Max Working Pressure(bar)	Kv值(m³/h)
		焊接口 Weld Connection	最小Min		
DSV(F)16-6T	19	0	21	42	4
DSV (F) 25-9	28.5				10
DSV (F) 32-11	35				16
DSV (F) 40-13	42				25
DSV (D) 50-17	57				40
DSV (D) 65-24	76				70
DSV (D) 80-28	89				85


* Kv值: 密度为1吨/m³的水在通过电动阀的压差等于100KPa时的流量, 单位为m³/h;
* 气态介质的MOPD约高1bar。
* Kv value: The positive flow capacity of water with density of 1Ton/m³ at the pressure differential of 100Kpa; unit: m³/h
* The MOPD of gaseous media is about 1 bar higher

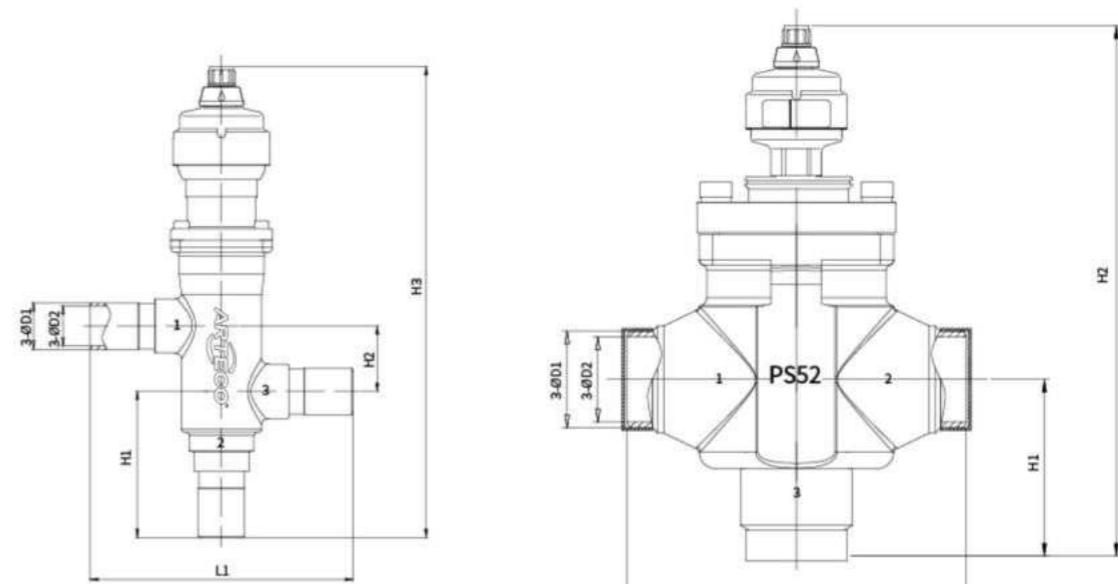

型号 Model	外形尺寸 Size						重量(Kg) Weight(Kg)
	D1	D2	L1	H1	H2	H3	
DSV(F)16-6T	23	19	125	68	24	221	1.4
DSV(F)25-9	28.5	25	163	89	40	288	3.5
DSV(F)32-11	35	30	200	118	47	334	4.1
DSV(F)40-13	42	37	200	118	47	334	4.5
DSV(D)50-17	57	50	200	104	/	312	10.2
DSV(D)65-24	76	70	230	69	/	340	18.8
DSV(D)80-28	89	82	245	69	/	341	19.2

HC-10 PID 控制器 HC-10 PID Controller

接线图 Wiring drawing

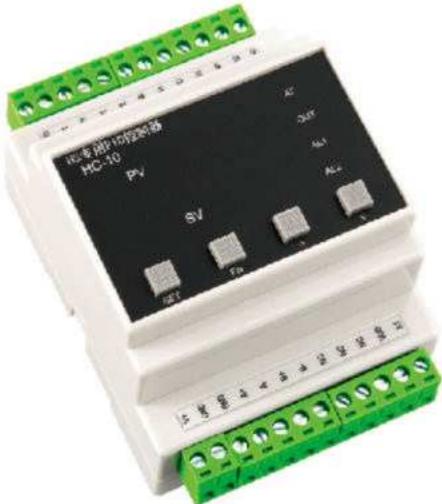

产品概述 Product Description

HC-10通用型控制器采用PID控制规律，适用于驱动单级4相步进电机和双极2相步进电机式阀门，对制冷系统的液位、压力或温度等工况的调节。


HC-10 general type controller adopts PID controlling rules, which is suitable to drive single stage 4 phase stepping motor and bipolar 2 phase stepping motor valve, and adjust the working conditions of the liquid level, pressure and temperature of the refrigerating system.

特点 Features


- 0-5V、0-10V或4-20mA标准输入信号;
- 采用PID控制算法，适用范围广控制精准;
- 具有手动、模拟量控制、PID自动控制多种控制方式;
- 带RS485标准通信口，可接主机通讯。
- 0-5V, 0-10V or 4-20mA standard input signal;
- Adopt PID control algorithm with wide application range and precise control;
- Multiple controlling method like manual, analog quantity control and PID automatic control;
- Equipped with RS485 standard communication port, which can be connected with main machine.

技术参数 Technical Parameters

电源电压 Power voltage	24VDC
输入信号 Input signal	单路0-5V (含1-5V) , 0-20mA (含4-20mA) , 0-10V (含2-10V) 三种信号 single way 0-5V (including 1-5V), 0-20mA (including 4-20mA), 0-10V (including 2-10V)
输出电压 Output voltage	12VDC, (支持4线、5线、6线制步进电机式电子膨胀阀) 12VDC, (support 4 wire, 5 wire, 6 wire system stepping motor electronic expansion valve)
RS485 通讯协议 RS485 communication protocol (ModbusRTU format)	二路报警输出触点信号 Two way alarm output contact signal

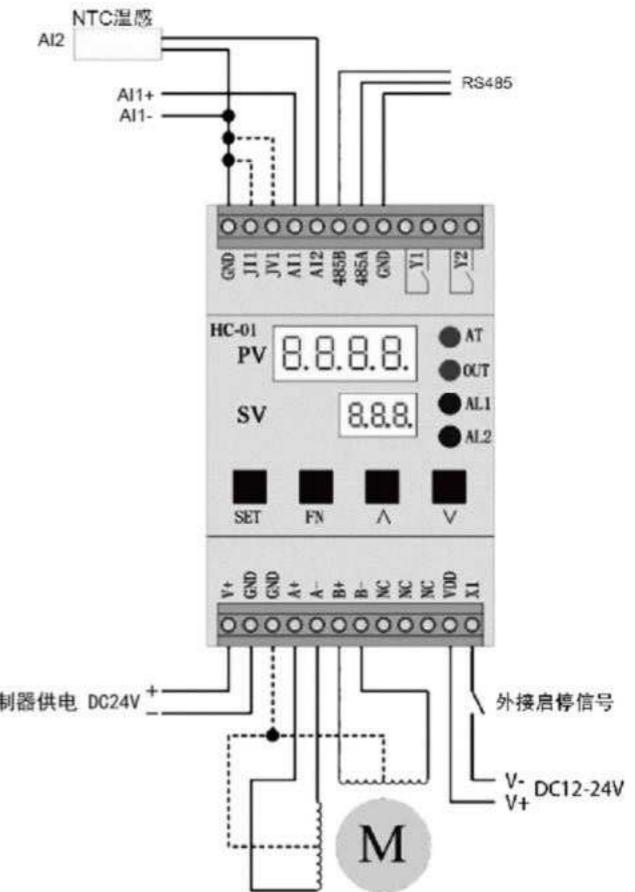

signal

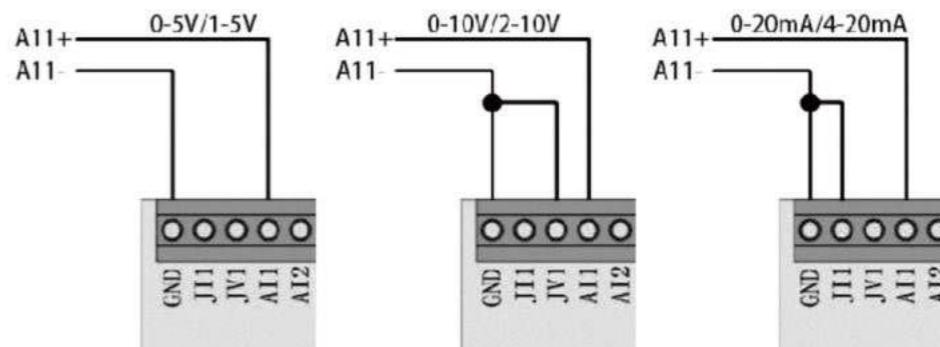

三种输入信号的接线方式
Wiring method for three types of input

HS888 控制器 HS888 Controller


接线图 Wiring drawing



HS888-T-2
(不带电源开关)



HS888-T

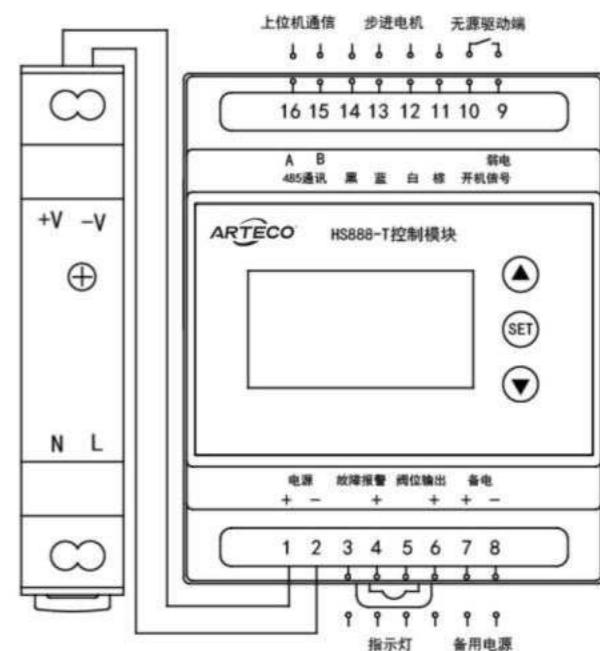

产品概述 Product Description	
电源电压	AC220V
备用电源 (选配)	DC12V/2F
使用环境温度	-20°C~+45°C
使用环境湿度	≤85%无凝露
双极驱动能力	最大输出电流1A
控制器驱动方式	无源驱动

特点 Features	
<ul style="list-style-type: none"> 专用模块：鸿森电动调节阀开关控制模块，确保系统控制精确无误； 开/关阀信号输入：无源开关量信号，用于控制器接收开阀或关阀信号。 	<ul style="list-style-type: none"> Dedicated module: Special switch Control Module for Hongsen valve, ensure the accurate system control. On/off valve signal input: Passive switch signal to receive the On/Off signal.

产品功能 Product function	
HS888控制器	HS888-2/HS888-3控制器
HS888-DC24V控制器	HS888-2-DC24V/HS888-3-DC24V控制器
· 开度可调	· 开度可调
· 脉冲数可调	· 脉冲数可调
· 断电关阀 (选配)	· 断电关阀 (选配)
· 开机断线检测	· 开机断线检测
· 故障报警	· 故障报警
HS888 controller	HS888-2/HS888-3 controller
HS888-DC24V controller	HS888-2-DC24V/HS888-3-DC24V controller
· Openness adjustable	· Openness adjustable
· Pulses adjustable	· Pulses adjustable
· Automatic close when power	· Automatic close when power
· Power disconnection detection	· Time delay adjustable at
· Error alarm	secondary opening

选型表 Model Selection				
控制器类型 Controller type	功能 Function	控制器型号 Controller Model	配用电动阀型号 Corresponding Motorized regulating valve model	工作电源 Working voltage
HS888-T	一次开启 Primary opening	HS888-20/25/32/40	DHV(S)20, DHV(S)25, DHV(F)25, DHV(F)32, DHV(F)40	AC220V
		HS888-32S	HS888-32S	
		HS888-40S	HS888-40S	
		HS888-50S	HS888-50S	
		HS888-50	HS888-50	
		HS888-65/80	HS888-65/80	
		HS888-100	HS888-100	
	二次开启 Secondary opening	HS888-125	HS888-125	
		HS888-2-20/25/32/40	DHV(S)20, DHV(S)25, DHV(F)25, DHV(F)32, DHV(F)40	
		HS888-2-32S	DHV(S)32	
HS888-T-2 (No Power Switch)	二次开启 Secondary opening	HS888-2-40S	DHV(S)40	DC12V
		HS888-2-50S	DHV(S)50	
		HS888-2-50	DHV(D)50	
		HS888-2-65/80	DHV(D)65, DHV(D)80	
		HS888-2-100	DHV(D)100	
		HS888-2-125	DHV(D)125	
		HS888-3-16	DSV(F)16	
	用于电动三通阀 Used for Motorized 3-way regulating valve	HS888-3-25	DSV(F)25	DC24V
		HS888-3-32/40	DSV(F)32, DSV(F)40	
		HS888-3-50	DSV(D)50	
		HS888-3-65/80	DSV(D)65, DSV(D)80	
	一次开启 Primary opening	HS888-20/25/32/40	DHV(S)20, DHV(S)25, DHV(F)25, DHV(F)32, DHV(F)40	DC24V
		HS888-32S	DHV(S)32	
		HS888-40S	DHV(S)40	
		HS888-50S	DHV(S)50	
		HS888-50	DHV(D)50	
		HS888-65/80	DHV(D)65, DHV(D)80	
		HS888-100	DHV(D)100	
	二次开启 Secondary opening	HS888-125	DHV(D)125	
		HS888-2-20/25/32/40	DHV(S)20, DHV(S)25, DHV(F)25, DHV(F)32, DHV(F)40	DC12V
		HS888-32S	DHV(S)32	
	用于电动三通阀 Used for Motorized 3-way regulating valve	HS888-40S	DHV(S)40	
		HS888-50S	DHV(S)50	
		HS888-50	DHV(D)50	
	二次开启 Secondary opening	HS888-65/80	DHV(D)65, DHV(D)80	DC24V
		HS888-100	DHV(D)100	
		HS888-125	DHV(D)125	
	用于电动三通阀 Used for Motorized 3-way regulating valve	HS888-3-16	DSV(F)16	DC24V
		HS888-3-25	DSV(F)25	
		HS888-3-32/40	DSV(F)32, DSV(F)40	
		HS888-3-50	DSV(D)50	
		HS888-3-65/80	DSV(D)65, DSV(D)80	

电磁阀系列

SOLENOID VALVE Series

REFRIGERATION A/C SYSTEM ACCESSORIES

专利线圈 低温升、大功率、防水性能好。

应用新材料，耐高温性能更好。

采用新工艺，阀口密封优良开启压力更小。

The patent coil has the advantages of low temperature rise, high power
and good waterproof performance.

The new material has better heat resistance performance.

With new technology, the valve opening is excellent and the opening
pressure is smaller.



HVD型活塞式电磁阀

Model HVD Piston Type Solenoid Valve



产品概述 Product Description

- HVD型活塞式电磁阀是二次开启式电磁阀，适用于单向流动。
- HVD型活塞式电磁阀用于冷冻、冷藏和空调调节装置的液体、吸气和热气管路上。
- HVD型活塞式电磁阀可提供多种电压的线圈，而阀体是通用的。
- HVD型活塞式电磁阀可提供整体供货，也可分体供货，即阀体和线圈分开单独供货。

- Model HVD piston type solenoid valve is a twice open-type solenoid valve to be suitable to one-way flow.
- Model HVD piston type solenoid valve is used on the liquid, air suction and hot vapor pipes of the refrigeration, cold storage and air conditioning facilities.
- The coil of varies voltages is available for Model HVD piston type solenoid valve with a universal valve body.
- Model HVD piston type solenoid valve could be supplied in whole or in split, that means valve body and coil could be supplied separately.

特点 Features

- 专利线圈，防水性能好 (IP65)。
- 应用新材料，耐高低温性能好。
- 24W的大功率电磁线圈，开阀能力大。
- 活塞行程大，工作流量大。
- 多种交流和直流电磁线圈可供选择。
- 焊接连接可达1-5/8in。

- The proprietary coil has perfect waterproof performance (IP65).
- Using new material, it has performance in high and low temperature application.
- The 24W high-power solenoid coil has high capability to open the valve.
- The high flow rate is assured by a big piston stroke.
- Various AC and DC solenoid coils are available for choice.
- 1-5/8 inch is the maximum welded connection size.

技术参数 Technical Parameters

适用制冷剂 Applicable Refrigerants	HCFC or HFC(客户指定 Customer specified)
适用介质温度 Applicable Medium Temperature	-30°C~+105°C
线圈的适用环境温度 Application Ambient Temperature of Solenoid	-40°C~+65°C
线圈的标准电压 Standard Voltage of Solenoid	AC 380V, AC 220V/50Hz(也可按客户指定做 Customer design is available)
线圈的允许电压波动 Allowable Voltage Fluctuation for Solenoid	+10%~-15%
线圈的连接 Connection of Solenoid	3线插入式标准连接器 Standard 3-wire insert connector

选型表 Model Selection

型号 Model	规格 Size 焊接口 Weld Connection	开启差值ΔP(bar)			最大工作压力(bar) Max Working Pressure(bar)	Kv值 Kv(m³/h)
		最小Min	最大工作压力差MOPD	液体 Liquid MOP		
HVD8-3T	3/8ODF	0.05	31		45	0.8
HVD10-4T	1/2ODF	0.05	31		45	1.4
HVD10-5T	5/8ODF	0.05	31		45	1.9
HVD15-6T	3/4ODF	0.05	31		45	2.6
HVD15-7T	7/8 ODF	0.05	31		45	2.8
HVD25-9T	1-1/8ODF	0.2	31		45	10
HVD32-11T	1-3/8ODF	0.2	31		45	16
HVD40-13T	1-5/8ODF	0.2	31		45	25

1) Kv值: 密度为1吨/m³的水在通过电磁阀的压差等于100KPa时的流量，单位为m³/h;

2) 气态介质的MOPD约高1bar。

1) Kv value: The flow rate (m³/h) of water of density 1t/m³ passing through the solenoid valve with the pressure differential of 100 KPa;

2) The MOPD of gaseous medium is about 1 bar higher than that of liquid.

型号 Model	名义制冷量 KW Nominal Refrigerating Capacity kW											
	液体 Liquid				吸气 Air Suction				热蒸汽 Hot Vapor			
	R22/R407C	R134a	R404A/R507	R410A	R22/R407C	R134a	R404A/R507	R410A	R22/R407C	R134a	R404A/R507	R410A
HVD8-3T	16.10	14.80	11.20	16.08	1.80	1.30	1.60	2.32	7.40	5.90	6.00	11.18
HVD10-4T	28.18	25.90	19.60	28.14	3.15	2.28	2.80	4.06	12.95	10.33	10.50	19.57
HVD10-5T	38.24	35.15	26.60	38.19	4.28	3.09	3.80	5.51	17.58	14.01	14.25	26.55
HVD15-6T	52.33	48.10	36.40	52.26	5.85	4.23	5.20	7.54	24.05	19.18	19.50	36.34
HVD15-7T	56.35	51.80	39.20	56.28	6.30	4.55	5.60	8.12	25.90	20.65	21.00	39.13
HVD25-9T	201.25	185.00	140.00	201.00	22.50	16.25	20.00	29.00	92.50	73.75	75.00	139.75
HVD32-11T	322.00	296.00	224.00	321.60	36.00	26.00	32.00	46.40	148.00	118.00	120.00	223.60
HVD40-13T	503.13	462.50	350.00	502.50	56.25	40.63	50.00	72.50	231.25	184.38	187.50	349.38

液体和吸气名义制冷量的工况条件为

The working condition the nominal refrigerating capacity of liquid and air suction is as follows:

蒸发温度 $t_c = -10^\circ\text{C}$ Evaporation Temperature: $t_e = -10^\circ\text{C}$;

阀前液体温度 $t_1 = +25^\circ\text{C}$ Liquid Temperature before Valve: $t_1 = +25^\circ\text{C}$;

经过电磁阀的压力降 $\Delta P = 15\text{KPa}$ Pressure Drop after Solenoid Valve: $\Delta P = 15\text{KPa}$

热气名义制冷量的工况条件为

The working condition the nominal refrigerating capacity of hot vapor is as follows:

冷凝温度 $t_c = +40^\circ\text{C}$ Condensation Temperature: $t_c = +40^\circ\text{C}$;


经过电磁阀的压力降 $\Delta P = 0.8\text{bar}$ Pressure Drop after Solenoid Valve: $\Delta P = 0.8\text{bar}$;

热气温度 $t_h = +65^\circ\text{C}$ Hot Vapor Temperature: $t_h = +65^\circ\text{C}$;

液体制冷剂过冷度 $\Delta t_{sub} = 4\text{K}$ Liquid Refrigerant Overcooling: $\Delta t_{sub} = 4\text{K}$


结构 Structure

- 1.电磁线圈 solenoid coil
- 2.芯铁部件 core iron
- 3.阀座部件 valve seat
- 4.阀盖 bonnet
- 5.复位弹簧 reset spring
- 6.活塞部件 piston
- 7.活塞芯 piston core
- 8.密封垫 PTFE gasket
- 9.阀体 valve body
- 10.防尘帽 dust cap
- 11.接管 pipe
- 12.O形圈 O-ring
- 13.阀芯 value element
- 14.阀芯垫片 value element gasket
- 15.密封环 seal ring

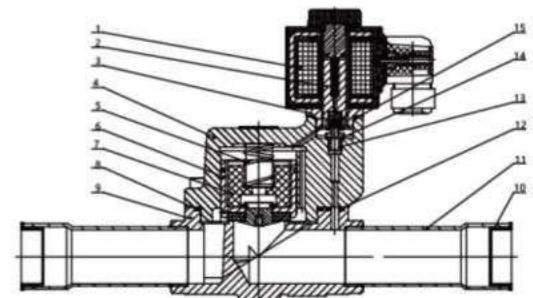

外形尺寸 Overall Dimension

型号 Model	外形尺寸 Overall Dimension						
	A	B	D	L1	L2	H1	H2
HVD25-9T	103	85	Φ28.7	20	246.5	26.5	139
HVD32-11T	110	85	Φ35.2	25	281.0	28	145
HVD40-13T	119	85	Φ41.5	29	316.0	32	150

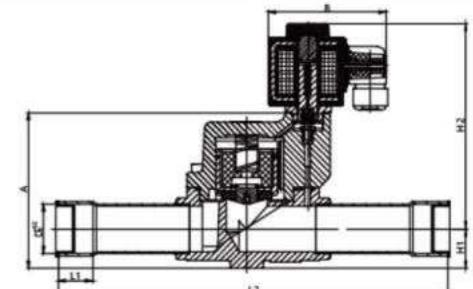

HVP型活塞式电磁阀

Model HVP Piston Type Solenoid Valve



产品概述 Product Description

- HVP型活塞式电磁阀是二次开启式电磁阀，适用于单向流动。
- HVP型活塞式电磁阀用于冷冻、冷藏和空调调节装置的液体、吸气和热气管路上。
- HVP型活塞式电磁阀可提供多种电压的线圈，而阀体是通用的。
- HVP型活塞式电磁阀可提供整体供货，也可分体供货，即阀体和线圈分开单独供货。

- Model HVP piston type solenoid valve is a twice open-type solenoid valve to be suitable to one-way flow.
- Model HVP piston type solenoid valve is used on the liquid, air suction and not vapor pipes of the refrigeration, cold storage and air conditioning facilities.
- The coil of varies voltages is available for Model HVP piston type solenoid valve with a universal valve body.
- Model HVP piston type solenoid valve could be supplied in whole or in split, that means valve body and coil could be supplied separately.

特点 Features

- 专利线圈，防水性能好 (IP65)。
- 应用新材料，耐高低温性能好。
- 24W的大功率电磁线圈，开阀能力大。
- 活塞行程大，工作流量大。
- 多种交流和直流电磁线圈可供选择。
- 焊接连接可达2-1/8in。

- The proprietary coil has perfect waterproof performance (IP65).
- Using new material, it has performance in high and low temperature application.
- The 24W high-power solenoid coil has high capability to open the valve.
- The high flow rate is assured by a big piston stroke.
- Various AC and DC solenoid coils are available for choice.
- 2-1/8 inch is the maximum welded connection size.

技术参数 Technical Parameters

适用制冷剂 Applicable Refrigerants	HCFC or HFC(客户指定 Customer specified)
适用介质温度 Applicable Medium Temperature	-30°C~+105°C
线圈的适用环境温度 Application Ambient Temperature of Solenoid	-40°C~+65°C
线圈的标准电压 Standard Voltage of Solenoid	AC 380V, AC 220V/50Hz(也可按客户指定做 Customer design is available)
线圈的允许电压波动 Allowable Voltage Fluctuation for Solenoid	+10%~-15%
线圈的连接 Connection of Solenoid	3线插入式标准连接器 Standard 3-wire insert connector

选型表 Model Selection

型号 Model	规格Size 焊接口 Weld Connection	开启差值ΔP(bar)		最大工作压力(bar) Max Working Pressure(bar)	Kv值 Kv(m³/h)
		最小Min	最大工作压力差MOPD 液体 LiquidMOP		
HVP25	1-1/8 ODF	0.2	31	45	10
HVP32	1-3/8 ODF	0.2	31	45	16
HVP40	1-5/8 ODF	0.2	31	45	25
HVP54	2-1/8 ODF	0.2	31	45	28

1) Kv值: 密度为1吨/m³的水在通过电磁阀的压差等于100KPa时的流量, 单位为m³/h;

2) 气态介质的MOPD约高1bar.

1) Kv value: The flow rate (m³/h) of water of density 1t/m³ passing through the solenoid valve with the pressure differential of 100 KPa.

2) The MOPD of gaseous medium is about 1 bar higher than that of liquid.

型号 Model	名义制冷量 KW Nominal Refrigerating Capacity kW											
	液体 Liquid				吸气 Air Suction				热蒸气 Hot Vapor			
	R22/R407C	R134a	R404A/R507	R410A	R22/R407C	R134a	R404A/R507	R410A	R22/R407C	R134a	R404A/R507	R410A
HVP25	201.25	185.00	140.00	201.00	22.50	16.25	20.00	29.00	92.50	73.75	75.00	139.75
HVP32	322.00	296.00	224.00	321.60	36.00	26.00	32.00	46.40	148.00	118.00	120.00	223.60
HVP40	503.13	462.50	350.00	502.50	56.25	40.63	50.00	72.50	231.25	184.38	187.50	349.38
HVP54	563.50	518.00	392.00	562.80	63.00	45.50	56.00	81.20	259.00	206.50	210.00	391.30

液体和吸气名义制冷量的工况条件为

The working condition the nominal refrigerating capacity of liquid and air suction is as follows:

蒸发温度 $t_c = -10^\circ\text{C}$ Evaporation Temperature: $t_e = -10^\circ\text{C}$;

阀前液体温度 $t_1 = +25^\circ\text{C}$ Liquid Temperature before Valve: $t_1 = +25^\circ\text{C}$;

经过电磁阀的压力降 $\Delta P = 15\text{KPa}$ Pressure Drop after Solenoid Valve: $\Delta P = 15\text{KPa}$

热气名义制冷量的工况条件为

The working condition the nominal refrigerating capacity of hot vapor is as follows:

冷凝温度 $t_c = +40^\circ\text{C}$ Condensation Temperature: $t_c = +40^\circ\text{C}$;


经过电磁阀的压力降 $\Delta P = 0.8\text{bar}$ Pressure Drop after Solenoid Valve: $\Delta P = 0.8\text{bar}$;

热气温度 $t_h = +65^\circ\text{C}$ Hot Vapor Temperature: $t_h = +65^\circ\text{C}$;

液体制冷剂过冷度 $\Delta t_{sub} = 4\text{K}$ Liquid Refrigerant Overcooling: $\Delta t_{sub} = 4\text{K}$


结构 Structure

- | | |
|-------------------------|-----------------------------------|
| 1. 阀体 valve body | 11. 电磁线圈 (24W) solenoid coil(24W) |
| 2. 活塞部件 piston | 12. 芯铁部件 core iron |
| 3. 弹簧 spring | 13. 复位弹簧 reset spring |
| 4. 活塞芯 piston core | 14. 阀座部件 valve seat |
| 5. 密封座 sealing seat | 15. 密封环 seal ring |
| 6. 法兰组件 flange assembly | 16. 阀芯 value element |
| 7. 防尘帽 dust cap | 17. 阀芯垫片 value element gasket |
| 8. 定位销 dowel pin | 18. 过滤网组件 filter assembly |
| 9. O形圈 O-ring | 19. 挡圈 retainer ring |
| 10. 密封垫 PTFE gasket | 20. 螺钉 screw |

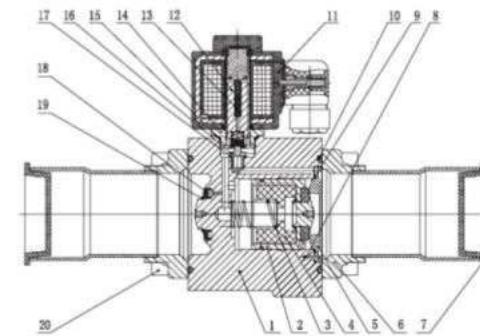

外形尺寸 Overall Dimension

型号 Model	外形尺寸 Overall Dimension						
	A	B	D	L1	L2	H1	H2
HVP25	100	85	Φ28.7	20	281.5	51.5	111
HVP32	100	85	Φ35.2	25	281.5	51.5	111
HVP40	100	85	Φ41.5	29	281.5	51.5	111
HVP54	100	85	Φ54.2	34	281.5	51.5	111

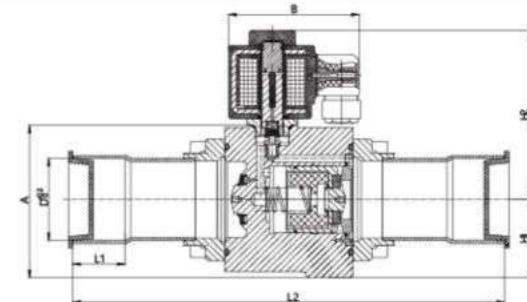

HV型电磁阀

Model HV solenoid valve



产品概述 Product Description

<ul style="list-style-type: none"> HV型电磁阀是一次开启式或二次开启式电磁阀，适用于单向流动。 HV型电磁阀用于冷冻、冷藏和空调调节装置的液体、吸气和热气管路上。 HV型电磁阀的阀座与密封处具有很好的密封性。 HV型电磁阀可提供多种电压的线圈。 HV型电磁阀可提供整体供货，也可分体供货，即阀体和线圈分开单独供货。 	<ul style="list-style-type: none"> Model HV solenoid valve is a one-step on/off or two-step on/off solenoid valve, which is applicable to one-way flow. Model HV solenoid valve is used on the piping of liquid, suction gas or hot air on the freezing, cold storage and air conditioner units. The valve seat and seals of Model HV solenoid valve have excellent sealing performance. Model HV solenoid valve could be supplied with coils of varied voltage. Model HV solenoid valve could be supplied in assembly or in separate components, that is, the valve body and the coil could be supplied separately.
--	---

特点 Features

<ul style="list-style-type: none"> 可提供常闭 (NC) 型阀。 可提供多种接口尺寸。 多种电源的电磁线圈可选择。 功率9W的电磁线圈，最大工作压差 (MOPD) 可达3.1MPa。 夹卡式电磁线圈只需一把螺丝刀可简单地拆卸。 可用于冷冻、冷藏和空调调节装置的各种场合。 使用寿命长的密封线圈，可在恶劣环境条件下使用。 	<ul style="list-style-type: none"> Only NC type solenoid valve is available. Coils of various power supply are available for choice. For 9W solenoid, MOPD is up to 3.1 MPa. For clamping type solenoid valve, it is simple and just need one screwdriver in installation. It is suitable to various application in freezing, cold storage and air conditioner units. The sealed coil has a long service life and could be used in adverse circumstances. Certification • ISO 9001 • QS (XK-015-00246) • CE UL
---	---

技术参数 Technical Parameters

适用制冷剂 Applicable Refrigerants	HFC、HFC及相应介质粘度≤2°E 润滑机油HCFC、HFC and related medium viscosity ≤2°E lubricant oil
适用介质温度 Applicable Medium Temperature	-30°C~+105°C
线圈的适用环境温度 Application Ambient Temperature of Solenoid	-40°C~+65°C
线圈的标准电压 Standard Voltage of Solenoid	AC380V、220V、110V、24V/50、60Hz、DC12V
线圈的允许电压波动 Allowable Voltage Fluctuation for Solenoid	+10%~-15%
线圈的连接 Connection of Solenoid	3线插入式标准连接器 Standard 3-wire insert connector

选型表 Model Selection

结构 Structure	型号 Model	接口 Connection				最大工作压差△P(bar) 液体 Liquid MOPD 气体 Gas MOP	最大工作压力(bar) Max Working Pressure(bar)	Kv值(m³/h)
		规格 Spec	型式 Type	最小 Min.	最大 Max.			
直接开启式 Direct Operated	HV3-2	1/4	螺口 SAE	0.0	0.05	31 (常闭 close)	45	0.2
	HV3-2T		焊口 ODF					
	HV3-3		螺口 SAE					
	HV3-3T		焊口 ODF					
膜片二次开启式 Servo-Operated	HV8M3	3/8	螺口 SAE	0.05	0.2	2.6	2.2	0.8
	HV8M3T		焊口 ODF					
	HV8M4		螺口 SAE					
	HV8M4T		焊口 ODF					
	HV10M4	1/2	螺口 SAE	0.05	0.2	2.6	2.2	0.27
	HV10M4T		焊口 ODF					
	HV10M5		螺口 SAE					
	HV10M5T		焊口 ODF					
	HV15M5	5/8	螺口 SAE	0.2	0.2	5.7	5.7	10
	HV15M5T		焊口 ODF					
	HV15M6		螺口 SAE					
	HV15M6T		焊口 ODF					
	HV20M7T	3/4	螺口 SAE	0.2	0.2	1.1/8	1.1/8	0.2
	HV25M9T	7/8	焊口 ODF					

1) Kv值: 密度为1吨/m³的水在通过电磁阀的压差等于100KPa时的流量, 单位为m³/h;

2) 气态介质的MOPD约高1bar.

1) Kv value: The flow rate (m³/h) of water of density 1t/m³ passing through the solenoid valve with the pressure differential of 100 KPa.

2) The MOPD of gaseous medium is about 1 bar higher than that of liquid.

型号 Model	名义制冷量 KW Nominal Refrigerating Capacity kW											
	液体 Liquid				吸气 Air Suction				热蒸汽 Hot Vapor			
	R22/R407C	R134a	R404A/R507	R410A	R22/R407C	R134a	R404A/R507	R410A	R22/R407C	R134a	R404A/R507	R410A
HV3-3T	4.03	3.70	2.80	4.02	0.45	0.33	0.40	0.58	1.85	1.48	1.50	2.80
HV8M3T	16.10	14.80	11.20	16.08	1.80	1.30	1.60	2.32	7.40	5.90	6.00	11.18
HV10M4T	38.24	35.15	26.60	38.19	4.28	3.09	3.80	5.51	17.58	14.01	14.25	26.55
HV15M5T	52.33	48.10	36.40	52.26	5.85	4.23	5.20	7.54	24.05	19.18	19.50	36.34
HV15M7T	100.63	92.50	70.00	100.50	11.25	8.13	10.00	14.50	46.25	36.88	37.50	69.88
HV20M7T	201.25	185.00	140.00	201.00	22.50	16.25	20.00	29.00	92.50	73.75	75.00	139.75
HV25M9T	201.25	185.00	140.00	201.00	22.50	16.25	20.00	29.00	92.50	73.75	75.00	139.75

液体和吸气名义制冷量的工况条件为

The working condition the nominal refrigerating capacity of liquid and air suction is as follows:

蒸发温度 te=-10°C Evaporation Temperature: te = -10°C;

阀前液体温度 t1=+25°C Liquid Temperature before Valve: t1 = +25°C;

经过电磁阀的压力降 ΔP=15KPa Pressure Drop after Solenoid Valve: ΔP = 15KPa

热气名义制冷量的工况条件为


The working condition the nominal refrigerating capacity of hot vapor is as follows:

冷凝温度 tc=+40°C Condensation Temperature: tc = +40°C;

经过电磁阀的压力降 ΔP=0.8bar Pressure Drop after Solenoid Valve: ΔP = 0.8bar;



热气温度 th=+65°C Hot Vapor Temperature: th = +65°C;

液体制冷剂过冷度 Δtsub=4K Liquid Refrigerant Overcooling: Δtsub = 4K

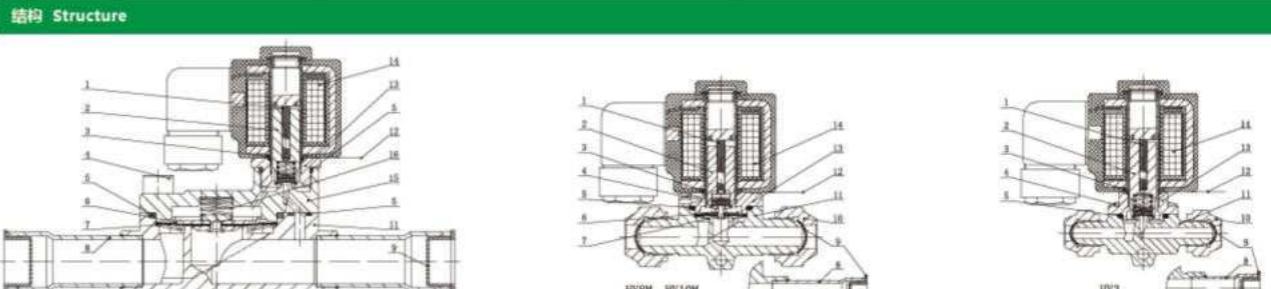

1.回复弹簧 recovery spring 2.芯铁部件 iron core (modified PTFE密封) (modified PTFE sealing) 3.耐油橡胶oil-resistance rubber 4.紧固螺钉 (4个) fastening screw(4 pieces) 5.密封垫 PTFE gasket 6.阀芯部件 valve core (移动式) (modified PTFE复合膜片) (mobile) (modified PTFE composite diaphragm) 7.挡片 flapper 8.铜接管 copper tube 9.防尘帽 dust cap 10.接管螺母 connection tube nut 11.阀体部件 valve body 12.阀盖部件 valve cover 13.电磁线圈 (9W) solenoid coils(9W) 14.阀盖 valve cover 15.大回复弹簧 big recovery spring

外形尺寸 Overall Dimension

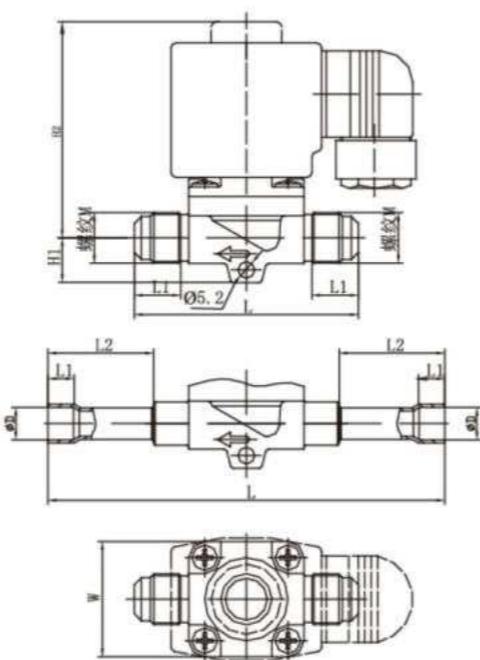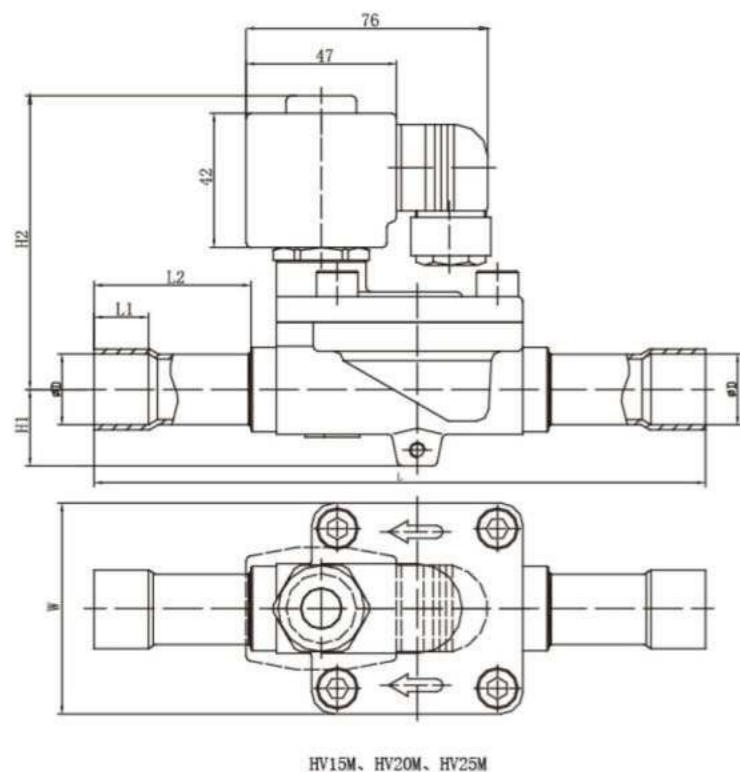

SV型电磁阀 Model SV Solenoid Valve



产品概述 Product Description

- SV型电磁阀是一次开启式或二次开启式电磁阀，适用于单向流动。
- SV型电磁阀用于冷冻、冷藏和空调装置的液体、吸气和热气管路上。
- SV型电磁阀的阀座与密封处具有很好的密封性。
- SV型电磁阀可提供多种电压的线圈，而阀体是通用的。
- SV型电磁阀可提供整体供货，也可分体供货，即阀体和线圈分开单独供货。
- Model SV solenoid valve is a once open-type or twice open-type solenoid valve to be suitable to one-way flow.
- Model SV solenoid valve is used on the liquid, air suction and hot vapor pipes of the refrigeration, cold storage and air conditioning facilities.
- Model SV solenoid valve has perfect sealing on its valve seat and sealing part.
- The coil of varies voltages is available for Model SV solenoid valve with a universal valve body.
- Model SV solenoid valve could be supplied in whole or in split, that means the valve body and coil could be supplied separately.

型号 Model	外形尺寸 Overall Dimension							
	H1	H2	W	L	L1	L2	ØD	螺纹 M
HV3-2	14	66	30	78	14.5	—	—	7/16-20UNF
HV3-2T	14	66	30	102	7	27	6.5	—
HV3-3	14	66	30	78	14.5	—	—	5/8-18UNF
HV3-3T	14	66	30	114	8	35	10.1	—
HV8M3	14	67	36	96	16	—	—	5/8-18UNF
HV8M3T	14	67	36	124	8	33	10.1	—
HV8M4	14	67	36	98	17	—	—	3/4-16UNF
HV8M4T	14	67	36	130	10	36	12.8	—
HV10M4	15	77	45	103	18	—	—	3/4-16UNF
HV10M4T	15	77	45	138	10	36	12.8	—
HV10M5	15	77	45	112	20	—	—	7/8-14UNF
HV10M5T	15	77	45	156	14	42	16.1	—
HV15M5	18	88	52	133	19.5	—	—	7/8-14UNF
HV15M5T	18	88	52	165	14	43	16.1	—
HV15M6	18	88	52	133	21	—	—	1-1/16-14UNS
HV15M6T	18	88	52	172	16	46	19.2	—
HV20M7T	24	92	66	191	17	49	22.3	—
HV25M9T	26.5	96	73	246	22	73	28.7	—

特点 Features

- 线圈为专利产品，整体密封设计；可有效防水，使用寿命长（IP65）。
- 线圈在电压波动大的状况下也能正常工作。
- 多种交流直流电磁线圈可供选择。
- 夹卡式电磁线圈拆卸安装方便。
- 可用于冷冻、冷藏和空调装置的各种压缩机上。
- The proprietary coil is an entirely sealed design with an effective waterproof performance and a long service life(IP65).
- The solenoidcoil could be operated properly even under unstable voltage.
- Various AC and DC solenoid coils are available for choice.
- Clip type solenoid coil is convenient in assembly and disassembly.
- It is applicable to various compressors in the refrigeration,cold storage and air conditioning facilities.

技术参数 Technical Parameters

适用制冷剂 Applicable Refrigerants	HCFC、HFC 及相应介质粘度 $\leq 2^{\circ} E$ 润滑机油 HCFC、HFC and related medium viscosity $\leq 2^{\circ} E$ lubricant oil
适用介质温度 Applicable Medium Temperature	-30°C~+105°C
线圈的适用环境温度 Application Ambient Temperature of Solenoid	-40°C~+65°C
线圈的标准电压 Standard Voltage of Solenoid	AC380V, 220V, 110V, 24V/50, 60Hz, DC12V
线圈的允许电压波动 Allowable Voltage Fluctuation for Solenoid	+10%~-15%
线圈的连接 Connection of Solenoid	3线插入式标准连接器 Standard 3-wire insert connector

选型表 Model Selection						
结构 Structure	型号 Model	接口 Connection		开启压差·P(bar)		Kv值(m³/h)
		规格 Spec	型式 Type	最小 Minimum	最大工作压力差 MOPD 液体 LiquidMOP	
直接开启式 Direct Operated	SV20-2	1/4	螺口 SAE	0.0	31	0.2
	SV28-2		焊口 ODF			
膜片二次开启式 Servo-Operated	SV20-3	3/8	螺口 SAE		45	0.27
	SV28-3		焊口 ODF			
膜片二次开启式 Servo-Operated	SV64-3	1/2	螺口 SAE	0.05	31	0.8
	SV68-3		焊口 ODF			
	SV64-4	5/8	螺口 SAE	0.05	45	2.6
	SV68-4		焊口 ODF			
膜片二次开启式 Servo-Operated	SV70-5	3/4	螺口 SAE	0.2	31	5.7
	SV78-5		焊口 ODF			
	SV70-6	7/8	螺口 SAE	0.2	45	5.7
	SV78-6		焊口 ODF			
	SV98-7	7/8	焊口 ODF	0.2		

1) Kv值: 密度为1吨/m³的水在通过电磁阀的压差等于100KPa时的流量, 单位为m³/h;

2) 气态介质的MOPD约高1bar.

1) Kv value: When the pressure differential is 100 KPa, the flowrate at m³/h of water in density 1 t/m³ flows the solenoid valve.

2) The MOPD of gaseous medium is about 1 bar higher than that of liquid.

型号 Model	名义制冷量 KW Nominal Refrigerating Capacity kW											
	液体 Liquid				吸气 Air Suction				热蒸气 Hot Vapor			
	R22/R407C	R134a	R404A/R507	R410A	R22/R407C	R134a	R404A/R507	R410A	R22/R407C	R134a	R404A/R507	R410A
SV20	4.03	3.70	2.80	4.02	0.45	0.33	0.40	0.58	1.85	1.48	1.50	2.80
SV28	4.03	3.70	2.80	4.02	0.45	0.33	0.40	0.58	1.85	1.48	1.50	2.80
SV64	16.10	14.80	11.20	16.08	1.80	1.30	1.60	2.32	7.40	5.90	6.00	11.18
SV70	52.33	48.10	36.40	52.26	5.85	4.23	5.20	7.54	24.05	19.18	19.50	36.34
SV78	52.33	48.10	36.40	52.26	5.85	4.23	5.20	7.54	24.05	19.18	19.50	36.34
SV98	114.71	105.45	79.80	114.57	12.83	9.26	11.40	16.53	52.73	42.04	42.75	79.66

液体和吸气名义制冷量的工况条件为:

- 蒸发温度 te=+40°C
- 阀前液体温度 t1=+25°C
- 经过电磁阀的压力降 ΔP=15KPa

The working condition the nominal refrigerating capacity of liquid and air suction is as follows:

- Evaporation Temperature: te = -10°C;
- Liquid Temperature before Valve: t1 = +25°C;
- Pressure Drop after Solenoid Valve: ΔP = 15KPa


热气名义制冷量的工况条件为:

- 冷凝温度 tc=+40°C
- 经过电磁阀的压力降 ΔP=80KPa
- 热气温度 th=+65°C
- 液体制冷剂过冷度 Δtsub=4K

The working condition the nominal refrigerating capacity of hot vapor is as follows:

- Condensation Temperature: tc = +40°C;
- Pressure Drop after Solenoid Valve: ΔP = 80KPa;
- Hot Vapor Temperature: th = +65°C;
- Liquid Refrigerant Overcooling: Δtsub = 4K

型号 Model	外形尺寸 Overall Dimension					
	A	H	L	L1	ΦD	M
SV20-2	70	65	58	—	—	7/16-20UNF
SV28-2	70	65	90	7	6.5	—
SV20-3	70	65	64	—	—	5/8-18UNF
SV28-3	70	65	104	8	10.1	—
SV64-3	70	72	81	—	—	5/8-18UNF
SV68-3	70	72	108	8	10.1	—
SV64-4	70	72	85	—	—	3/4-16UNF
SV68-4	70	72	114	10	12.8	—
SV70-5	70	75	104	—	—	7/8-14UNF
SV78-5	70	75	152	14	16.1	—
SV70-6	70	75	104	—	—	1-1/16-14UNS
SV78-6	70	75	158	16	19.2	—
SV98-7	70	78	180	17	22.3	—

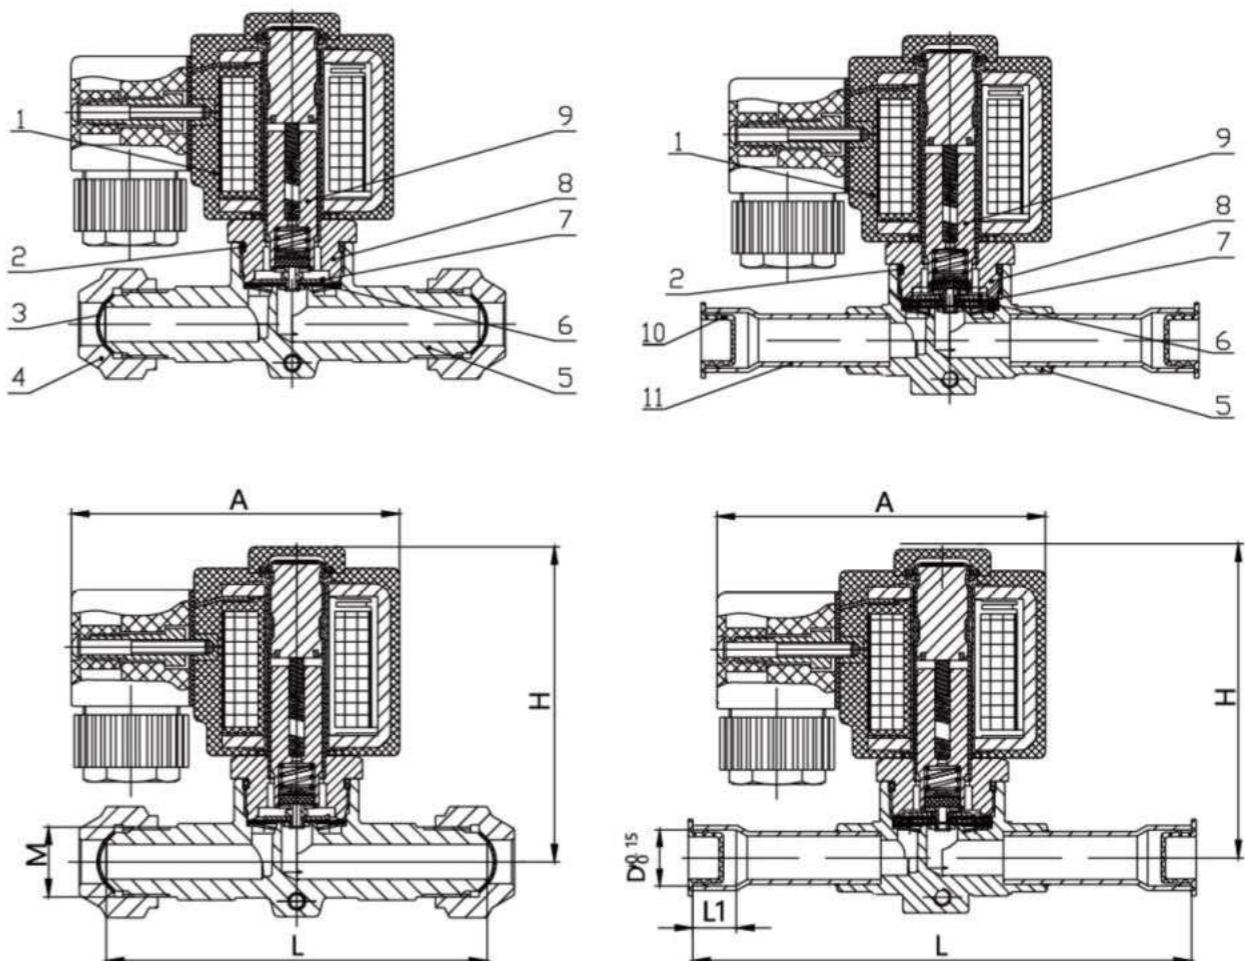

1.电磁线圈 solenoid coil 2.O形圈 O-Ring 3.封帽 sealing cap 4.纳子 nut 5.阀体 valve body
6.挡片 plate 7.阀芯部件 valve element 8.阀座部件 valve seat 9.芯铁部件 core cap 10.防尘帽 dust cap 11.接管 pipe

10系列电磁阀 Model 10 Solenoid Valve



产品概述 Product Description

<ul style="list-style-type: none"> 10型电磁阀是一次开启式或二次开启式电磁阀，适用于单向流动。 10型电磁阀用于冷冻、冷藏和空调调节装置的液体、吸气和热气管路上。 10型电磁阀的阀座与密封处具有很好的密封性。 10型电磁阀可提供多种电压的线圈，而阀体是通用的。 10型电磁阀可提供整体供货，也可分体供货，即阀体和线圈分开单独供货。 	<ul style="list-style-type: none"> Model 10 solenoid valve is a once open-type or twice open-type solenoid valve to be suitable to one-way flow. Model 10 solenoid valve is used on the liquid, air suction and hot vapor pipes of the refrigeration, cold storage and air conditioning facilities. Model 10 solenoid valve has perfect sealing on its valve seat and sealing part. The coil of varies voltages is available for Model SV solenoid valve with a universal valve body. Model 10 solenoid valve could be supplied in whole or in split, that means the valve body and coil could be supplied separately.
--	---

特点 Features

<ul style="list-style-type: none"> 可提供常闭 (NC) 型阀。 可提供多种接口尺寸。 多种电源的电磁线圈可选择。 功率8W的电磁线圈，最大工作压差 (MOPD) 可达2.5MPa。 夹卡式电磁线圈只需一把螺丝刀可简单地拆卸。 可用于冷冻、冷藏和空调调节装置的各种场合。 使用寿命长的密封线圈，可在恶劣环境条件下使用。 	<ul style="list-style-type: none"> Only NC type solenoid valve is available. Coils of various power supply are available for choice. For 8W solenoid,MOPD is up to 2.5 MPa. For clamping type solenoid valve,it is simple and just need one screwdriver in installation. It is suitable to various application in freezing,cold storage and air conditioner units. The sealed coil has a long service life and could be used in adverse circumstances.
---	--

技术参数 Technical Parameters

适用制冷剂 Applicable Refrigerants	HCFC, HFC 及相应介质粘度 $\leq 2^{\circ} E$ 润滑机油 HCFC, HFC and related medium viscosity $\leq 2^{\circ} E$ lubricant oil
适用介质温度 Applicable Medium Temperature	-30°C~+105°C
线圈的适用环境温度 Application Ambient Temperature of Solenoid	-40°C~+65°C
线圈的标准电压 Standard Voltage of Solenoid	AC380V, 220V, 110V, 24V/50, 60Hz, DC12V
线圈的允许电压波动 Allowable Voltage Fluctuation for Solenoid	+10%~-15%
线圈的连接 Connection of Solenoid	3线插入式标准连接器 Standard 3-wire insert connector

选型表 Model Selection

结构 Structure	型号 Model	接口 Connection		开启压差△P(bar)		最大工作压力(bar) Max Working Pressure(bar)	Kv值(m³/h)
		规格 Spec	型式 Type	最小 Minimum	最大工作压差 MOPD 液体 Liquid MOP		
直接开启式 Direct Operated	1020-2	1/4	螺口 SAE	0.0	25	45	0.2
	1028-2		焊口 ODF				
	1020-3	3/8	螺口 SAE				0.27
	1028-3		焊口 ODF				
膜片二次开启式 Servo-Operated	1064-3	1/2	螺口 SAE	0.05	25	45	0.8
	1068-3		焊口 ODF				
	1064-4	5/8	螺口 SAE				2.6
	1068-4		焊口 ODF				
	1070-5	3/4	螺口 SAE				0.8
	1078-5		焊口 ODF				
	1070-6	3/4	螺口 SAE				0.2
	1078-6		焊口 ODF				

1) Kv值: 密度为1吨/m³的水在通过电磁阀的压差等于100KPa时的流量, 单位为m³/h;

2) 气态介质的MOPD约高1bar.

1) Kv value: When the pressure differential is 100 KPa, the flowrate at m³/h of water in density 1 t/m³ flows the solenoid valve.

2) The MOPD of gaseous medium is about 1 bar higher than that of liquid.

型号 Model	名义制冷量 KW Nominal Refrigerating Capacity kW											
	液体 Liquid				吸气 Air Suction				热蒸汽 Hot Vapor			
	R22/R407C	R134a	R404A/R507	R410A	R22/R407C	R134a	R404A/R507	R410A	R22/R407C	R134a	R404A/R507	R410A
1020	4.03	3.70	2.80	4.02	0.45	0.33	0.40	0.58	1.85	1.48	1.50	2.80
1028	4.03	3.70	2.80	4.02	0.45	0.33	0.40	0.58	1.85	1.48	1.50	2.80
1064	16.10	14.80	11.20	16.08	1.80	1.30	1.60	2.32	7.40	5.90	6.00	11.18
1068	16.10	14.80	11.20	16.08	1.80	1.30	1.60	2.32	7.40	5.90	6.00	11.18
1070	52.33	48.10	36.40	52.26	5.85	4.23	5.20	7.54	24.05	19.18	19.50	36.34
1078	52.33	48.10	36.40	52.26	5.85	4.23	5.20	7.54	24.05	19.18	19.50	36.34

液体和吸气名义制冷量的工况条件为:

- 蒸发温度 $t_e = +40^{\circ}C$
- 阀前液体温度 $t_1 = +25^{\circ}C$
- 经过电磁阀的压力降 $\Delta P = 15KPa$

The working condition the nominal refrigerating capacity of liquid and air suction is as follows:

- Evaporation Temperature: $t_e = -10^{\circ}C$
- Liquid Temperature before Valve: $t_1 = +25^{\circ}C$
- Pressure Drop after Solenoid Valve: $\Delta P = 15KPa$

热气名义制冷量的工况条件为:


- 冷凝温度 $t_c = +40^{\circ}C$
- 经过电磁阀的压力降 $\Delta P = 80KPa$
- 热气温度 $t_h = +65^{\circ}C$
- 液体制冷剂过冷度 $\Delta t_{sub} = 4K$

The working condition the nominal refrigerating capacity of hot vapor is as follows:

- Condensation Temperature: $t_c = +40^{\circ}C$
- Pressure Drop after Solenoid Valve: $\Delta P = 80KPa$
- Hot Vapor Temperature: $t_h = +65^{\circ}C$
- Liquid Refrigerant Overcooling: $\Delta t_{sub} = 4K$

结构 Structure						
型号 Model	外形尺寸 Overall Dimension					
	A	H	L	L1	ΦD	M
1020-2	75	64	58	—	—	7/16-20UNF
1028-2	75	64	90	7	6.5	—
1020-3	75	64	64	—	—	5/8-18UNF
1028-3	75	64	104	8	10.1	—
1064-3	75	71	81	—	—	5/8-18UNF
1068-3	75	71	108	8	10.1	—
1064-4	75	71	85	—	—	3/4-16UNF
1068-4	75	71	114	10	12.8	—
1070-5	75	74	104	—	—	7/8-14UNF
1078-5	75	74	152	14	16.1	—
1070-6	75	74	104	—	—	1-1/16-14UNS
1078-6	75	74	158	16	19.2	—

HVK型常开电磁阀 Model HVK normal open solenoid valve

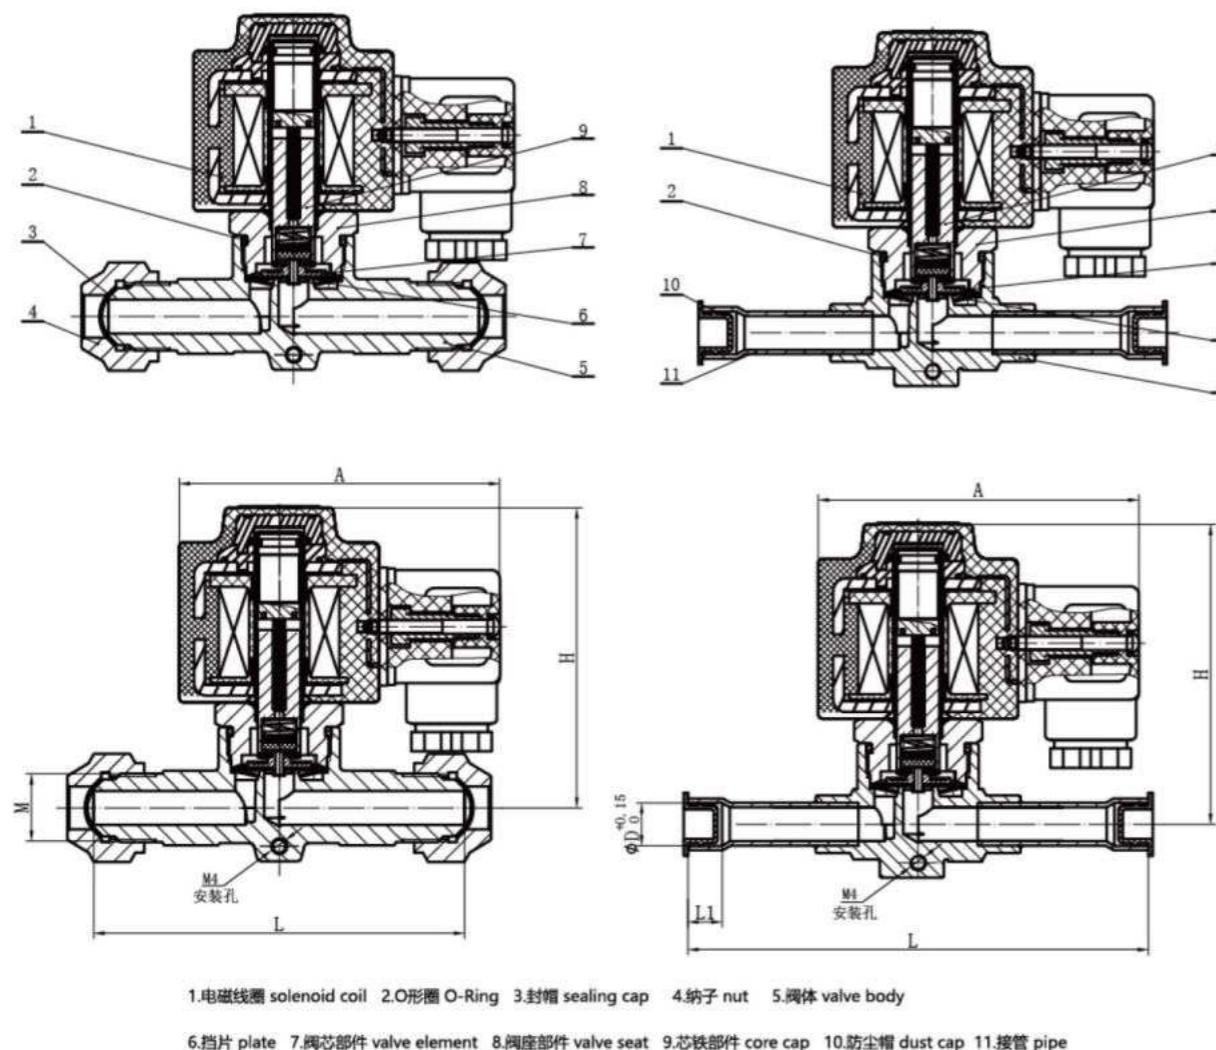

产品概述 Product Description

- HVK型电磁阀是一次开启或二次开启式电磁阀，适用于单向流动。
- HVK型电磁阀用于冷冻、冷藏和空气调节装置的液体、吸气和热气管路上。
- HVK型电磁阀的阀座与密封处具有很好的密封性。
- HVK型电磁阀可提供多种电压的线圈。
- HVK型电磁阀可提供整体供货，也可分体供货，即阀体和线圈分开单独供货。
- Model HVK solenoid valve is a one-step on/off or two-step on/off solenoid valve, which is applicable to one-way flow.
- Model HVK solenoid valve is used on the piping of liquid, suction gas or hot air on the freezing, cold storage and air conditioner units.
- The valve seat and seals of Model HVK solenoid valve have excellent sealing performance.
- Model HVK solenoid valve could be supplied with coils of varied voltage.
- Model HVK solenoid valve could be supplied in assembly or in separate components, that is, the valve body and the coil could be supplied separately.

特点 Features

- | | |
|---|---|
| <ul style="list-style-type: none"> • 可提供常开 (NO) 型阀。 • 可提供多种接口尺寸。 • 多种电源的电磁线圈可选择。 • 功率26VA的电磁线圈，最大工作压差 (MOPD) 可达2.1MPa。 • 夹卡式电磁线圈只需一把螺丝刀可简单地拆卸。 • 可用于冷冻、冷藏和空气调节装置的各种场合。 • 使用寿命长的密封线圈，可在恶劣环境条件下使用。 | <ul style="list-style-type: none"> • Only NO type solenoid valve is available. • Coils of various power supply are available for choice. • For 26VA solenoid,MOPD is up to 2.1 MPa. • For clamping type solenoid valve,it is simple and just need one screwdriver in installation. • It is suitable to various application in freezing,cold storage and air conditioner units. • The sealed coil has a long service life and could be used in adverse circumstances. • 认证 Certification • ISO 9001 • QS (XK-015-00246) • 线圈CE UL |
|---|---|

技术参数 Technical Parameters

适用制冷剂 Applicable Refrigerants	HCFC、HFC 及相应介质粘度 $\leq 2^{\circ} E$ 润滑机油 HCFC, HFC and related medium viscosity $\leq 2^{\circ} E$ lubricant oil
适用介质温度 Applicable Medium Temperature	-30°C~+105°C
线圈的适用环境温度 Application Ambient Temperature of Solenoid	-40°C~+65°C
线圈的标准电压 Standard Voltage of Solenoid	AC380V, 220V, 110V, 24V/50, 60Hz, DC12V
线圈的允许电压波动 Allowable Voltage Fluctuation for Solenoid	+10%~-15%
线圈的连接 Connection of Solenoid	3线插入式标准 连接器 Standard 3-wire insert connector

Model Selection										
Structure	Model	Interface Connection			Opening Pressure Difference ΔP(bar)	Max Working Pressure(bar)	Kv Value(m³/h)	Overall Dimension		
		Spec	Type	Min.						
直接开启式 Direct Operated	HVK3-2	1/4	螺口 SAE	0.0	21 (常开 open)	45	0.2			
	HVK3-2T		焊口 ODF				0.27			
膜片二次开启式 Servo-Operated	HVK3-3	3/8	螺口 SAE	0.05			0.8			
	HVK3-3T		焊口 ODF				2.2			
	HVK8M3	1/2	螺口 SAE	0.05			2.6			
	HVK8M3T		焊口 ODF				2.6			
膜片二次开启式 Servo-Operated	HVK8M4	1/2	螺口 SAE	0.05			5.7			
	HVK8M4T		焊口 ODF				10			
	HVK10M4	5/8	螺口 SAE	0.2						
	HVK10M4T		焊口 ODF							
	HVK10M5	5/8	螺口 SAE	0.2						
	HVK10M5T		焊口 ODF							
	HVK15M5	3/4	螺口 SAE	0.2						
	HVK15M5T		焊口 ODF							
	HVK15M6	3/4	螺口 SAE	0.2						
	HVK15M6T		焊口 ODF							
	HVK20M7T	7/8	螺口 SAE	0.2						
	HVK25M9T	1-1/8	焊口 ODF							

1) Kv值: 密度为1吨/m³的水在通过电磁阀的压差等于100KPa时的流量, 单位为m³/h;

2) 气态介质的MOPD约高1bar。

1) Kv value: The flow rate (m³/h) of water of density 1t/m³ passing through the solenoid valve with the pressure differential of 100 KPa.

2) The MOPD of gaseous medium is about 1 bar higher than that of liquid.

Model	Nominal Refrigerating Capacity kW											
	Liquid			Air Suction			Hot Vapor					
R22/R407C	R134a	R404A/R507	R410A	R22/R407C	R134a	R404A/R507	R410A	R22/R407C	R134a	R404A/R507	R410A	
HVK3-3T	4.03	3.70	2.80	4.02	0.45	0.33	0.40	0.58	1.85	1.48	1.50	2.80
HVK8M3T	16.10	14.80	11.20	16.08	1.80	1.30	1.60	2.32	7.40	5.90	6.00	11.18
HVK10M4T	38.24	35.15	26.60	38.19	4.28	3.09	3.80	5.51	17.58	14.01	14.25	26.55
HVK15M5T	52.33	48.10	36.40	52.26	5.85	4.23	5.20	7.54	24.05	19.18	19.50	36.34
HVK15M7T	100.63	92.50	70.00	100.50	11.25	8.13	10.00	14.50	46.25	36.88	37.50	69.88
HVK25M9T	201.25	185.00	140.00	201.00	22.50	16.25	20.00	29.00	92.50	73.75	75.00	139.75

液体和吸气名义制冷量的工况条件为

The working condition the nominal refrigerating capacity of liquid and air suction is as follows:

蒸发温度 te= -10°C Evaporation Temperature: te = -10°C;

阀前液体温度 t1= +25°C Liquid Temperature before Valve: t1 = +25°C;

经过电磁阀的压力降 ΔP=15KPa Pressure Drop after Solenoid Valve: ΔP = 15KPa

热气名义制冷量的工况条件为

The working condition the nominal refrigerating capacity of hot vapor is as follows:



冷凝温度 tc= +40°C Condensation Temperature: tc = +40°C;

经过电磁阀的压力降 ΔP=0.8bar Pressure Drop after Solenoid Valve: ΔP = 0.8bar;

热气温度 th= +65°C Hot Vapor Temperature: th = +65°C;

液体制冷剂过冷度 Δtsub = 4K Liquid Refrigerant Overcooling: Δtsub = 4K

结构 Structure

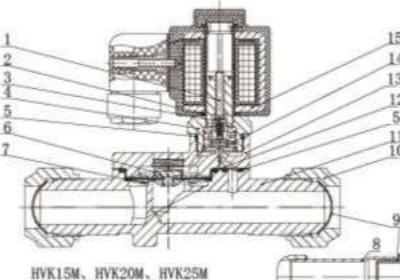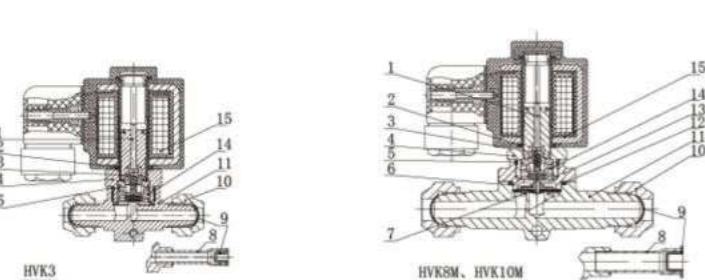

1.传动杆 drive rod 2.耐油橡胶oil-resistance rubber 3.芯铁部件 iron core (改性PTFE密封) (modified PTEE sealing) 4.阀座部件 valve seat 5.O形圈 O-Ring

6.阀芯部件 valve core (移动式) (改性PTFE复合膜片) (mobile) (modified PTFE composite diaphragm) 7.挡片 flapper 8.铜接管 copper tube 9.防尘帽 dust cap

10.接管螺母 connection tube nut 11.阀体 valve body 12.密封垫 PTFE gasket 13.阀盖 valve cover 14.回复弹簧 recovery spring 15.电磁线圈 solenoid coil

Model	Overall Dimension							
	H1	H2	W	L	L1	L2	ØD	Thread M
HVK3-2	12	S24	30	58	13	—	—	7/16-20UNF
HVK3-2T	12	S24	30	90	7	27	6.5	—
HVK3-3	12	S24	30	64	16	—	—	5/8-18UNF
HVK3-3T	12	S24	30	104	8	35	10.1	—
HVK8M3	14	67	36	96	16	—	—	5/8-18UNF
HVK8M3T	14	67	36	124	8	33	10.1	—
HVK8M4	14	67	36	98	17	—	—	3/4-16UNF
HVK8M4T	14	67	36	130	10	36	12.8	—
HVK10M4	15	77	45	103	18	—	—	3/4-16UNF
HVK10M4T	15	77	45	138	10	36	12.8	—
HVK10M5	15	77	45	112	20	—	—	7/8-14UNF
HVK10M5T	15	77	45	156	14	42	16.1	—
HVK15M5	18	88	52	133	19.5	—	—	7/8-14UNF
HVK15M5T	18	88	52	165	14	43	16.1	—
HVK15M6	18	88	52	133	21	—	—	1-1/16-14UNS
HVK15M6T	18	88	52	172	16	46	19.2	—
HVK20M7T	24	92	66	191	17	49	22.3	—
HVK25M9T	26.5	96	73	246	22	73	28.7	—

HV型卸载电磁阀

Model HV Unloading Solenoid Valve



产品概述 Product Description

- HV型卸载电磁阀是一次开启式电磁阀，适用于单向流动。
 - HV型卸载电磁阀用于冷冻、冷藏和空气调节装置的压缩机上。
 - 根据热负荷的减少情况进行自动卸载，从而使压缩机节能，并延长使用寿命。
 - HV型卸载电磁阀的阀座与密封处具有很好的密封性。
 - HV型卸载电磁阀可提供整体供货，也可分体供货，即阀体和线圈分开单独供货。
 - Model HV unloading solenoid valve is a direct-operated valve, which is applicable to one direction flow.
 - Model HV unloading solenoid valve is used on the compressor of the freezer, could store and air conditioning unit. It will automatically unload in accordance with the decrease of heat so that it could save the compressor energy and extend the service life of compressor.
 - The valve seat of Model HV unloading solenoid valve is well sealed with perfect sealing performance.
 - Both packed and separated Model HV unloading solenoid valves are available and it means the valve body could supplied separately from the solenoid.

特点 Features

- 可提供常闭 (NC) 型阀。
 - 设计耐温可达110°C。
 - 10W的大功率电磁线圈，最大工作压差 (MOPD) 可达3.0MPa。
 - 夹卡式电磁线圈可不借助任何工具安装，只需一把螺丝刀就可简单地拆卸。
 - 可用于冷冻、冷藏和空气调节装置的各种压缩机。
 - 使用寿命长的密封线圈，可在恶劣环境条件下使用。

• Only NC type solenoid valve is available.

• The max. design temperature is 110°C.

• 10W high power solenoid and max. operating pressure differential (MOPD) is 3.0 MPa.

• It is applicable to various compressors in freezer,cold store and air conditioning unit.

• The clamped joint solenoid is easy to be mounted or dismounted only with one screwdriver.

• The sealed solenoid has a long service life and it can be used even in an adverse circumstance.

技术参数 Technical Parameters


适用制冷剂 Applicable Refrigerants	HCFC、HFC 及相应介质粘度 $\leq 2^{\circ} E$ 润滑机油 HCFC、HFC and related medium viscosity $\leq 2^{\circ} E$ lubricant oil
适用介质温度 Applicable Medium Temperature	-30°C ~ +105°C
线圈的适用环境温度 Application Ambient Temperature of Solenoid	-40°C ~ +65°C
线圈的标准电压 Standard Voltage of Solenoid	AC220V/50HZ
线圈的允许电压波动 Allowable Voltage Fluctuation for Solenoid	+10%~-15%
线圈的连接 Connection of Solenoid	IP67 附带接线盒 IP67 with terminal box

选型表 Model Selection

型号 Model	接口 Connection		开启压差 ΔP(bar) Pressure Differential to Open Valve		最大工作压力(bar) Max Working Pressure(bar)	Kv值 Kv(m³/h)
	进口端 Inlet	出口端 Outlet	最小 Min	最大工作压力差 (MOPD)		
HV3.2B	法兰连接 Flanged Connectio		0.0	31	45bar	0.27
HV2P	3/8 ODF	3/8 SAE	0.0	31	45bar	0.2


注：Kv值：密度为1吨/m³的水在通过电磁阀的等于100KPa时的流量，单位为m³/h；

Note: Kv: The flow rate (m^3/h) of water of density 1 t/m^3 passing through the solenoid valve under the pressure differential of 100 KPa.

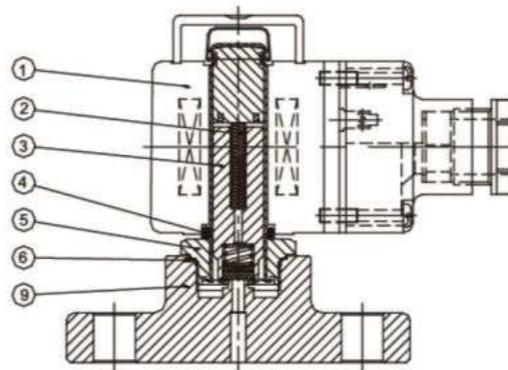

HV3.2B型



- 1.电磁线圈 (10W) solenoid(10W)
 - 2.回复弹簧 return spring
 - 3.芯铁部件 (改性PTFE密封, 进口不锈钢磁钢) iron core(modified PTFE sealing and imported stainless magnet steel)
 4. O-Ring
 - 5.阀座部件 valve seat
 - 6.密封环 sealing

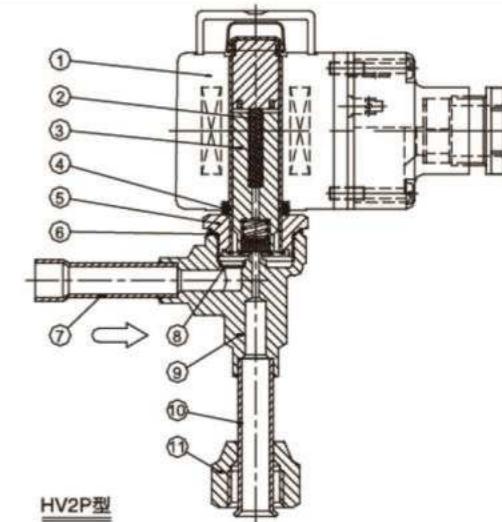


HV2P型

- 7.进口接管 suction tube
 - 8.过滤网 filter
 - 9.阀体 valve body
 - 10.出口接管 outlet tube
 - 11.接管螺母 tube nut

外形尺寸 Overall Dimension

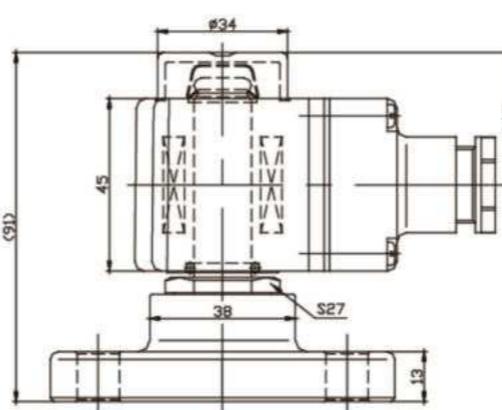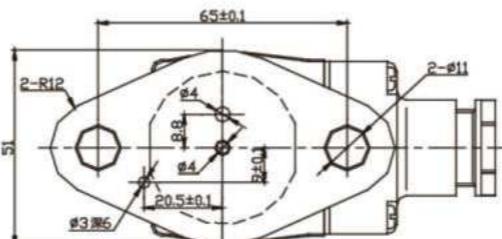

HV3.2B型

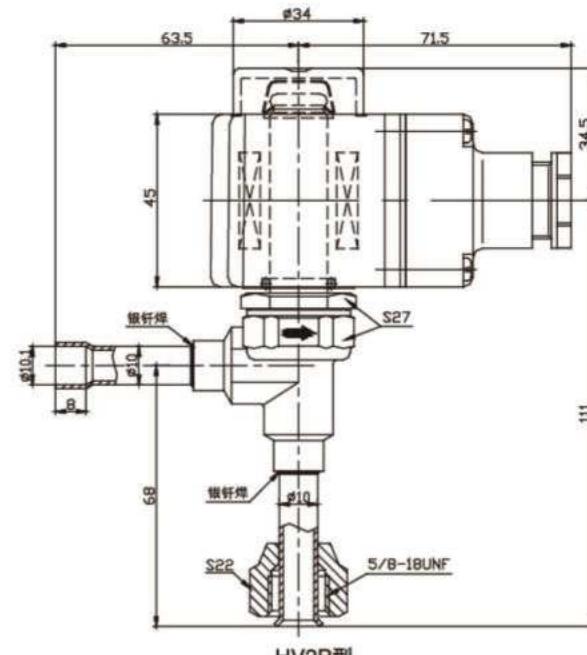


HV2P型

HVS(R)型热氟化霜电磁阀

Model HVS(R) defrosting solenoid valve

外形尺寸 Dimensions



产品概述 Product Description

- HVS(R)型氟化霜电磁阀是应用于制冷系统中专为热氟化霜设计的电磁调节阀；
- 通过电磁控制内部活塞位置来实现切换流道；
- 电磁线圈断电时：2口通道关闭，3口与1口连通，即蒸发器与压缩机回气连通，实现制冷循环；
- 电磁线圈通电时：1口通道关闭，2口通道打开与3口连通，热气进入蒸发器实现化霜；
- 只能与压缩机排气集成管连接，不允许与排气主管连接。

- Model HVS(R) is a solenoid valve specially designed for defrosting in refrigeration system.
- Switch the flow channel by electromagnetically controlling the position of the internal piston.
- When the solenoid coil is powered off: Port 2 will be closed, Port 3 will be connected to Port 1, the evaporator connects to the suction side of the compressor realize the refrigeration cycle;
- When the solenoid coil is powered on: Port 1 will be closed, Port 2 will be connected to Port 3, hot gas goes through the evaporator in order to realize the defrosting
- This valve can Only be connected to the compressor exhaust integrated pipe, DON'T connect it to the exhaust main pipe.

特点 Features



- 专为工业应用场合设计；
- 小体积大口径阀门；
- 高度集成的活塞结构，拧下阀盖螺钉便可对内部所有零部件进行内部清理；
- 精细化设计，实现阀门内泄漏300ml/min以下。
- Specially designed for industrial application;
- Large diameter, compact design, light weight
- Highly integrated piston structure, all internal parts can be cleaned internally by unscrewing the bonnet screw;
- Refined design to achieve internal leakage under 300ml/min

技术参数 Technical Parameters

适用介质 Applicable refrigerant	HCFC/HFC
环境温度 Environment temperature	-35~+65°C
介质温度 Medium temperature	-35~+105°C
适用线圈电压 Rated voltage	220V±10% -15% / 50HZ
线圈的连接 Coil connection	3线插入式标准连接器 3-wire plug-in standard connector

选型表 Model Selection

规格 Model	最高工作压力 Max.OP(bar)	最大工作压力差 Max.OPD(bar)	最小工作压力差 Min. OPD(bar)	KV值 Kv Value(m³/h)	
				热气 Hot gas	液体 Liquid
HVS(R)-27-22	30	21	2.5	热气 Hot gas	7.1
HVS(R)-34-27				热气 Hot gas	8.3
HVS(R)-42-34				热气 Hot gas	9.5
HVS(R)-48-42				热气 Hot gas	13.7
				热气 Hot gas	12.7
				热气 Hot gas	20.2
				热气 Hot gas	12.7
				液体 Liquid	20.2

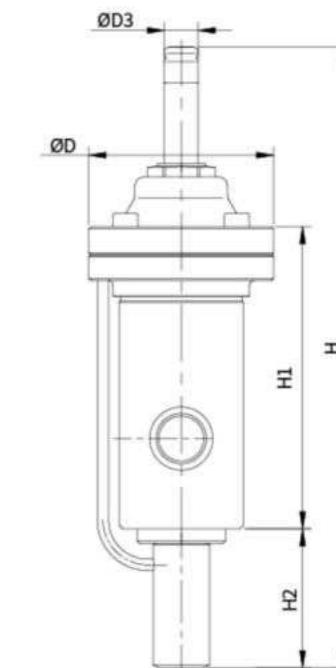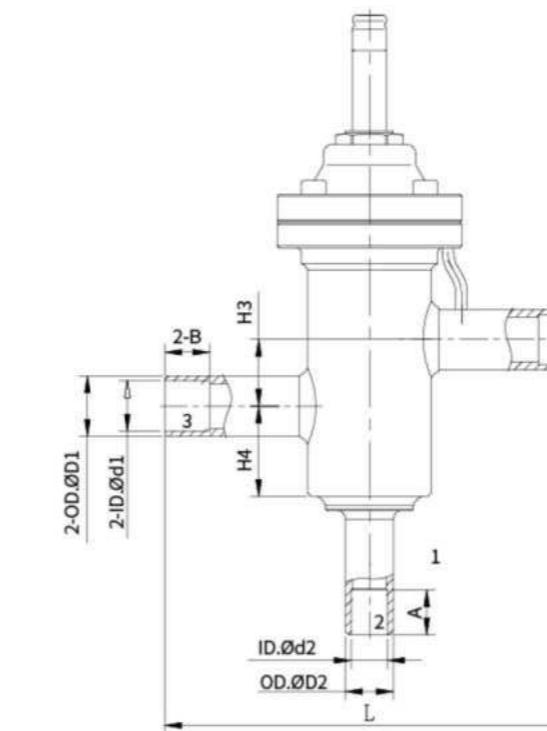

型号 Model	外形尺寸 Size													
	H	H1	H2	H3	H4	L	D	D1	D2	D3	d1	d2	A	B
HVS(R)-27-22	275	134	61.5	29.5	40	182	82	26.9	21.3	15	22.5	16.2	20	20
HVS(R)-34-27	315	162	72.5	35	47	127	102.5	33.7	26.9	15	28.9	22.5	25	20
HVS(R)-42-34	351	188	80	47	59	145	111	42.4	33.7	15	35.3	28.9	25	25
HVS(R)-48-42	351	188	80	47	59	145	111	48.3	42.4	15	42.3	35.3	25	25

HVDF型活塞式电磁阀

Model HVDF Piston Type Solenoid Valve



产品概述 Product Description

- HVDF型塞式电磁阀是二次开启式电磁阀，适用于单向流动。
- HVDF型塞式电磁阀用于冷冻、冷藏和空气调节装置的液体、吸气和热气管路上。
- HVDF型塞式电磁阀可提供多种电压的线圈，而阀体是通用的。
- HVDF型塞式电磁阀可提供分体供货，即阀体和线圈分开单价独供。

- Model HVDF piston type solenoid valve is a twice open-type solenoid valve to be suitable to one-way flow.
- Model HVDF piston type solenoid valve is used on the liquid, air suction and hot vapor pipes of the refrigeration, cold storage and air conditioning facilities.
- The coil of varies voltages is available for Model HVDF piston type solenoid valve with universal valve body.
- Model HVDF piston type solenoid valve could be supplied in split, that means valve body and coil could be supplied separately.

特点 Features

- 专利线圈，防水性能好 (IP65)。
- 应用新材料，耐高低温性能好。
- 24W的大功率电磁线圈，开阀能力大。
- 活塞行程大，工作流量大。
- 多种交流和直流电磁线圈可供选择。
- 焊接连接可达2-3/8in。

- The proprietary coil has perfect waterproof performance (IP65).
- Using new material, it has performance in high and low temperature application.
- The 24W high-power solenoid coil has high capability to open the valve.
- The high flow rate is assured by a big piston stroke.
- Various AC and DC solenoid coils are available for choice.
- 2-3/8 inch is the maximum welded connection size.

技术参数 Technical Parameters

适用制冷剂 Applicable Refrigerants	HCFC or HFC(客户指定 Customer specified)
适用介质温度 Applicable Medium Temperature	-30°C~+105°C
线圈的适用环境温度 Application Ambient Temperature of Solenoid	-40°C~+65°C
线圈的标准电压 Standard Voltage of Solenoid	AC 380V, AC 220V/50Hz(也可按客户指定做 Customer design is available)
线圈的允许电压波动 Allowable Voltage Fluctuation for Solenoid	+10%~-15%
线圈的连接 Connection of Solenoid	3线插入式标准连接器 Standard 3-wire insert connector

选型表 Model Selection

型号 Model	规格Size 焊接口 Weld Connection	开启差值ΔP(bar)			最大工作压力(bar) Max Working Pressure(bar)	Kv值 Kv(m³/h)
		最小Min	最大工作压力差MOPD	液体 Liquid MOP		
HVDF25-9	Ø28.2 ODF	0.2	31		45	10
HVDF25-11	Ø33.7 ODF	0.2	31		45	10
HVDF32-13	Ø42.4 ODF	0.2	31		45	16
HVDF40-15	Ø48.3 ODF	0.2	31		45	25
HVDF50-19	Ø59.3 ODF	0.2	31		45	28

1) Kv值：密度为1吨/m³的水在通过电磁阀的压差等于100KPa时的流量，单位为m³/h;

2) 气态介质的MOPD约高1bar.

1) Kv value: The flow rate (m³/h) of water of density 1t/m³ passing through the solenoid valve with the pressure differential of 100 KPa.

2) The MOPD of gaseous medium is about 1 bar higher than that of liquid.

型号 Model	名义制冷量 KW Nominal Refrigerating Capacity kW											
	液体 Liquid				吸气 Air Suction				热蒸气 Hot Vapor			
R22/R407C	R134a	R404A/R507	R410A	R22/R407C	R134a	R404A/R507	R410A	R22/R407C	R134a	R404A/R507	R410A	
HVDF25-9	201.25	185.00	140.00	201.00	22.50	16.25	20.00	29.00	92.50	73.75	75.00	139.75
HVDF25-11	201.25	185.00	140.00	201.00	22.50	16.25	20.00	29.00	92.50	73.75	75.00	139.75
HVDF32-13	322.00	296.00	224.00	321.60	36.00	26.00	32.00	46.00	148.00	118.00	120.00	223.60
HVDF40-15	503.13	462.50	350.00	502.50	56.25	40.63	50.00	72.50	231.25	184.38	187.50	349.38
HVDF50-19	563.50	518.00	392.00	562.80	63.00	45.50	56.00	81.20	259.00	206.50	210.00	391.30

液体和吸气名义制冷量的工况条件为

The working condition the nominal refrigerating capacity of liquid and air suction is as follows:

蒸发温度 tc=-10°C Evaporation Temperature: te = -10°C;

阀前液体温度 t1=+25°C Liquid Temperature before Valve: t1 = +25°C;

经过电磁阀的压力降 ΔP=15KPa Pressure Drop after Solenoid Valve: △P = 15KPa

热气名义制冷量的工况条件为

The working condition the nominal refrigerating capacity of hot vapor is as follows:

冷凝温度 tc=+40°C Condensation Temperature: tc = +40°C;


经过电磁阀的压力降 ΔP=0.8bar Pressure Drop after Solenoid Valve: △P = 0.8bar;

热气温度 th=+65°C Hot Vapor Temperature: th = +65°C;

液体制冷剂过冷度 Δtsub=4K Liquid Refrigerant Overcooling: △tsub= 4K


结构 Structure

- | | |
|----------------------|-------------------------------|
| 1. 复位弹簧 reset spring | 9. 阀体 valve body |
| 2. 芯铁部件 core iron | 10. 防尘帽 dust cap |
| 3. 阀座部件 valve seat | 11. O形圈 O-ring |
| 4. 阀盖 bonnet | 12. 空心销 Hollow pin |
| 5. 复位弹簧 reset spring | 13. 阀芯 value element |
| 6. 活塞部件 piston | 14. 阀芯垫片 value element gasket |
| 7. 活塞芯 piston core | 15. 密封环 seal ring |
| 8. 密封垫 PTFE gasket | 16. O形圈 O-ring |

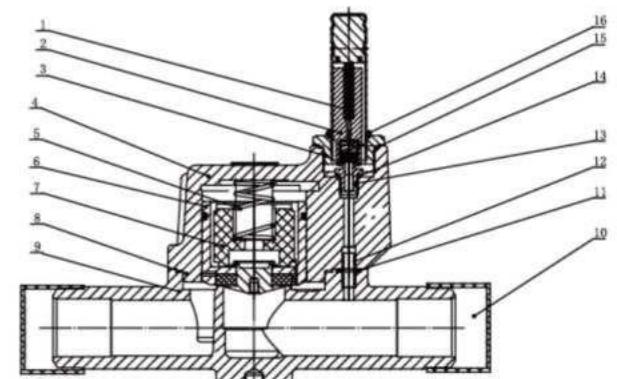


外形尺寸 Overall Dimension

型号 Model	外形尺寸 Overall Dimension						
	D1	D2	L1	L2	L3	H1	H2
HVDF25-9	28.2	24.4	25	12	170	26	159
HVDF25-11	33.7	26	25	12	170	26	159
HVDF32-13	42.4	33	25	12	194	29.5	169
HVDF40-15	48.3	29.5	25	12	208	33	176
HVDF50-19	59.3	51	25	12	207	38	199

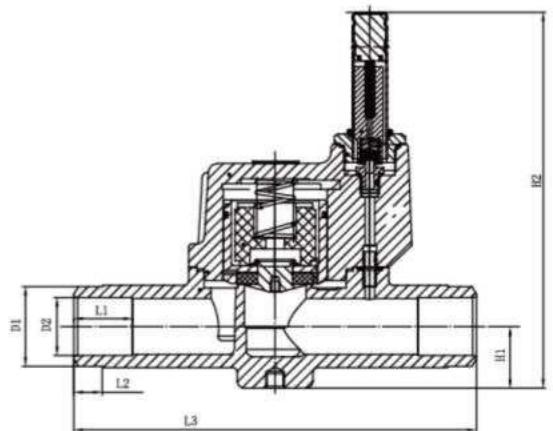

HVPF型活塞式电磁阀

Model HVPF Piston Type Solenoid Valve

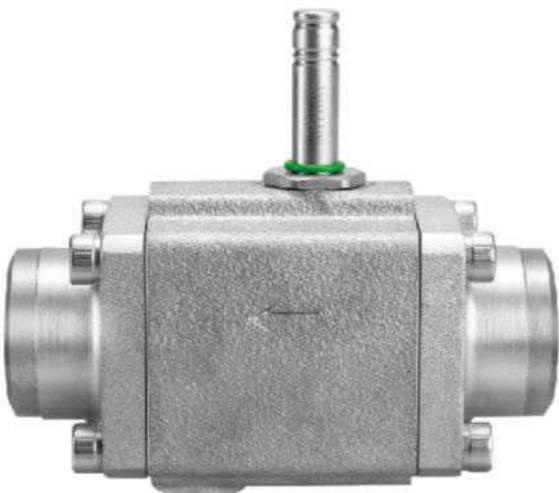

产品概述 Product Description

- HVPF型塞式电磁阀是二次开启式电磁阀，适用于单向流动。
- HVPF型塞式电磁阀用于冷冻、冷藏和空气调节装置的液体、吸气和热气管路上。
- HVPF型塞式电磁阀可提供多种电压的线圈，而阀体是通用的。
- HVPF型塞式电磁阀可提供分体供货，即阀体和线圈分开单价独供货。
- Model HVPF piston type solenoid valve is a twice open-type solenoid valve to be suitable to one-way flow.
- Model HVPF piston type solenoid valve is used on the liquid, air suction and hot vapor pipes of the refrigeration, cold storage and air conditioning facilities.
- The coil of varies voltages is available for Model HVPF piston type solenoid valve with a universal valve body.
- Model HVPF piston type solenoid valve could be supplied in split, that means valve body and coil could be supplied separately.

特点 Features

- 专利线圈，防水性能好 (IP65)。
- 应用新材料，耐高低温性能好。
- 24W的大功率电磁线圈，开阀能力大。
- 活塞行程大，工作流量大。
- 多种交流和直流电磁线圈可供选择。
- 焊接连接可达2-3/8in。
- The proprietary coil has perfect waterproof performance (IP65).
- Using new material, it has performance in high and low temperature application.
- The 24W high-power solenoid coil has high capability to open the valve.
- The high flow rate is assured by a big piston stroke.
- Various AC and DC solenoid coils are available for choice.
- 2-3/8inch is the maximum welded connection size.

技术参数 Technical Parameters

适用制冷剂 Applicable Refrigerants	HFC or HFC(客户指定 Customer specified)
适用介质温度 Applicable Medium Temperature	-30°C~+105°C
线圈的适用环境温度 Application Ambient Temperature of Solenoid	-40°C~+65°C
线圈的标准电压 Standard Voltage of Solenoid	AC 380V, AC 220V/50Hz(也可按客户指定做 Customer design is available)
线圈的允许电压波动 Allowable Voltage Fluctuation for Solenoid	+10%~-15%
线圈的连接 Connection of Solenoid	3线插入式标准连接器 Standard 3-wire insert connector

选型表 Model Selection

型号 Model	规格Size 焊接口 Weld Connection	开启差值ΔP(bar)		最大工作压力(bar) Max Working Pressure(bar)	Kv值 Kv(m³/h)
		最小Min	最大工作压力差MOPD 液体 LiquidMOP		
HVPF32	Ø35 ODF	0.2	31	45	10
HVPF40	Ø42 ODF	0.2	31	45	16
HVPF45	Ø48.3 ODF	0.2	31	45	25
HVPF54	Ø54.5 ODF	0.2	31	45	28
HVPF60	Ø60.3 ODF	0.2	31	45	30

1) Kv值：密度为1吨/m³的水在通过电磁阀的压差等于100KPa时的流量，单位为m³/h;

2) 气态介质的MOPD约高1bar。

1) Kv value: The flow rate (m³/h) of water of density 1t/m³ passing through the solenoid valve with the pressure differential of 100 KPa.

2) The MOPD of gaseous medium is about 1 bar higher than that of liquid.

型号 Model	名义制冷量 KW Nominal Refrigerating Capacity kW											
	液体 Liquid				吸气 Air Suction				热蒸汽 Hot Vapor			
	R22/R407C	R134a	R404A/R507	R410A	R22/R407C	R134a	R404A/R507	R410A	R22/R407C	R134a	R404A/R507	R410A
HVPF32	201.25	185.00	140.00	201.00	22.50	16.25	20.00	29.00	92.50	73.75	75.00	139.75
HVPF40	322.00	296.00	224.00	321.60	36.00	26.00	32.00	46.40	148.00	118.00	120.00	223.60
HVPF45	503.13	462.50	350.00	502.50	56.25	40.63	50.00	72.50	231.25	184.38	187.50	349.38
HVPF54	563.50	518.00	392.00	562.80	63.00	45.50	56.00	81.20	259.00	206.50	210.00	391.30
HVPF60	603.75	555.00	420.00	603.00	67.50	48.75	60.00	87.00	277.50	221.25	225.00	419.25

液体和吸气名义制冷量的工况条件为

The working condition the nominal refrigerating capacity of liquid and air suction is as follows:

蒸发温度 tc=-10°C Evaporation Temperature: te = -10°C;

阀前液体温度 t1=+25°C Liquid Temperature before Valve: t1 = +25°C;

经过电磁阀的压力降 ΔP=15KPa Pressure Drop after Solenoid Valve: ΔP = 15KPa

热气名义制冷量的工况条件为

The working condition the nominal refrigerating capacity of hot vapor is as follows:

冷凝温度 tc=+40°C Condensation Temperature: tc = +40°C;


经过电磁阀的压力降 ΔP=0.8bar Pressure Drop after Solenoid Valve: ΔP = 0.8bar;

热气温度 th=+65°C Hot Vapor Temperature: th = +65°C;

液体制冷剂过冷度 Δtsub=4K Liquid Refrigerant Overcooling: Δtsub = 4K


结构 Structure

- | | |
|------------------------|-----------------------------|
| 1. 阀体 valve body | 11.O形圈O-ring |
| 2. 活塞部件 piston | 12.芯铁部件core iron |
| 3. 弹簧spring | 13.复位弹簧reset spring |
| 4. 活塞芯piston core | 14.阀座部件valve seat |
| 5. 密封座sealing seat | 15.密封环seal ring |
| 6. 法兰组件Flange assembly | 16.阀芯value element |
| 7. 定位销dowel pin | 17.阀芯垫片value element gasket |
| 8. 卡环 snap ring | 18.过滤网组件filter assembly |
| 9. O形圈O-ring | 19.挡圈retainer ring |
| 10. 密封垫 PTFE gasket | 20.螺钉screw |

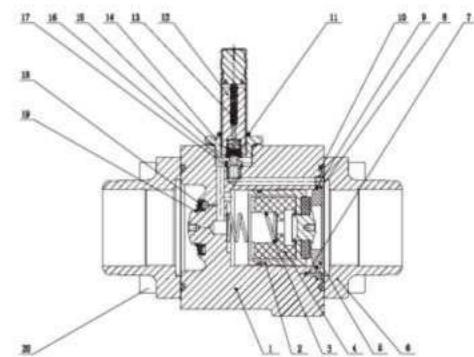

外形尺寸 Overall Dimension

型号 Model	外形尺寸 Overall Dimension						
	D1	D2	L1	L2	L3	H1	H2
HVPF32	35	26	25	10	174.5	51.5	155.5
HVPF40	42	33	25	10	174.5	51.5	155.5
HVPF45	48.3	39.5	25	10	174.5	51.5	155.5
HVPF54	54.5	45	25	10	174.5	51.5	155.5
HVPF60	60.3	50	25	10	174.5	51.5	155.5

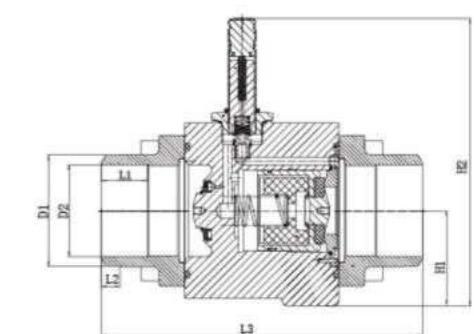

热力膨胀阀系列

THERMOSTATIC EXPANSION VALVE Series

REFRIGERATION A/C SYSTEM ACCESSORIES



采用进口膜片，线性更稳定

采用独特的充注技术，库内库外均可使用

Using imported diaphragm, linearity is more stable.

With unique charging technology, can be used in/outside of the cold room.

TH THW 型热力膨胀阀 TH/ THW Thermostatic Expansion Valve



TH型
Model TH

阀芯
Orifice

THW型
Model THW

产品概述 Product Description

• T型膨胀阀是一种可换芯的新型热力膨胀阀	• T-type expansion valve is a novel thermostatic expansion valve with replaceable valve element
• T型膨胀阀用于调节蒸发器中液体制冷剂的供给量	• T-type expansion valve is used for adjusting the supply quantity of liquid refrigerant in evaporator
• T型膨胀阀特别适合于干式蒸发器中制冷剂液体的供给	• T-type expansion valve is particularly suitable for supplying liquid refrigerant in dry-type evaporator
• T型膨胀阀是通过制冷剂的过热度调节来进行自动控制的	• T-type expansion valve has autocontrol through regulating the superheating degree of refrigerant.

特点 Features


• 蒸发温度范围大	• Large scope of evaporating temperature.
• 可提供MOP功能，可使压缩机电机不会因过高的蒸发压力而损伤。	• be capable of providing MOP function so as not to damage the compressor motor due to overhigh evaporating pressure.
• 具有内外平衡两种形式，能有效的消除蒸发器压力损失带来的影响。	• Have two forms of internal and external equaliser, be capable of removing influence brought by loss of evaporator pressure effectively.
• 具有发明专利的膜片结构，大大改善了低温下的工作性能。	• Have the membrane structure with invention patent, greatly improve the working performance at low temperature.
• 阀帽采用二次密封结构，有效降低外泄漏率。	• The bonnet adopts a secondary sealing structure to reduce the percentage of external leakage.
• 带过滤功能的可换阀芯组件，便于库存、匹配和维修。	• With fitting orifice, convenient storage, matching and maintenance
• 温包采用混合充注技术，使整个蒸发温度范围内都具有等过热度特性。	• The temperature wrap has mixed charging technology so as to have the feature of superheating degree within the whole evaporating temperature range

技术参数 Technical Parameters


适用制冷剂 Applicable Refrigerants	R22/R407C、R134a、R404/R507、R410A冷媒等介质	• T型热力膨胀阀毛细管长度：标准1.5m，特殊情况可按用户要求。
适用介质温度 Applicable Medium	R22/R407C/R404A/R507/R410A:-40℃~+10℃;R134a:-30℃~+10℃	• Capillary length of T-type thermostatic expansion valve: 1.5m standard; under special situation, it can be customized based on clients' requirements.
名义容量 Nominal Capacity	1.6KW~18.2KW	
过热度调节范围 Adjustable Range of Superheat	2℃~8℃	
出厂静热度调定值 Ex-Works Static Heat Adjustment	3.5℃	
最大工作压力 Maximum Working Pressure	3.4MPa/4.6MPa (R410A)	

制冷剂 Refrigerant	型号 Model	阀芯 Spool	冷凝温度 (℃) Condensing Temp	制冷量(KW)/(TR)										
				蒸发温度(℃) Evaporation temperature										
				-40	-35	-30	-25	-20	-15	-10	-5	0	5	
R22/R407C	TH22/ TH22W	0#	25	0.933/0.26	1.04/0.30	1.16/0.33	1.26/0.36	1.36/0.39	1.44/0.41	1.50/0.43	1.53/0.44	1.52/0.43	1.46/0.42	1.34/0.38
		1#		1.3/0.37	1.48/0.42	1.69/0.48	1.91/0.55	2.14/0.61	2.36/0.67	2.58/0.74	2.75/0.79	2.86/0.82	2.86/0.82	2.72/0.78
		2#		1.46/0.42	1.69/0.48	1.94/0.55	2.22/0.63	2.52/0.72	2.85/0.81	3.18/0.91	3.49/1	3.75/1.07	3.88/1.11	3.81/1.09
		3#		2.44/0.7	2.83/0.81	3.26/0.93	3.73/1.07	4.24/1.21	4.78/1.37	5.33/1.52	5.85/1.67	6.29/1.8	6.53/1.87	6.46/1.85
		4#		3.52/1.01	4.07/1.16	4.70/1.34	5.42/1.55	6.24/1.78	7.11/2.03	8.02/2.29	8.87/2.53	9.55/2.73	9.88/2.82	9.71/2.77
		5#		4.6/1.31	5.31/1.52	6.14/1.75	7.08/2.02	8.15/2.33	9.34/2.67	10.62/3.03	11.86/3.39	12.91/3.69	13.48/3.85	13.29/3.8
		6#		5.43/1.55	6.26/1.79	7.22/2.06	8.32/2.38	9.56/2.73	10.95/3.13	12.43/3.55	13.91/3.97	15.18/4.34	15.91/4.55	15.71/4.49
	TH22/ TH22W	0#	35	0.96/0.27	1.08/0.31	1.20/0.34	1.32/0.38	1.44/0.41	1.54/0.44	1.63/0.46	1.70/0.48	1.74/0.49	1.73/0.49	1.69/0.48
		1#		1.34/0.38	1.54/0.44	1.76/0.5	2/0.57	2.26/0.65	2.53/0.72	2.8/0.8	3.06/0.87	3.27/0.93	3.4/0.97	3.43/0.98
		2#		1.52/0.43	1.76/0.5	2.03/0.58	2.34/0.67	2.68/0.77	3.06/0.87	3.46/0.99	3.88/1.11	4.29/1.23	4.63/1.32	4.83/1.38
		3#		2.56/0.73	2.97/0.85	3.44/0.98	3.95/1.13	4.52/1.29	5.16/1.47	5.84/1.67	6.55/1.87	7.24/2.07	7.83/2.24	8.2/2.34
		4#		3.77/1.08	4.34/1.24	5.02/1.43	5.8/1.66	6.69/1.91	7.7/2.2	8.8/2.51	9.94/2.84	11.03/3.15	11.92/3.41	12.45/3.56
		5#		4.92/1.41	5.67/1.62	6.54/1.87	7.57/2.16	8.76/2.5	10.13/2.89	11.68/3.34	13.35/3.81	15/4.29	16.4/4.69	17.19/4.91
		6#		5.77/1.65	6.65/1.9	7.66/2.19	8.85/2.53	10.23/2.92	11.82/3.38	13.62/3.89	15.59/4.45	17.57/5.02	19.3/5.51	20.32/5.81
R134a	TH22/ TH22W	0#	45	0.98/0.28	1.10/0.31	1.23/0.35	1.36/0.39	1.48/0.42	1.60/0.45	1.70/0.48	1.79/0.51	1.86/0.53	1.89/0.54	1.89/0.54
		1#		1.37/0.39	1.58/0.45	1.81/0.52	2.06/0.59	2.33/0.67	2.63/0.75	2.93/0.84	3.24/0.93	3.51/1	3.74/1.07	3.87/1.11
		2#		1.56/0.45	1.81/0.52	2.09/0.6	2.41/0.69	2.77/0.79	3.18/0.91	3.64/1.04	4.13/1.18	4.63/1.32	5.11/1.46	5.48/1.57
		3#		2.64/0.75	3.07/0.88	3.55/1.01	4.09/1.17	4.71/1.35	5.41/1.55	6.18/1.77	7.03/2.01	7.91/2.26	8.75/2.5	9.42/2.69
		4#		3.96/1.13	4.55/1.3	5.24/1.5	6.05/1.73	6.98/1.99	8.05/2.3	9.26/2.65	10.56/3.02	11.9/3.4	13.15/3.76	14.17/4.05
		5#		5.17/1.48	5.94/1.7	6.84/1.95	7.91/2.26	9.16/2.62	10.64/3.04	12.53/3.58	14.28/4.08	16.35/4.67	18.32/5.23	19.87/5.68
		6#		6.04/1.73	6.94/1.98	7.99/2.28	9.22/2.63	10.68/3.05	12.39/3.54	14.38/4.11	16.65/4.76	19.13/5.47	21.57/6.16	23.55/6.73
	TH134/ TH134w	0#	55	0.98/0.28	1.10/0.31	1.23/0.35	1.35/0.38	1.48/0.42	1.60/0.45	1.72/0.49	1.82/0.52	1.90/0.54	1.96/0.56	1.98/0.56
		1#		1.38/0.39	1.59/0.45	1.82/0.52	2.07/0.59	2.35/0.67	2.66/0.76	2.98/0.85	3.3/0.94	3.61/1.03	3.88/1.11	4.08/1.17
		2#		1.58/0.45	1.83/0.52	2.12/0.61	2.44/0.7	2.81/0.8	3.24/0.93	3.71/1.06	4.24/1.21	4.79/1.37	5.34/1.53	5.81/1.66
		3#		2.68/0.77	3.11/0.89	3.6/1.03	4.16/1.19	4.8/1.37	5.52/1.58	6.34/1.81	7.26/2.07	8.25/2.36	9.24/2.64	10.09/2.88
		4#		4.11/1.17	4.66/1.33	5.38/1.54	6.19/1.77	7.13/2.04	8.21/2.35	9.43/2.69	10.79/3.08			

Model Selection														
制冷剂 Refrigerant	型号 Model	阀芯 Spool	冷凝温度 (°C) Condensing Temp	制冷量(KW)/(TR)										
				蒸发温度(°C) Evaporation temperature										
				-40	-35	-30	-25	-20	-15	-10	-5	0	5	10
R134a	TH134/ TH134w	0#	45	0.52/0.15	0.59/0.17	0.67/0.19	0.76/0.22	0.85/0.24	0.94/0.27	1.04/0.30	1.13/0.32	1.21/0.34	1.28/0.36	1.35/0.38
		1#		0.77/0.22	0.83/0.24	0.96/0.27	1.08/0.31	1.34/0.38	1.46/0.42	1.73/0.49	1.92/0.55	2.11/0.60	2.25/0.64	2.53/0.72
		2#		0.81/0.23	0.92/0.26	1.12/0.32	1.33/0.38	1.52/0.43	1.69/0.48	1.92/0.55	2.23/0.64	2.53/0.72	2.85/0.81	3.16/0.90
		3#		1.42/0.41	1.66/0.47	1.83/0.52	2.16/0.62	2.49/0.71	2.75/0.79	3.34/0.95	3.71/1.06	4.23/1.21	4.69/1.34	5.32/1.52
		4#		2.11/0.60	2.42/0.69	2.68/0.77	3.21/0.92	3.58/1.02	4.26/1.22	4.76/1.36	5.61/1.60	6.31/1.80	7.12/2.03	7.85/2.24
		5#		2.83/0.81	3.15/0.90	3.66/1.05	4.15/1.19	4.86/1.39	5.55/1.59	6.25/1.79	7.28/2.08	8.15/2.33	9.25/2.64	10.29/2.94
	TH134/ TH134w	6#		3.36/0.96	3.72/1.06	4.31/1.23	4.94/1.41	5.62/1.61	6.52/1.86	7.46/2.13	8.63/2.47	9.91/2.83	11.2/3.20	12.44/3.55
		0#	55	0.51/0.15	0.58/0.16	0.66/0.19	0.74/0.21	0.84/0.24	0.95/0.27	1.03/0.29	1.13/0.32	1.22/0.35	1.31/0.37	1.38/0.39
		1#		0.75/0.21	0.82/0.23	0.96/0.27	1.13/0.32	1.32/0.38	1.56/0.45	1.75/0.50	1.93/0.55	2.14/0.61	2.33/0.67	2.54/0.73
		2#		0.83/0.24	0.95/0.27	1.12/0.32	1.28/0.37	1.49/0.43	1.78/0.51	1.89/0.54	2.15/0.61	2.53/0.72	2.75/0.79	3.18/0.91
		3#		1.44/0.41	1.62/0.46	1.82/0.52	2.06/0.59	2.38/0.68	2.69/0.77	3.41/0.97	3.74/1.07	4.26/1.22	4.63/1.32	5.26/1.50
		4#		2.11/0.60	2.42/0.69	2.83/0.81	3.25/0.93	3.65/1.04	4.26/1.22	4.76/1.36	5.53/1.58	6.21/1.77	7.08/2.02	7.93/2.27
		5#		2.86/0.82	3.21/0.92	3.56/1.02	4.23/1.21	4.91/1.40	5.52/1.58	6.33/1.81	7.23/2.07	8.21/2.35	9.4/2.69	10.3/2.94
		6#		3.29/0.94	3.74/1.07	4.29/1.23	4.92/1.41	5.82/1.66	6.43/1.84	7.52/2.15	8.66/2.47	9.85/2.81	11.2/3.20	12.35/3.53
R404A/R507	TH404/ TH404W	0#	25	0.69/0.20	0.79/0.22	0.89/0.25	0.98/0.28	1.06/0.30	1.13/0.32	1.17/0.33	1.19/0.34	1.18/0.34	1.13/0.32	1.05/0.30
		1#		0.99/0.28	1.18/0.34	1.39/0.4	1.65/0.47	1.83/0.52	1.93/0.55	2.13/0.61	2.23/0.64	2.41/0.69	2.43/0.69	2.36/0.67
		2#		1.12/0.32	1.34/0.38	1.56/0.45	1.93/0.55	2.21/0.63	2.52/0.72	2.85/0.81	3.02/0.86	3.32/0.95	3.19/0.91	3.15/0.9
		3#		1.13/0.32	2.22/0.63	2.67/0.76	3.12/0.89	3.71/1.06	4.15/1.19	4.65/1.33	5.31/1.52	5.53/1.58	5.5/1.57	5.36/1.53
		4#		2.73/0.78	3.21/0.92	3.83/1.09	4.62/1.32	5.44/1.55	6.13/1.75	7.21/2.06	7.82/2.23	8.52/2.43	8.72/2.49	8.59/2.45
		5#		3.52/1.01	4.23/1.21	5.03/1.44	6.03/1.72	7.21/2.06	8.26/2.36	9.35/2.67	10.34/2.95	11.23/3.21	11.43/3.27	11.17/3.19
	TH404/ TH404W	6#		4.23/1.21	5.02/1.43	6.11/1.75	7.12/2.03	8.36/2.39	9.85/2.81	11.13/3.18	12.56/3.59	13.41/3.83	13.8/3.94	13.25/3.79
		0#	35	0.64/0.18	0.74/0.21	0.85/0.24	0.95/0.27	1.04/0.30	1.13/0.32	1.20/0.34	1.26/0.36	1.29/0.37	1.29/0.37	1.25/0.36
		1#		0.93/0.27	1.16/0.33	1.25/0.36	1.63/0.47	1.82/0.52	1.98/0.57	2.35/0.67	2.39/0.68	2.65/0.76	2.77/0.79	2.68/0.77
		2#		1.21/0.35	1.25/0.36	1.53/0.44	1.82/0.52	2.13/0.61	2.61/0.75	2.91/0.83	3.41/0.97	3.49/1	3.65/1.04	3.95/1.13
		3#		1.69/0.48	2.11/0.6	2.67/0.76	3.15/0.9	3.65/1.04	4.29/1.23	4.92/1.41	5.63/1.61	6.03/1.72	6.62/1.89	6.63/1.89
		4#		2.54/0.73	3.06/0.87	3.85/1.1	4.61/1.32	5.51/1.57	6.51/1.86	7.46/2.13	8.62/2.46	9.38/2.68	10.31/2.95	10.62/3.03
		5#		3.46/0.99	3.99/1.14	4.91/1.4	5.81/1.66	7.12/2.03	8.22/2.34	9.75/2.79	11.21/3.2	12.53/3.58	13.52/3.86	13.59/3.88
	TH404/ TH404W	6#		4.12/1.18	4.76/1.36	5.86/1.67	7.1/2.03	8.33/2.38	10.1/2.89	11.8/3.37	13.52/3.86	14.92/4.26	16.03/4.58	16.25/4.64
		0#	45	0.57/0.16	0.67/0.19	0.77/0.22	0.87/0.25	0.96/0.27	1.06/0.30	1.15/0.33	1.21/0.34	1.29/0.37	1.32/0.38	1.32/0.38
		1#		0.88/0.25	0.98/0.28	1.16/0.33	1.46/0.42	1.72/0.49	1.79/0.51	2.25/0.64	2.51/0.72	2.61/0.75	2.72/0.78	2.93/0.84
		2#		0.96/0.27	1.22/0.35	1.42/0.41	1.75/0.5	2.03/0.58	2.45/0.7	2.71/0.77	3.22/0.92	3.53/1.01	3.95/1.13	4.22/1.21
		3#		1.55/0.44	2.05/0.59	2.51/0.72	2.93/0.84	3.51/1	4.23/1.21	4.92/1.41	5.61/1.6	6.13/1.75	6.68/1.91	7.15/2.04
		4#		2.36/0.67	2.92/0.83	3.66/1.05	4.21/1.2	5.23/1.49	6.21/1.77	7.35/2.1	8.38/2.39	9.65/2.76	10.92/3.12	11.29/3.23
		5#		3.25/0.93	3.82/1.09	4.53/1.29	5.49/1.57	6.6/1.89	8.1/2.31	9.49/2.71	11.1/3.17	13.1/3.74	14.25/4.07	15.02/4.29
	TH404/ TH404W	6#		3.78/1.08	4.56/1.3	5.51/1.57	6.63/1.89	7.85/2.24	9.7/2.77	11.52/3.29	13.6/3.89	15.33/4.38	16.8/4.8	17.85/5.1
		0#	55	0.										

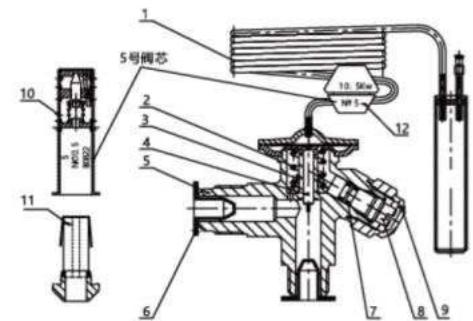


1.气箱头部件; 2.调节弹簧; 3.弹簧座; 4.传动杆组件; 5.阀体; 6.防尘帽; 7.O型圈;
8.调节杆; 9.阀芯; 10.过滤器组件; 12.阀芯盖
1. power element; 2. regulating spring; 3. spring seat; 4. transfer bar component;
5. valve body; 6. dust cap; 7. O-type ring; 8. regulating stem; 9. value bonnet;
10. orifice(No:1#~6#); 11. fitting component; 12. orifice packing cover

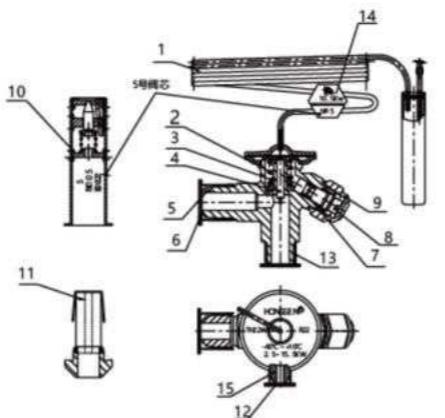

1.气箱头部件; 2.调节弹簧; 3.弹簧座; 4.传动杆组件; 5.阀体; 6.防尘帽 (4分);
7.O型圈; 8.调节杆; 9.阀芯 (1# - 6#); 11.过滤网组件; 12.防尘帽 (2分);
13.防尘帽 (3分); 14.阀芯盖; 15.外平衡接口
1. power element; 2. regulating spring; 3. spring seat; 4. transfer bar component;
5. valve body; 6. dust cap; 7. O-type ring; 8. regulating stem;
9. value bonnet; 10. orifice(No:1#~6#); 11. fitting component; 12. dust cap;
13. dust cap; 14. orifice packing cover; 15. external equaliser

可换芯选择 Replaceable element model

阀体编号 Valve element No.	名义制冷量 (TR) Nominal refrigerating capacity(TR)				名义制冷量 (KW) Nominal refrigerating capacity(KW)			
	R22/R407C	R134a	R404A/R507	R410A	R22/R407C	R134a	R404A/R507	R410A
No.1	0.7	0.5	0.45	0.8	2.5	1.8	1.6	2.9
No.2	1.0	0.8	0.6	1.2	3.5	2.6	2.1	4.1
No.3	1.5	1.3	1.2	1.8	5.2	4.6	4.2	6.1
No.4	2.3	1.9	1.7	2.6	8.0	6.7	6.0	9.4
No.5	3.0	2.5	2.2	3.5	10.5	8.6	7.7	12.3
No.6	4.5	3.0	2.6	5.3	15.5	10.5	9.1	18.2

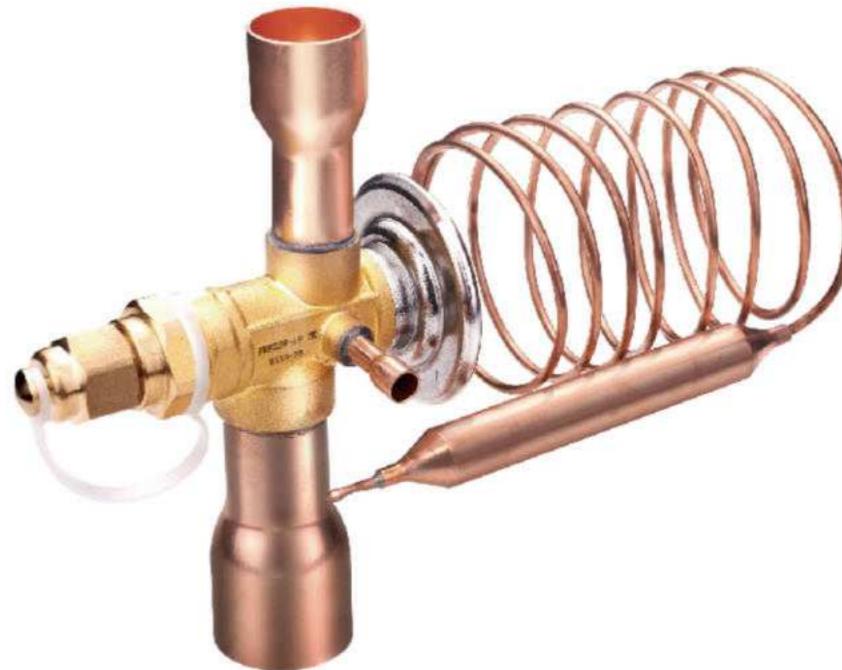FRF 型热力膨胀阀
FRF Thermostatic Expansion Valve

FRF型 (英制焊口)
Model FRF (inch ODF)

主阀体选型 Model of main value body

制冷剂 Refrigerant	型号 Model	压力平衡 Pressure Equalisation	接口螺纹 Thread		
			进口端 Inlet	出口端 Outlet	外平衡口 External Equaliser
R22/R407C	TH22	内平衡 Internal Equalisation	3/8 SAE	1/2 SAE	
R22/R407C	TH22W	外平衡 External Equalisation	3/8 SAE	1/2 SAE	1/4 SAE
R134a	TH134	内平衡 Internal Equalisation	3/8 SAE	1/2 SAE	
R134a	TH134W	外平衡 External Equalisation	3/8 SAE	1/2 SAE	1/4 SAE
R404A/R507	TH404	内平衡 Internal Equalisation	3/8 SAE	1/2 SAE	
R404A/R507	TH404W	外平衡 External Equalisation	3/8 SAE	1/2 SAE	1/4 SAE
R410A	TH410	内平衡 Internal Equalisation	3/8 SAE	1/2 SAE	
R410A	TH410W	外平衡 External Equalisation	3/8 SAE	1/2 SAE	1/4 SAE

• 名义制冷量的工况条件为：蒸发温度5°C；冷凝温度35°C；过热度3.5°C；过冷度4°C。
• Working Condition of Nominal Refrigerating Capacity: Evaporation Temperature: + 5°C; Condensation Temperature: +35°C; Superheat:3.5°C; Subcooling:4°C.


Model Selection												
制冷剂 Refrigerant	冷凝温度 (°C) Condensing Temp	型号 Model	制冷量(KW)/(TR)									
			蒸发温度(°C) Evaporation temperature									
			-35	-30	-25	-20	-15	-10	-5	0	5	
R22/R407C	40	FRF22W-3-3-5	4.99/1.43	5.69/1.63	6.43/1.84	7.2/2.06	7.98/2.28	8.75/2.5	9.49/2.71	10.17/2.91	10.72/3.06	
		FRF22W-3-4-5	4.99/1.43	5.69/1.63	6.43/1.84	7.2/2.06	7.98/2.28	8.75/2.5	9.49/2.71	10.17/2.91	10.72/3.06	
		FRF22W-4-4-7	6.68/1.91	7.63/2.18	8.63/2.47	9.68/2.77	10.75/3.07	11.81/3.37	12.83/3.67	13.76/3.93	14.52/4.15	
		FRF22W-6-4-5	9.69/2.77	11.1/3.17	12.58/3.59	14.12/4.03	15.7/4.49	17.26/4.93	18.77/5.36	20.12/5.75	21.24/6.07	
		FRF22W-6-4-7	9.69/2.77	11.1/3.17	12.58/3.59	14.12/4.03	15.7/4.49	17.26/4.93	18.77/5.36	20.12/5.75	21.24/6.07	
		FRF22W-7.5-5-7	12.00/3.43	13.86/3.96	15.84/4.53	17.89/5.11	19.97/5.71	21.03/6.01	22.98/6.57	25.72/7.35	27.1/7.74	
		FRF22W-11-5-7	19.44/5.55	22.45/6.41	25.58/7.31	28.73/8.21	31.98/9.14	34.6/9.89	37.07/10.59	38.85/11.1	39.95/11.41	
		FRF22W-11-5-9	19.44/5.55	22.45/6.41	25.58/7.31	28.73/8.21	31.98/9.14	34.6/9.89	37.07/10.59	38.85/11.1	39.95/11.41	
		FRF22W-12-5-7	19.86/5.67	22.01/6.29	25.07/7.16	28.26/8.07	31.51/9	34.25/9.79	37.91/10.83	40.11/11.46	42.61/12.17	
		FRF22W-12-5-9	19.86/5.67	22.01/6.29	25.07/7.16	28.26/8.07	31.51/9	34.25/9.79	37.91/10.83	40.11/11.46	42.61/12.17	
		FRF22W-15-5-9	22.47/6.42	25.11/7.17	28.3/8.09	31.96/9.13	35.69/10.2	38.86/11.1	41.85/11.96	51.13/14.61	54.25/15.5	
		FRF22W-15-7-9	22.47/6.42	25.11/7.17	28.3/8.09	31.96/9.13	35.69/10.2	38.86/11.1	41.85/11.96	51.13/14.61	54.25/15.5	
		FRF22W-18-7-9	25.31/7.23	28.72/8.21	33.17/9.48	38.98/11.14	45.08/12.88	49.37/14.11	53.68/15.34	58.76/16.79	63.22/18.06	
		FRF22W-18-7-11	25.31/7.23	28.72/8.21	33.17/9.48	38.98/11.14	45.08/12.88	49.37/14.11	53.68/15.34	58.76/16.79	63.22/18.06	
		FRF22W-26-7-11	36.48/10.42	42.31/12.09	48.76/13.93	55.84/15.95	63.49/18.14	71.61/20.46	79.99/22.85	88.29/25.23	92.02/26.29	
		FRF22W-26-9-11	36.48/10.42	42.31/12.09	48.76/13.93	55.84/15.95	63.49/18.14	71.61/20.46	79.99/22.85	88.29/25.23	92.02/26.29	
		FRF22W-30-7-11	41.30/11.80	47.93/13.69	55.26/15.79	63.29/18.08	71.98/20.57	81.2/23.2	90.69/25.91	100.1/28.6	104.8/29.94	
		FRF22W-30-9-11	41.30/11.80	47.93/13.69	55.26/15.79	63.29/18.08	71.98/20.57	81.2/23.2	90.69/25.91	100.1/28.6	104.8/29.94	
		FRF22W-38-9-11	48.63/13.89	55.75/15.93	64.95/18.56	75.29/21.51	86.78/24.79	99.3/28.37	111.5/31.86	123.7/35.34	134.7/38.49	
R404A/R507	40	FRF404W-4-4-5	4.1/1.17	4.71/1.35	5.38/1.54	6.09/1.74	6.84/1.95	7.62/2.18	8.39/2.4	9.11/2.6	9.73/2.78	
		FRF404W-5-5-7	5.1/1.46	5.71/1.63	6.48/1.85	7.59/2.17	8.84/2.53	9.52/2.72	10.39/2.97	11.36/3.25	12.28/3.51	
		FRF404W-7.5-5-7	7.55/2.16	8.71/2.49	10.1/2.89	11/3.14	12.94/3.7	14/4	15.55/4.44	16.5/4.71	17.97/5.13	
		FRF404W-9-5-7	9.57/2.73	10.98/3.14	12.51/3.57	14.14/4.04	15.83/4.52	17.53/5.01	19.18/5.48	20.7/5.91	21.98/6.28	
		FRF404W-11-5-9	12.07/3.45	13.93/3.98	15.92/4.55	18.02/5.15	20.16/5.76	22.29/6.37	24.28/6.94	25.98/7.42	27.21/7.77	
		FRF404W-13-7-9	12.93/3.69	15.1/4.31	17.1/4.89	19/5.43	22.1/6.31	25.05/7.16	27.1/7.74	30.55/8.73	32.17/9.19	
		FRF404W-18-7-11	16.59/4.74	19.54/5.58	22.27/6.36	25.13/7.18	29.03/8.29	32.94/9.41	36.69/10.48	40.27/11.51	43.57/12.45	
		FRF404W-21-7-11	26.03/7.44	29.79/8.51	33.77/9.65	37.87/10.82	41.93/11.98	45.77/13.08	49.21/14.06	52.06/14.87	54.14/15.47	
		FRF404W-26-9-11	24.64/7.04	28.59/8.17	33.03/9.44	37.91/10.83	43.18/12.34	48.69/13.91	54.28/15.51	59.71/17.06	64.74/18.5	
R410A	40	FRF410W-3.5-3-5	5.93/1.69	6.73/1.91	7.57/2.15	8.45/2.40	9.35/2.66	10.25/2.92	11.12/3.16	11.91/3.39	12.56/3.57	
		FRF410W-4.5-4-7	7.92/2.25	9.0/2.56	10.15/2.89	11.35/3.23	12.58/3.58	13.81/3.93	15.01/4.27	16.10/4.58	17.00/4.84	
		FRF410W-6.5-4-7	11.48/3.27	13.07/3.72	14.76/4.20	16.51/4.70	18.32/5.21	20.13/5.73	21.88/6.22	23.48/6.68	24.80/7.05	
		FRF410W-9-5-7	15.36/4.37	17.49/4.97	19.73/5.61	22.06/6.27	24.44/6.95	26.81/7.63	29.08/8.27	31.13/8.85	32.77/9.32	
		FRF410W-13-5-7	23.1/6.57	26.50/7.54	30.02/8.54	33.57/9.55	37.07/10.54	40.36/11.48	43.27/12.31	45.56/12.96	46.97/13.36	
		FRF410W-15-5-7	23.01/6.54	26.51/7.54	30.31/8.62	34.40/9.78	38.74/11.02	43.25/12.30	47.80/13.59	52.15/14.83	55.98/15.92	
		FRF410W-19-5-9	28.36/8.07	32.73/9.31	37.49/10.66	42.64/12.13	48.14/13.69	53.89/15.33	59.72/16.99	65.36/18.59	70.41/20.03	
		FRF410W-23-7-9	34.74/9.88	39.94/11.36	45.52/12.95	51.47/14.64	57.75/16.42	64.27/18.28	70.84/20.15	77.13/21.94	82.66/23.51	
		FRF410W-31-7-11	44.23/12.58	51.02/14.51	58.50/16.64	66.71/18.97	75.60/21.50	85.08/24.20	94.91/26.99	104.70/29.78	113.70/32.34	
		FRF410W-35-7-11	50.06/14.24	57.76/16.43	66.26/18.85	75.58/21.50	85.67/24.37	96.41/27.42	107.50/30.57	118.60/33.73	128.80/36.63	
		FRF410W-46-9-11	61.44/17.47	71.40/20.31	82.66/23.51							

产品参数 Product Parameters

制冷剂 Refrigerant	型号 Model	压力平衡 Pressure Equalisation	接口螺纹 (接口尺寸) Thread Connection Size		
			进口端 Inlet 英制 inch	出口端 Outlet 英制 inch	外平衡口 External Equaliser
R404A	FRF404W-4-4-5	外平衡 External Equalisation	1/2" ODF	5/8" ODF	
	FRF404W-5-5-7		5/8" ODF	7/8" ODF	
	FRF404W-7.5-5-7		5/8" ODF	7/8" ODF	
	FRF404W-9-5-7		5/8" ODF	7/8" ODF	
	FRF404W-11-5-9		5/8" ODF	1-1/8" ODF	
	FRF404W-13-7-9		7/8" ODF	1-1/8" ODF	
	FRF404W-18-7-11		7/8" ODF	1-3/8" ODF	
	FRF404W-21-7-11		7/8" ODF	1-3/8" ODF	
	FRF404W-26-9-11		1-1/8" ODF	1-3/8" ODF	
	FRF410W-3.5-3-5		3/8" ODF	5/8" ODF	
R507	FRF410W-4.5-4-7	外平衡 External Equalisation	1/2" ODF	7/8" ODF	
	FRF410W-6.5-4-7		1/2" ODF	7/8" ODF	
	FRF410W-9-5-7		1/2" ODF	7/8" ODF	
	FRF410W-13-5-7		5/8" ODF	7/8" ODF	
	FRF410W-15-5-7		5/8" ODF	7/8" ODF	
	FRF410W-19-5-9		5/8" ODF	1-1/8" ODF	
	FRF410W-23-7-9		7/8" ODF	1-1/8" ODF	
	FRF410W-31-7-11		7/8" ODF	1-3/8" ODF	
	FRF410W-35-7-11		7/8" ODF	1-3/8" ODF	
	FRF410W-46-9-11		1-1/8" ODF	1-3/8" ODF	
	FRF407W-3.5-4-7		1/2" ODF	7/8" ODF	
	FRF407W-5-4-7		1/2" ODF	7/8" ODF	
	FRF407W-7-5-7		5/8" ODF	7/8" ODF	
	FRF407W-10-5-7		5/8" ODF	7/8" ODF	
	FRF407W-12-5-9		5/8" ODF	1-1/8" ODF	
	FRF407W-15-7-9		7/8" ODF	1-1/8" ODF	
	FRF407W-18-7-11		7/8" ODF	1-3/8" ODF	

* 名义制冷量的工况条件为：蒸发温度te= + 5°C 冷凝温度tK= + 40°C 过冷度2°C
 * Working Condition of Nominal Refrigerating Capacity: Evaporation Temperature: + 5°C; Condensation Temperature: +40°C; Superheat:3.5°C; Subcooling:2°C.

结构 Structure

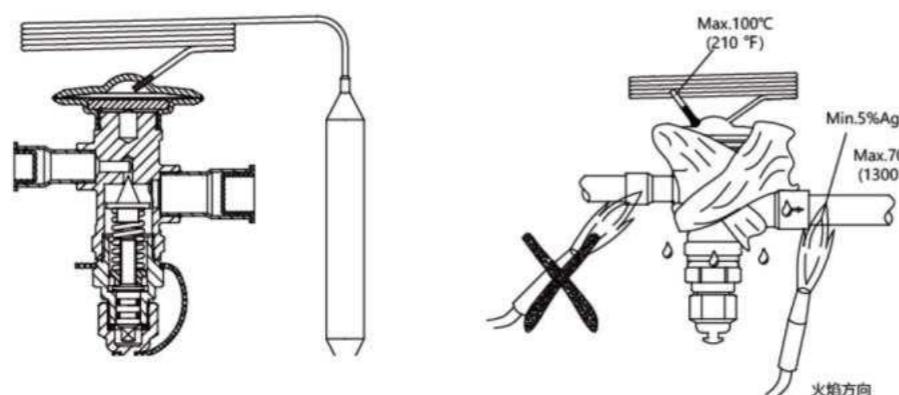

ERF ERFW 型热力膨胀阀

ERF ERFW Thermostatic Expansion Valve



ERF型 (公制/英制螺口)
Model ERF (metric/inch flare)



ERFW型 (英制螺口)
Model ERFW (inch flare)

产品概述 Product Description

• ERF、ERFW型热力膨胀阀用于调节蒸发器的液体制冷剂的供给量，可提供多种制冷剂及其各种工况下的充注，能满足冷藏设备、制冰机、除湿机以及各种蒸发温度范围内的制冷和空调的要求。

• Model ERF/ERFW thermal expansion valve are used to adjust the liquid refrigerant supply volume to the evaporator and they are suitable to various refrigerants and different charging condition. It meets the requirements of the cold storage facility, ice maker and dehumidifier as well as the refrigeration and air conditioning requirements under varied evaporation temperature.

特点 Features

- | | |
|------------------------------------|--|
| • 采用大动力头结构模式，线性优良，过热度调节性能稳定。 | • The big power head structure with perfect linear performance has a stable adjustment on the degree of superheat. |
| • 采用新型结构，蒸发温度范围大，低温工作幅值大。 | • New structure has large scope of evaporation temperature and big work amplitude under low temperature. |
| • 具有专利技术，膜片动作迟滞 < 0.5k，阀门具有良好的稳定性。 | • With proprietary technology, the diaphragm movement hysteresis < 0.5k and the valve has good stability. |
| • 阀帽采用防呆设计，防止其丢失，保证二次密封可靠性。 | • The bonnet features fool-proofing design to prevent loss and ensure the reliability of sealing. |

技术参数 Technical Parameters


适用制冷剂 Applicable Refrigerants:	R404A,R22/R407C,R134a 冷媒等介质
适用介质温度 Applicable Medium Temperature:	-40°C ~ +10°C
名义容量 Norminal Capacity:	3.5KW~158KW
过热度调节范围 Adjustable Range of Superheat:	2°C~8°C
出厂静热度调定值 Ex-Works Static Heat Adjustment:	3.5°C
外均端泄露量 Outer Equilibrium End Leakage:	≤75ml/min
最大工作压力 Maximum Working Pressure:	2.8MPa
最大测试压力 Maximum Testing Pressure:	3.2MPa

- ERF (ERFW) 和ERF型膨胀阀包括2种接口：螺口 (Flare) 和焊口 (ODF)。
- Model ERF (ERFW) and FRF thermostatic expansion valve have two types of connection: Flare/ODF.
- ERF (ERFW) 和ERF型膨胀阀毛细管长度：标准1.5m, (φ10 - φ13是3m)，特殊情况可按用户要求。
- Capillary length of Model ERF (ERFW) and FRF thermostatic expansion valve can be standard 1.5 m, (φ10~ 13 is 3m) or customized.

造型表 Model Selection								
制冷剂 Refrigerant	型号 Model	压力平衡 Pressure Equalisation	接口螺纹 (接口尺寸) Thread(Connection Size)			名义制冷量 Nominal Refrigerating Capacity		
			进口端 Inlet		出口端 Outlet		外平衡口 External Equaliser	冷吨 TR
			公制 metric	英制 inch	公制 metric	英制 inch	公制 metric	
R22/R407C	ERF22-Φ1.0	内平衡 (螺口) Internal Equalisation(flare)	M16X1.5	M18X1.5	M22X1.5	M18X1.5	M22X1.5	1.0
	ERF22-Φ1.5							3.5
	ERF22-Φ2.0							4840
	ERF22-Φ2.5							6048
	ERF22-Φ3.0							7560
	ERF22-Φ4.0			M18X1.5	M22X1.5	M18X1.5	M22X1.5	3.0
	ERF22-Φ5.0							10.5
	ERF22-Φ6.0							15120
	ERF22-Φ7.0							18144
	ERF22-Φ8.0							22680
R134a	ERF134-Ø1.0	外平衡 External Equalisation	3/8 SAE	1/2 SAE	5/8 SAE	1/2 SAE	5/8 SAE	8.5
	ERF134-Ø1.5							29.9
	ERF134-Ø2.0							25704
	ERF134-Ø2.5							42.2
	ERF134-Ø3.0							36288
	ERF134-Ø4.0			1/4 SAE	3/8 SAE	1/2 SAE	5/8 SAE	12.0
	ERF134-Ø5.0							45360
	ERF134-Ø7.0							52.7
	ERF134-Ø9.0							45360
	ERF22W-Ø1.0							3.5
R22/R407C	ERF22W-Ø1.5	外平衡 External Equalisation	3/8 SAE	1/2 SAE	5/8 SAE	1/2 SAE	5/8 SAE	1.0
	ERF22W-Ø2.0							5.6
	ERF22W-Ø2.5							6048
	ERF22W-Ø3.0							7560
	ERF22W-Ø4.0							10.5
	ERF22W-Ø5.0			1/4 SAE	3/8 SAE	1/2 SAE	5/8 SAE	15.0
	ERF22W-Ø6.0							17.6
	ERF22W-Ø7.0							21.0
	ERF22W-Ø8.0							26.5
	ERF22W-Ø9.0							29.9
R134a	ERF134W-Ø1.0	外平衡 External Equalisation	3/8 SAE	1/2 SAE	5/8 SAE	1/2 SAE	5/8 SAE	8.5
	ERF134W-Ø1.5							29.9
	ERF134W-Ø2.0							25704
	ERF134W-Ø2.5							42.2
	ERF134W-Ø3.0							36288
	ERF134W-Ø4.0			1/4 SAE	3/8 SAE	1/2 SAE	5/8 SAE	12.0
	ERF134W-Ø5.0							45360
	ERF134W-Ø7.0							52.7
	ERF134W-Ø9.0							45360


* 名义制冷量的工况条件为：蒸发温度te = + 5°C 冷凝温度tK = + 40°C 过冷度2°C
 * Working Condition of Nominal Refrigerating Capacity: Evaporation Temperature te = + 5°C;
 Condensation Temperature tK = +40°C; Degree of Superheat 2°C

结构 Structure

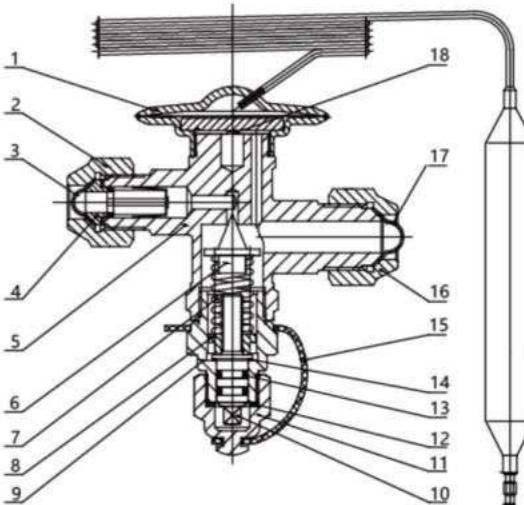

ERF型 (公制螺口) Model ERF(metric flare)

1. 气箱头部件; 2. 纳子; 3. 封帽; 4. 过滤网部件;
 5. 阀体; 6. 阀芯; 7. 调节弹簧; 8. 调节螺母; 9. 调节座; 10. 阀杆; 11. 阀帽; 12. 密封圈; 13. O形圈; 14. 形圈; 15. 密封垫; 16. 公制纳子; 17. 封帽; 18. 传动杆
 1. power element; 2. nut; 3. seal cap; 4. filtering component; 5. valve body; 6. valve element; 7. adjusting spring; 8. adjusting nut; 9. adjusting seat; 10. valve stem; 11. bonnet; 12. seal ring; 13. O-ring; 14. gasket; 15. security belt; 16. metric nut; 17. seal cap; 18. drive pin

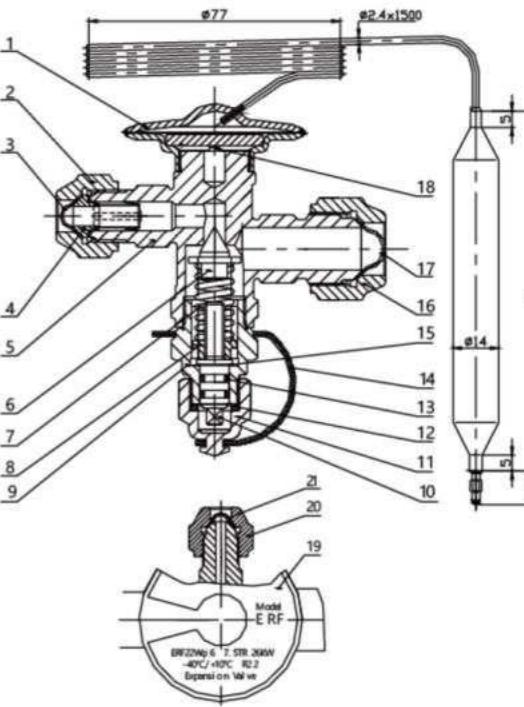

ERFW型 (英制螺口) Model ERFW(inch flare)

1. 气箱头部件 power element 12. 密封圈 seal ring
 2. 纳子 nut 13. O形圈 O-ring
 3. 封帽 seal cap 14. 保险带 security belt
 4. 过滤网部件 filtering component 15. 密封垫 gasket
 5. 阀体 valve body 16. 纳子 nut
 6. 阀芯 valve element 17. 封帽 seal cap
 7. 调节弹簧 adjusting spring 18. 传动杆 drive pin
 8. 调节螺母 adjusting nut 19. 标贴 label
 9. 调节座 adjusting seat 20. 纳子 nut
 10. 阀杆 valve stem 21. 封帽 seal cap
 11. 阀帽 bonnet
 1. 气箱头部件 power element 12. 密封圈 seal ring
 2. 纳子 nut 13. O形圈 O-ring
 3. 封帽 seal cap 14. 保险带 security belt
 4. 过滤网部件 filtering component 15. 密封垫 gasket
 5. 阀体 valve body 16. 纳子 nut
 6. 阀芯 valve element 17. 封帽 seal cap
 7. 调节弹簧 adjusting spring 18. 传动杆 drive pin
 8. 调节螺母 adjusting nut 19. 标贴 label
 9. 调节座 adjusting seat 20. 纳子 nut
 10. 阀杆 valve stem 21. 封帽 seal cap
 11. 阀帽 bonnet
 1. 气箱头部件 power element 12. 密封圈 seal ring
 2. 纳子 nut 13. O形圈 O-ring
 3. 封帽 seal cap 14. 保险带 security belt
 4. 过滤网部件 filtering component 15. 密封垫 gasket
 5. 阀体 valve body 16. 纳子 nut
 6. 阀芯 valve element 17. 封帽 seal cap
 7. 调节弹簧 adjusting spring 18. 传动杆 drive pin
 8. 调节螺母 adjusting nut 19. 标贴 label
 9. 调节座 adjusting seat 20. 纳子 nut
 10. 阀杆 valve stem 21. 封帽 seal cap
 11. 阀帽 bonnet
 1. 气箱头部件 power element 12. 密封圈 seal ring
 2. 纳子 nut 13. O形圈 O-ring
 3. 封帽 seal cap 14. 保险带 security belt
 4. 过滤网部件 filtering component 15. 密封垫 gasket
 5. 阀体 valve body 16. 纳子 nut
 6. 阀芯 valve element 17. 封帽 seal cap
 7. 调节弹簧 adjusting spring 18. 传动杆 drive pin
 8. 调节螺母 adjusting nut 19. 标贴 label
 9. 调节座 adjusting seat 20. 纳子 nut
 10. 阀杆 valve stem 21. 封帽 seal cap
 11. 阀帽 bonnet
 1. 气箱头部件 power element 12. 密封圈 seal ring
 2. 纳子 nut 13. O形圈 O-ring
 3. 封帽 seal cap 14. 保险带 security belt
 4. 过滤网部件 filtering component 15. 密封垫 gasket
 5. 阀体 valve body 16. 纳子 nut
 6. 阀芯 valve element 17. 封帽 seal cap
 7. 调节弹簧 adjusting spring 18. 传动杆 drive pin
 8. 调节螺母 adjusting nut 19. 标贴 label
 9. 调节座 adjusting seat 20. 纳子 nut
 10. 阀杆 valve stem 21. 封帽 seal cap
 11. 阀帽 bonnet
 1. 气箱头部件 power element 12. 密封圈 seal ring
 2. 纳子 nut 13. O形圈 O-ring
 3. 封帽 seal cap 14. 保险带 security belt
 4. 过滤网部件 filtering component 15. 密封垫 gasket
 5. 阀体 valve body 16. 纳子 nut
 6. 阀芯 valve element 17. 封帽 seal cap
 7. 调节弹簧 adjusting spring 18. 传动杆 drive pin
 8. 调节螺母 adjusting nut 19. 标贴 label
 9. 调节座 adjusting seat 20. 纳子 nut
 10. 阀杆 valve stem 21. 封帽 seal cap
 11. 阀帽 bonnet
 1. 气箱头部件 power element 12. 密封圈 seal ring
 2. 纳子 nut 13. O形圈 O-ring
 3. 封帽 seal cap 14. 保险带 security belt
 4. 过滤网部件 filtering component 15. 密封垫 gasket
 5. 阀体 valve body 16. 纳子 nut
 6. 阀芯 valve element 17. 封帽 seal cap
 7. 调节弹簧 adjusting spring 18. 传动杆 drive pin
 8. 调节螺母 adjusting nut 19. 标贴 label
 9. 调节座 adjusting seat 20. 纳子 nut
 10. 阀杆 valve stem 21. 封帽 seal cap
 11. 阀帽 bonnet
 1. 气箱头部件 power element 12. 密封圈 seal ring
 2. 纳子 nut 13. O形圈 O-ring
 3. 封帽 seal cap 14. 保险带 security belt
 4. 过滤网部件 filtering component 15. 密封垫 gasket
 5. 阀体 valve body 16. 纳子 nut
 6. 阀芯 valve element 17. 封帽 seal cap
 7. 调节弹簧 adjusting spring 18. 传动杆 drive pin
 8. 调节螺母 adjusting nut 19. 标贴 label
 9. 调节座 adjusting seat 20. 纳子 nut
 10. 阀杆 valve stem 21. 封帽 seal cap
 11. 阀帽 bonnet
 1. 气箱头部件 power element 12. 密封圈 seal ring
 2. 纳子 nut 13. O形圈 O-ring
 3. 封帽 seal cap 14. 保险带 security belt
 4. 过滤网部件 filtering component 15. 密封垫 gasket
 5. 阀体 valve body 16. 纳子 nut
 6. 阀芯 valve element 17. 封帽 seal cap
 7. 调节弹簧 adjusting spring 18. 传动杆 drive pin
 8. 调节螺母 adjusting nut 19. 标贴 label
 9. 调节座 adjusting seat 20. 纳子 nut
 10. 阀杆 valve stem 21. 封帽 seal cap
 11. 阀帽 bonnet
 1. 气箱头部件 power element 12. 密封圈 seal ring
 2. 纳子 nut 13. O形圈 O-ring
 3. 封帽 seal cap 14. 保险带 security belt
 4. 过滤网部件 filtering component 15. 密封垫 gasket
 5. 阀体 valve body 16. 纳子 nut
 6. 阀芯 valve element 17. 封帽 seal cap
 7. 调节弹簧 adjusting spring 18. 传动杆 drive pin
 8. 调节螺母 adjusting nut 19. 标贴 label
 9. 调节座 adjusting seat 20. 纳子 nut

QRF 型热力膨胀阀

QRF Thermostatic Expansion Valve



QRF型 (英制螺口)
Model QRF (inch flare)

产品概述 Product Description

- QRF134aW型膨胀阀用于调节蒸发器中液体制冷剂的供给量
- QRF134aW型膨胀阀具有双向节流功能，被广泛运用在热泵、汽车空调制冷系统

- QRF134aW expansion Valve used for regulating the supply of liquid refrigerant in Evaporator.
- QRF134aW expansion valve with two-way throttling function is widely used in heat pump, Automotive air conditioning and refrigeration system

特点 Features

- 膨胀阀膜片采用知名供应商同一材料。
- 可提供MOP功能，可使压缩机电机不会因过高的蒸发压力而损伤。
- 具有发明专利的膜片结构，大大改善了低温下的工作性能。
- 阀帽采用二次密封结构，确保外泄漏为零。

- The expansion valve diaphragm is made of the same material as the well-known supplier.
- MOP function can be provided, so that the compressor motor will not be damaged by excessive evaporation pressure.
- The patented membrane structure greatly improves the working performance at low temperature.
- The valve bonnet adopts secondary sealing structure to ensure zero external leakage.

技术参数 Technical Parameters

适用制冷剂 Applicable Refrigerants R134a

适用介质温度 Applicable Medium -30°C~+10°C

过热度调节范围 Adjustable Range of Superheat 2°C~8°C

最大工作压力 Maximum Working Pressure 2.8MPa

最大测试压力 Maximum Testing Pressure 3.2MPa

QREF型热力膨胀阀毛细管长度：标准1.5m,特殊情况可按用户需求。
QREF type thermal expansion valve capillary length: standard 1.5m, special circumstances can be according to user demand.




选型表 Model Selection

制冷剂 Refrigerant	型号 Model	压力平衡 Pressure Equalisation	接口螺纹 Thread			名义制冷量 Nominal Refrigerating Capacity	
			进口端Inlet	出口端Outlet	外平衡口 External Equaliser	TR	KW
R134a	QRF134aW-2.5-3-4	外平衡 External Equalisation	3/8 SAE	1/2 SAE	1/4 SAE	2.5	8
	QRF134aW-3.5-3-4		3/8 SAE	1/2 SAE		3.5	12
	QRF134aW-4.5-5-6		5/8SAE	3/4SAE		4.5	17
	QRF134aW-7-5-6		5/8SAE	3/4SAE		7	24
	QRF134aW-10-5-6		5/8SAE	3/4SAE		10	37

• 名义制冷量的工况条件为：蒸发温度5°C 冷凝温度35°C 过热度3.5°C 过冷度4°C

• The working condition of nominal refrigerating capacity is: evaporation temperature: 5°C; condensation temperature: 35°C; superheat: 3.5°C; supercooling degree: 4°C.

结构 Structure

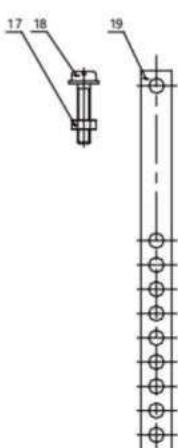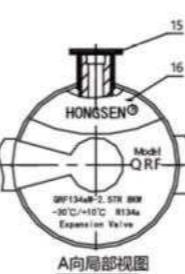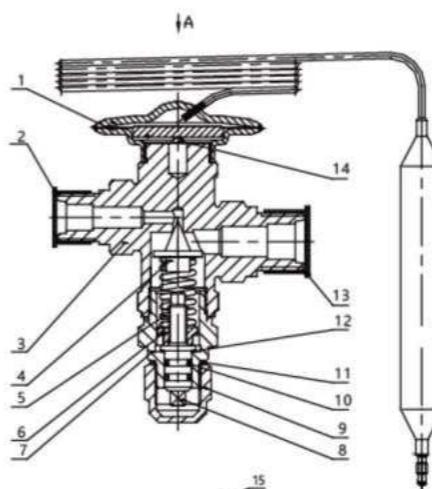

1. 气箱头部件；2. 防尘帽；3. 阀体；4. 阀芯；5. 调节弹簧；6. 调节螺母；7. 调节座；8. 阀杆；9. 阀帽；10. O型圈；11. 垫片；12. 密封垫；13. 防尘帽；14. 传动杆；15. 防尘帽；16. 标贴；17. 螺母；18. 螺钉；19. 抱箍

1. power element; 2. dust cap; 3. valve body; 4. spool; 5. adjusting spring; 6. adjusting nut; 7. adjusting seat; 8. valve stem; 9. valve bonnet; 10. O-ring; 11. gasket; 12. gasket; 13. dust cap; 14. drive pin; 15. dust cap; 16. label; 17. nut; 18. bolt; 19. hoop


球阀系列

BALL VALVE

Series

适用于双向流动,用于冷冻、冷藏和空气调节装置的液体、暖气和热气管路上,阀座与密封处具有很好的密封性。
配有一个带二次密封的密封帽。

Suitable for bidirectional flow, used in refrigeration,
refrigeration and air conditioning devices of liquid, heating
and heat pipes, seats and seals have good sealing.
Equipped with a sealed cap with a secondary seal.

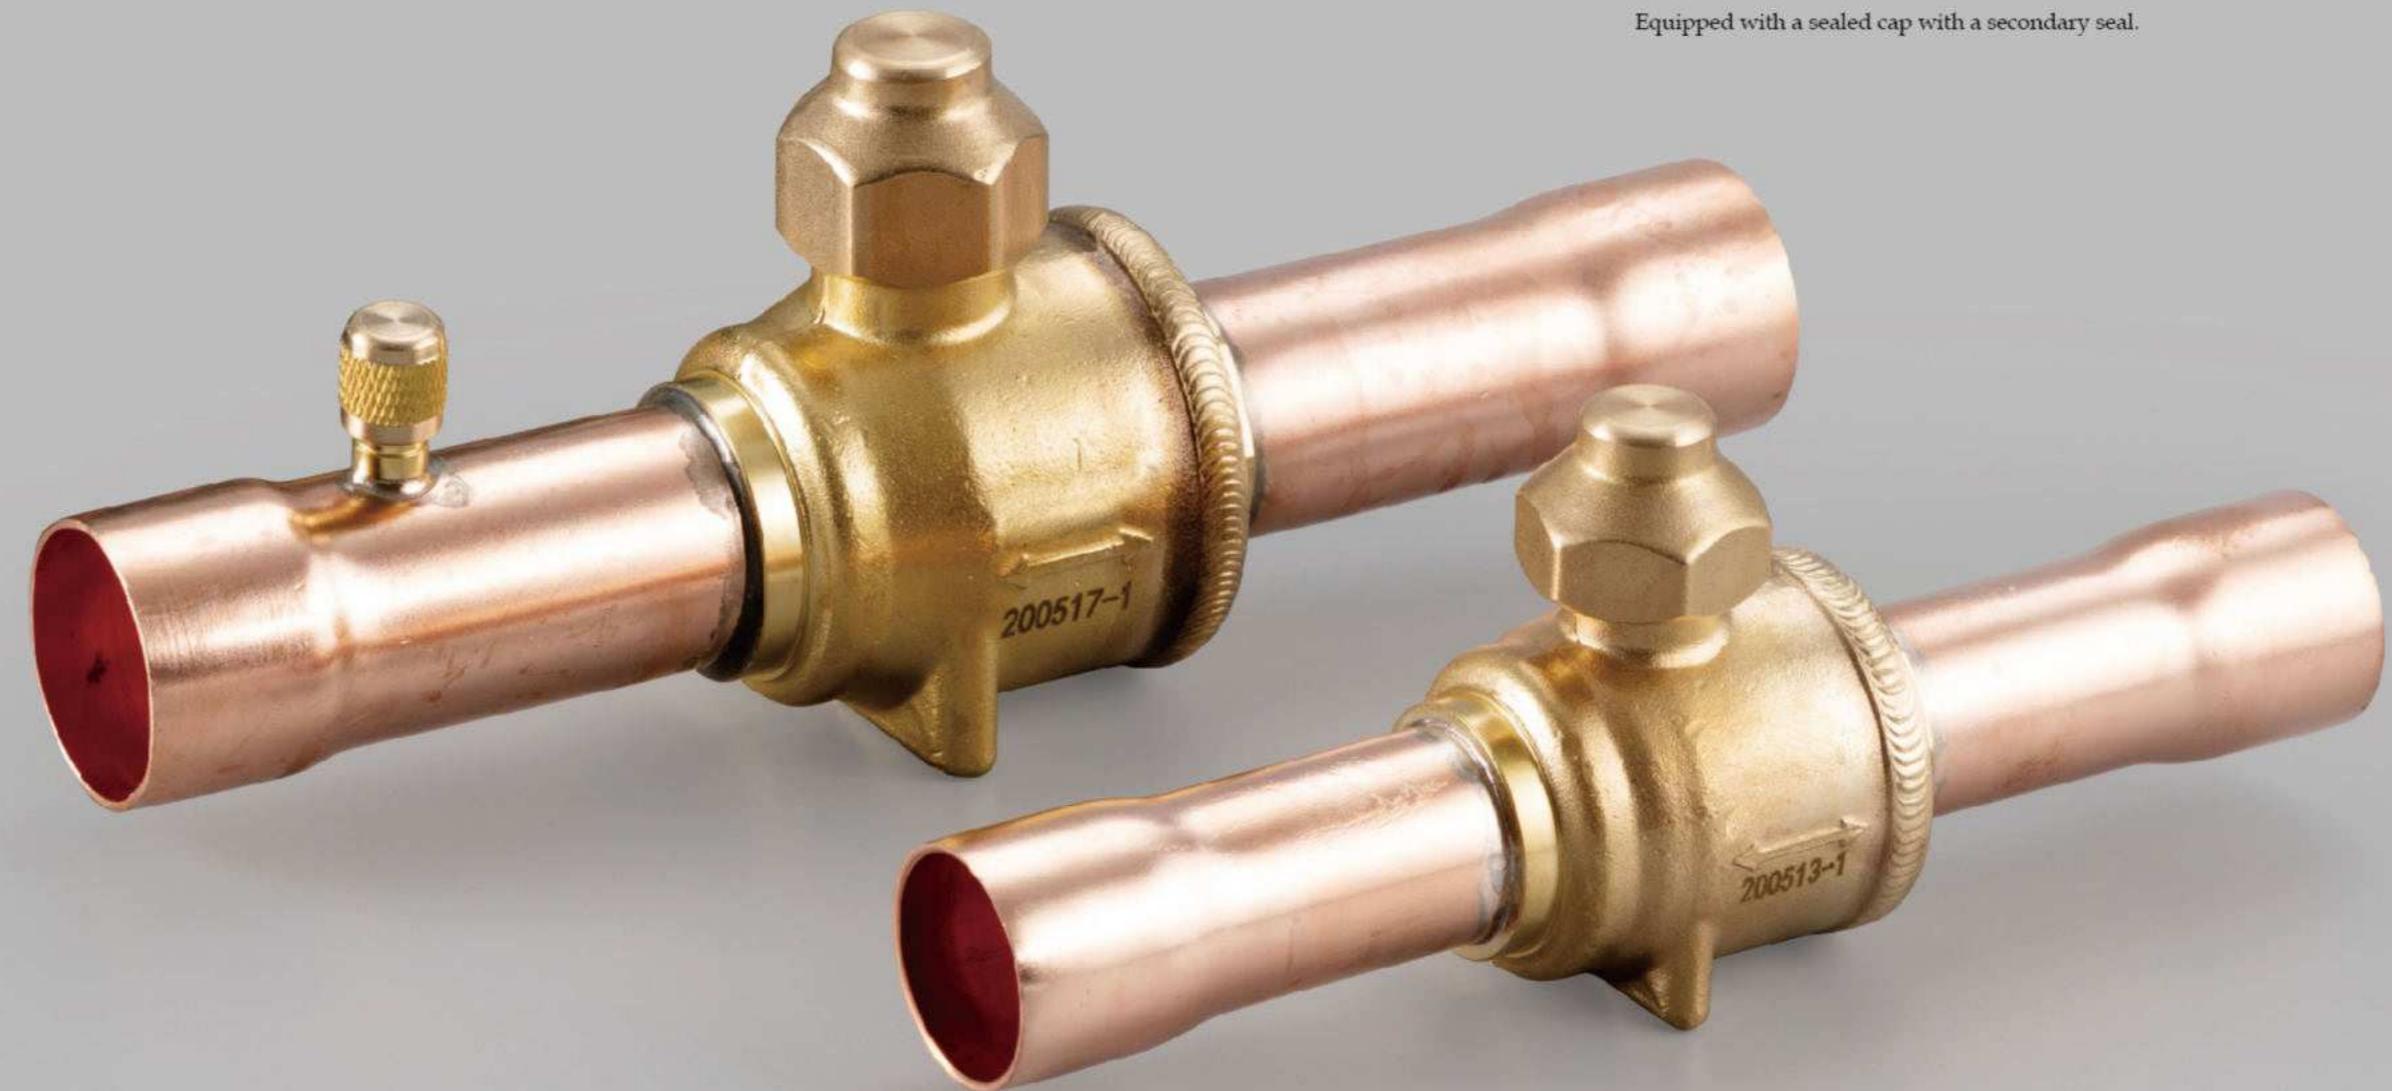

DQF型电动球阀 DQF type electric ball valve



产品概述 Product Description

- DQF型球阀是电动调节的截止阀，适用于双向流动；
 - DQF型球阀用于冷冻、冷藏和空调装置的液体、吸气和热气管路上；
 - DQF型球阀的阀座与密封处具有很好的密封性；
 - DQF型球阀为直通型，可提供最大的流量，同时该阀的工作温度范围宽；
 - DQF型球阀带电动驱动装置，可实现远程控制。
- DQF ball valve is a shut-off valve for electric adjustment, which is suitable for bi-flow direction; DQF ball valve can be used on the liquid, air suction and hot vapor pipelines of the refrigeration, cold storage and air condensation facilities. The DQF ball valve has a good sealing performance at the seat. The DQF ball valve has a direct pass, which provides the maximum flow. Meanwhile, it has wide working temperature range. DQF ball valve can help to achieve remote control with an electric driver.

特点 Features

- | | |
|-------------------------------|---|
| • 全开和全关通过电动驱动器自动控制
且均有旋转限位 | • 具有双向流动性
• 氧弧焊接结构，强度高。 |
| • 断电可手动调节 | • 防爆阀杆设计，安全性好 |
| • 超低运行噪音 | • 改性PTFE密封，密封可靠 |
| • 流动无压降 | • Full open/close can be realized automatically through the driver, rotating limit pin applied. |
| • 从全开到全关只需转动1/4圈 | • Manual adjustment available when power off |
| | • Ultra-low running noise |
| | • No flowing pressure drop |
| | • A 1/4 circle rotating to realize full open/close |
| | • Bi-flow direction |
| | • Arc welding structure, high strength. |
| | • Explosion-proof design on valve stem, additional safety |
| | • Modified PTFE sealing, reliable sealing |

技术参数 Technical Parameters

适用介质: HCFC、HFC	Applicable medium: HCFC, HFC
适用介质温度: -40°C ~ +120°C	Applicable medium temperature: -40 °C ~ +120 °C
最大工作压力: 4.5MPa	Maximum work pressure: 4.5MPa
最大耐压压力: 6.5MPa	Maximum pressure resistance: 6.5MPa

DQF球阀选型表 Model Selection



型号 Model	规格 Size	通径 OD(mm)	Kv值(m³/h)	扭矩 (N.m) Torque	动作时间(S) Running time	配套驱动器 Driver
DQF10	3/8 (φ10)	φ14	5.7	5	20	HS/HVD24-5Q
DQF12	1/2 (φ12)	φ14	10.6	5	20	
DQF16	5/8 (φ16)	φ14	14.1	5	20	
DQF19	3/4 (φ19)	φ16	20.4	5	20	HS/HVD24-10Q
DQF22	7/8 (φ22)	φ19	28.2	10	20	
DQF28	1-1/8 (φ28)	φ25	52	10	20	
DQF35	1-3/8 (φ35)	φ31	80	20	20	HS/HVD24-20Q
DQF42	1-5/8 (φ42)	φ37	121	40	20	
DQF54	2-1/8 (φ54)	φ50	200	40	20	
DQF67	2-5/8 (φ67)	φ50	200	40	20	
DQF79	3-1/8 (φ79)	φ50	200	40	20	HS/HVD24-40Q

电动驱动器选型表 Model selection for Motor driver


型号 Model	旋转角 Rotating ang	扭矩 Torque	动作时间 Running time	额定电压 (V) Voltage	功率(W) Power	防护等级 Saterproof level	噪音 Noise	重量(kg) Weight
HS/HVD24-5Q	90°	5	20	AC/DC24V 50/60Hz	运行Running 3.0W 待机Standby 0.5W	IP54	55db	1.1
HS/HVD24-10Q	90°	10	20	AC/DC24V 50/60Hz	运行 Running 4.5W 待机 Standby 0.5W			1.1
HS/HVD24-20Q	90°	20	20	AC/DC24V 50/60Hz	运行 Running 8.0W 待机 Standby 0.5W			1.4
HS/HVD24-40Q	90°	40	20	AC/DC24V 50/60Hz	运行 Running 15W 待机 Standby 3.0W			1.5

接线图 Wiring

开关型接线表

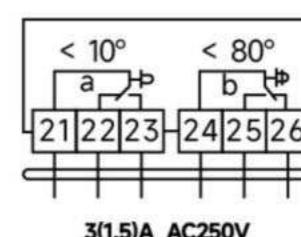
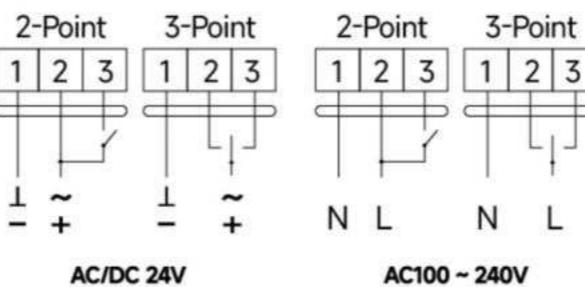


适用于	HS-HVD24S-5Q	HS-HVD230S-5Q
HS-HVD24S-10Q	HS-HVD230S-10Q	
HS-HVD24S-20Q	HS-HVD230S-20Q	
HS-HVD24S-40Q	HS-HVD230S-40Q	
HS-HVD24S-5UQ	HS-HVD230S-5UQ	
HS-HVD24S-8UQ	HS-HVD230S-8UQ	

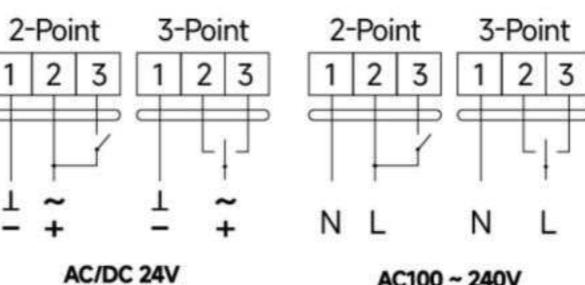


适用于	HS-HVD24-5Q	HS-HVD230-5Q
HS-HVD24-10Q	HS-HVD230-10Q	
HS-HVD24-20Q	HS-HVD230-20Q	
HS-HVD24-40Q	HS-HVD230-40Q	
HS-HVD24-5UQ	HS-HVD230-5UQ	
HS-HVD24-8UQ	HS-HVD230-8UQ	


模拟型接线表

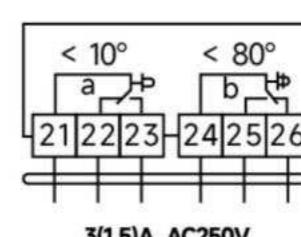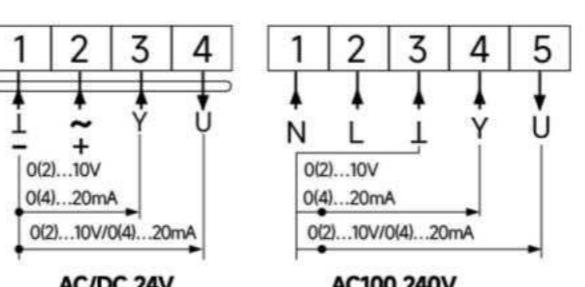

适用于	HS-HVA24S-5Q	HS-HVA230S-5Q
HS-HVA24S-10Q	HS-HVA230S-10Q	
HS-HVA24S-20Q	HS-HVA230S-20Q	
HS-HVA24S-40Q	HS-HVA230S-40Q	
HS-HVA24S-5UQ	HS-HVA230S-5UQ	
HS-HVA24S-8UQ	HS-HVA230S-8UQ	

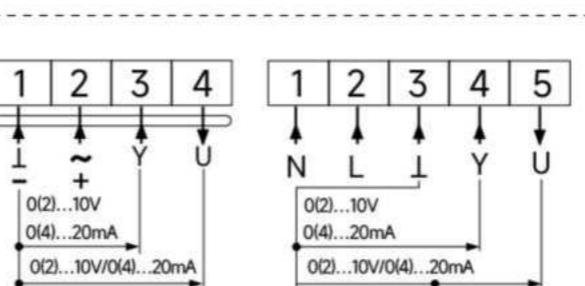

适用于	HS-HVA24-5Q	HS-HVA230-5Q
HS-HVA24-10Q	HS-HVA230-10Q	
HS-HVA24-20Q	HS-HVA230-20Q	
HS-HVA24-40Q	HS-HVA230-40Q	
HS-HVA24-5UQ	HS-HVA230-5UQ	
HS-HVA24-8UQ	HS-HVA230-8UQ	

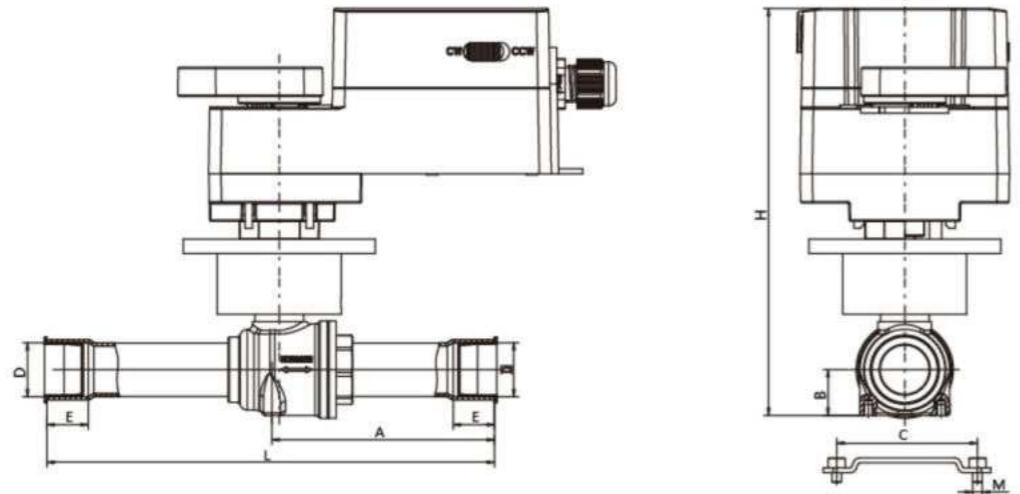

型号 Model	外形尺寸 Overall Dimension							
	D	L	E	H	A	B	C	M
DQF10	$\varphi 10.1^{+0.20}_0$	138	8	139	75	15	50	M4
DQF12	$\varphi 12.8^{+0.20}_0$	159	10	139	83	15	50	M4
DQF16	$\varphi 16.1^{+0.20}_0$	159	12	139	83	15	50	M4
DQF19	$\varphi 19.1^{+0.20}_0$	185	14	145	100.5	16.5	58	M4
DQF22	$\varphi 22.3^{+0.20}_0$	184	17	168	99	19	58	M4
DQF28	$\varphi 28.7^{+0.20}_0$	208	20	191	112	24	66	M4
DQF35	$\varphi 35.2^{+0.20}_0$	251	25	211	135	30	80	M6
DQF42	$\varphi 41.5^{+0.20}_0$	280	28	222.5	150.5	35	87	M6
DQF54	$\varphi 54.2^{+0.20}_0$	305	34	242	166.5	45.5	106	M6
DQF67	$\varphi 66.8^{+0.20}_0$	306	37	242	167	45.5	106	M6
DQF79	$\varphi 79.6^{+0.20}_0$	305	41	242	166.5	45.5	106	M6


It is not consciousness that determines life, but life that determines consciousness.

— Marx and Engels in Germany (philosopher, thinker)

不是意识决定生活，而是生活决定意识。

— 德国的马克思&恩格斯（哲学家，思想家）


HBC型球阀 Model HBC Ball Valve

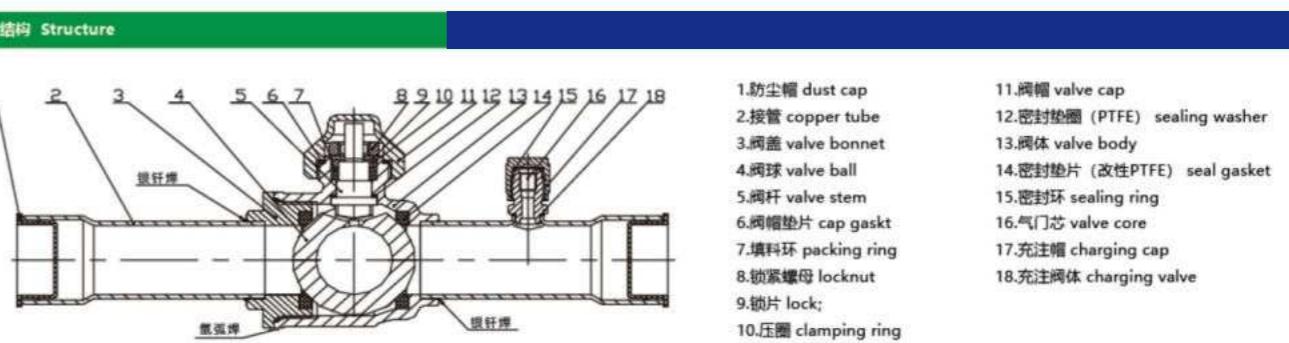

产品概述 Product Description	
<ul style="list-style-type: none"> HBC型球阀是手动调节的截止阀，适用于双向流动。 HBC型球阀用于冷冻、冷藏和空调调节装置的液体、吸气和热气管路上。 HBC型球阀的阀座与密封处具有很好的密封性。 HBC型球阀为直通型，可提供最大的流量，同时该阀的工作温度范围宽。 HBC型球阀配有一个带二次密封的密封帽。 	
特点 Features	
<ul style="list-style-type: none"> 流动无压力降 从全开到全闭只需转动1/4圈 全开和全闭均有旋转限位 阀杆顶端标记是阀的全开和全闭 具有双向流动性 氩弧焊接结构 	<ul style="list-style-type: none"> 防爆阀杆设计 改性的PTFE密封 可防止内部积液 能安装在控制板上 No pressure drop in flow. Only turn 1/4 circle to make valve full open or full close. Turning stop for full open or full close. Full Open and Full Close mark on top of valve stem. Two-direction flow is available. Argon arc welded structure. Modified PTFE sealing. Inside liquid accumulation is avoided. Could be mounted on the control panel.
技术参数 Technical Parameters	
适用制冷剂 Applicable Refrigerant:	HCFC or HFC(客户选择)(Customer choice)
适用介质温度 Applicable Medium Temperature:	-40~+120°C
最大工作压力 MAX.Working Pressure	4.5MPa
最大耐压压力 MAX. Compression Pressure	6.5MPa
制冷剂年泄漏量 Yearly Leakage of Refrigerant	≤2g R22/a

• HBC型球阀包括2种阀型：一种带充注检测口，一种不带充注检测口。
• Two types of Model HBC ball valve are available: one is equipped with the charging and inspection port; the other is not equipped with the charging and inspection port.

选型表 Model Selection						
型号 Model	规格 Size	通径OD(mm)	Kv值(m ³ /h)	型号 Model	规格 Size	通径OD(mm)
HBC-6S	1/4(Φ6)	Φ10	2	HBC-28	1-1/8(Φ28)	Φ25
HBC-10S	3/8(Φ10)	Φ10	5.7	HBC-35	1-3/8(Φ35)	Φ31
HBC-12S	1/2(Φ12)	Φ10	5.7	HBC-42	1-5/8(Φ42)	Φ37
HBC-10	3/8(Φ10)	Φ14	5.7	HBC-54	2-1/8(Φ54)	Φ50
HBC-12	1/2(Φ12)	Φ14	10.6	HBC-67	2-5/8(Φ67)	Φ50
HBC-16	5/8(Φ16)	Φ14	14.1	HBC-79	3-1/8(Φ79)	Φ50
HBC-19	3/4(Φ19)	Φ16	20.4	HBC-67A	2-5/8(Φ67)	Φ60.5
HBC-22	7/8(Φ22)	Φ19	28.2	HBC-79A	3-1/8(Φ79)	Φ73

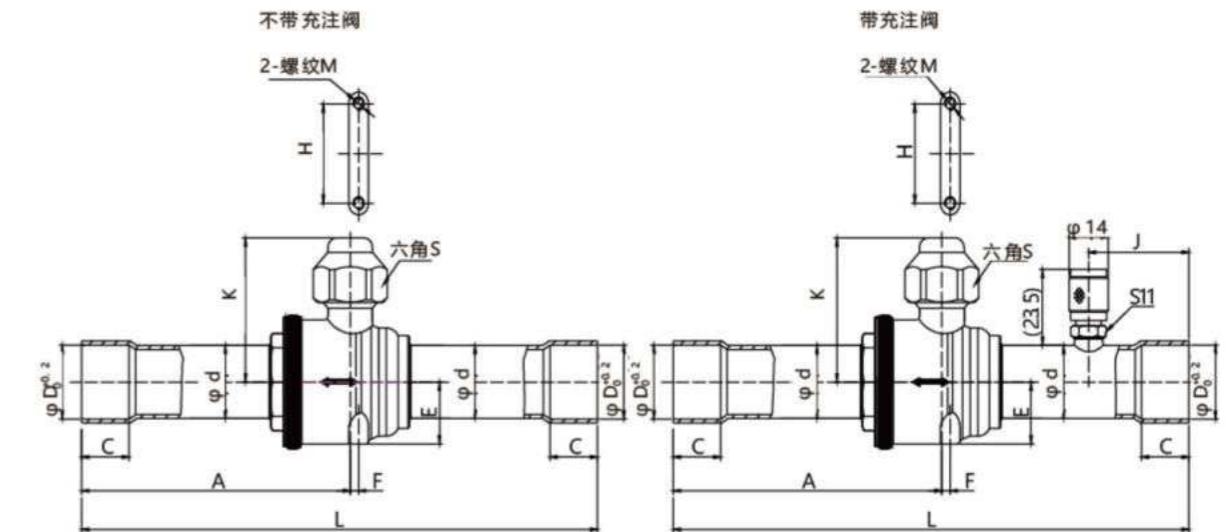


型号 Model	A	C	D	d	E	F	K	M	J	H	L
HBC-6S	57	6	6.5	10	14	0	32.5	M4	20	44	110
HBC-10S	65	8	10.1	10	14	0	32.5	M4	26	44	126
HBC-12S	67	10	12.8	12	14	0	32.5	M4	26	44	130
HBC-10	73	9	10.1	16	14.5	2	38	M4	30	50	138
HBC-12	83	10	12.8	16	14.5	2	38	M4	30	50	159
HBC-16	83	12	16.1	16	14.5	2	38	M4	30	50	159
HBC-19	97	14	19.1	19	16.5	3	42	M4	36	58	185
HBC-22	96	17	22.3	22	19	3	43	M4	36	58	185
HBC-28	108	20	28.7	28	24	4	52.5	M4	44	66	208
HBC-35	130	25	35.2	35	30	5	64	M6	44	80	251
HBC-42	145	29	41.5	41.3	35	6	74	M6	56	87	281
HBC-54	157	35	54.2	54	45.5	9	83.5	M6	56	106	305
HBC-67	157	37	67	54	45.5	9	83.5	M6	63	106	305
HBC-79	157	40	79.6	54	45.5	9	83.5	M6	63	106	305
HBC-67A	171	37	67	66.8	54	16	94	M6	72	117	343
HBC-79A	207	37	79.6	79.4	64	16	104	M6	80	117	413

QFT型 球阀 Model QFT Ball Valve




结构 Structure

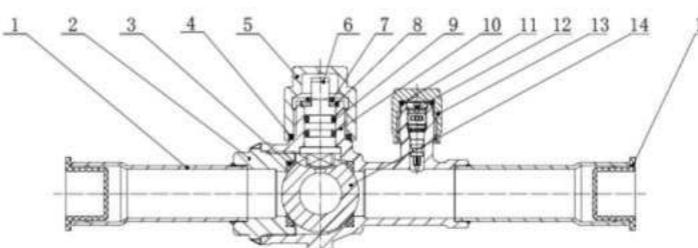


- | | |
|---------------------|-----------------------|
| 1. 接管 Copper tube | 9. O形圈 O-Ring |
| 2. 阀盖 Valve bonnet | 10. 阀体 Valve body |
| 3. 密封垫片 Seal gasket | 11. 密封圈 Seal gasket |
| 4. 阀帽垫片 cap gasket | 12. 气门芯 Valve core |
| 5. 阀帽 Valve cap | 13. 充注平帽 Charging cap |
| 6. 阀杆 Valve stem | 14. 钢球 Valve ball |
| 7. 挡圈 Check ring | 15. 防尘帽 Cap |
| 8. 限位片 Limiter | |

外形尺寸 Dimensions

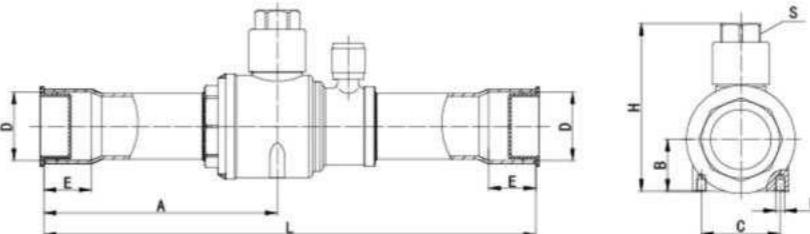

带芯型QFT-V with Charging port

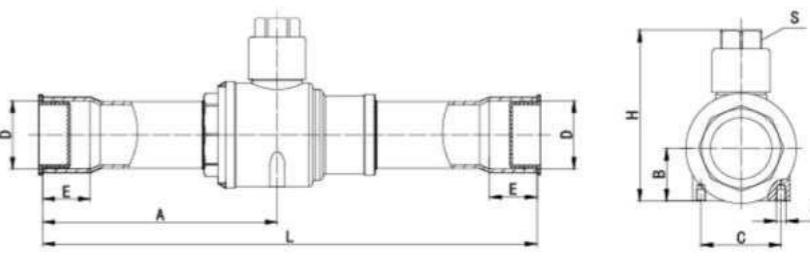

不带芯型QFT without Charging port

产品概述 Product Description

- QFT型球阀是手动调节的截止阀，适用于双向流动，用于冷冻、冷藏和空调调节装置的液体、暖气和热气管路上。采用阀杆密封和阀球密封两个特有的密封组件设计，并选用特殊的密封材质，保证了产品在常用制冷工质环境应用下良好运行。

Model QFT ball valve is a manually adjusted shut off valve, which is applicable to bidirectional flow, can be applied in the liquid, heating and hot gas pipelines of Refrigeration and A/C equipment. The special design of stem seal and valve ball seal with special sealing materials ensure the superior performance under common refrigerant working environment.

特点 Features

- | | |
|---|---|
| • 双向流动，可任意安装。
• 精密锻造优质铜材阀体。
• 介质流动压力降小。
• 防爆阀杆设计。
• 特选兼容常用制冷工质运行环境的密封圈。
• 全开和全闭均有旋转限位。
• 阀杆部位具有二次可靠密封结构。
• 能安装在控制板上便于固定。 | • Bi-flow direction, can be installed arbitrarily.
• Precision forged high-quality copper valve body.
• Small pressure drop from medium refrigerants.
• Explosion-proof stem design.
• Sealing rings applicable for
• rotary-limit design for fully open/closed
• Secondary reliable sealing structure on the valve stem.
• Can be installed on the control board for easy fixation. |
|---|---|

技术参数 Technical Parameters

最大工作压力 MAX. working pressure	650PSI/45BAR
适用制冷剂 Applicable refrigerant	R22, R134a, R404A, R407C, R410A等 R22, R134a, R404A, R407C, R410A, etc.
适用介质工作温度 Applicable medium working temperature	-40°C ~ +120°C

选型表 Model Selection

型号 Model	规格 size 焊接承口内径 ID (mm)	连接方式 Connections								
		丝堵 Thread堵	卡套式接头 Compression fitting	快装接头 Quick connect	螺纹接头 Thread fitting	法兰接头 Flange fitting	焊接接头 Welding fitting	卡套式接头 Compression fitting	快装接头 Quick connect	螺纹接头 Thread fitting
QFT-6V/QFT-6	Φ6.50 $\frac{1}{2}$ "									
QFT-10V/QFT-10	Φ10.10 $\frac{3}{8}$ "									
QFT-12V/QFT-12	Φ12.80 $\frac{1}{2}$ "									
QFT-16V/QFT-16	Φ16.10 $\frac{5}{8}$ "									
QFT-19V/QFT-19	Φ19.20 $\frac{3}{4}$ "									
QFT-22V/QFT-22	Φ22.30 $\frac{7}{8}$ "									
QFT-28V/QFT-28	Φ28.70 1"									
QFT-35V/QFT-35	Φ35.20 $\frac{9}{8}$ "									
QFT-42V/QFT-42	Φ41.50 $\frac{11}{8}$ "									
QFT-54V/QFT-54	Φ54.20 $\frac{13}{8}$ "									

型号 Model	外形尺寸 Overall Dimension								
	D	L	E	H	A	B	C	M	S
QFT-6V/QFT-6	Φ6.50 $\frac{1}{2}$ "	120	7	45.2	51.1	14	16	M4	S12
QFT-10V/QFT-10	Φ10.10 $\frac{3}{8}$ "	140	9	45.2	60.9	14	16	M4	S12
QFT-12V/QFT-12	Φ12.80 $\frac{1}{2}$ "	140	10	45.2	60.9	14	16	M4	S12
QFT-16V/QFT-16	Φ16.10 $\frac{5}{8}$ "	159	14	53.3	70.8	17	16	M4	S14
QFT-19V/QFT-19	Φ19.20 $\frac{3}{4}$ "	169	16	54.2	76.5	16.5	22	M4	S14
QFT-22V/QFT-22	Φ22.30 $\frac{7}{8}$ "	186	17	57.0	86.5	18	24.8	M4	S14
QFT-28V/QFT-28	Φ28.70 1"	208	20	70.4	98.8	22	34	M4	S17
QFT-35V/QFT-35	Φ35.20 $\frac{9}{8}$ "	251	25	80.0	119.2	27	38	M4	S17
QFT-42V/QFT-42	Φ41.50 $\frac{11}{8}$ "	280	29	100.1	137.1	33	48	M6	S24
QFT-54V/QFT-54	Φ54.20 $\frac{13}{8}$ "	305	34	115.2	150.6	40.5	62	M6	S24

QF-CO2型 球阀 Model QF-CO2 Ball Valve



产品概述 Product Description

- 双向流动，可任意安装。
- 精密铸造阀体带不锈钢管。
- 全阀口结构与管道内径匹配，流动无压力降。
- 防爆阀杆设计。
- 特选兼容CO2运行环境的密封圈。
- 全开和全闭均有旋转限位。
- 阀杆部位具有二次可靠密封结构。

- Model QF-CO2 ball valve is applicable to two-direction flow, can be installed freely.
- Precision cast body with stainless steel.
- No pressure drop due to the full bore structure.
- Explosion-proof stem design.
- Special seals compatible with CO2 operating environment.
- Rotation limit for both full open and close.
- Reliable structure with a secondary seal at valve stem.

特点 Features

- 流动无压力降
- 从全开到全闭只需转动1/4圈
- 全开和全闭均有旋转限位
- 阀杆顶端标记是阀的全开和全闭
- 具有双向流动性
- 氩弧焊接结构

- 防爆阀杆设计
- 改性的PTFE密封
- 可防止内部积液
- 能安装在控制板上
- No pressure drop in flow.
- Only turn 1/4 circle to make valve full open or full close.
- Turning stop for full open or full close.
- Full Open and Full Close mark on top of valve stem.
- Two-direction flow is available.
- Argon arc welded structure.
- Explosion-proof valve stem design.
- Modified PTFE sealing.
- Inside liquid accumulation is avoided.
- Could be mounted on the control panel.

技术参数 Technical Parameters

工作温度 Working temperature:

-50°C ~ +150°C

最大工作压力 MAX.Working Pressure:

12MPa

选型表 Model Selection

型号 Model	规格 Size	通径 OD (mm)	Kv值 (m³/h)
	焊接口外径 (mm)		
QF12-CO2	12	10	10
QF16-CO2	16	14	14
QF19-CO2	19	15	20
QF22-CO2	22.3	18.2	28
QF28-CO2	28.6	24.4	52
QF35-CO2	35	29	80
QF42-CO2	41.3	35	121
QF54-CO2	56.3	49	200


1) Kv值: 密度为1吨/m³的水在通过电磁阀的压差等于100KPa时的流量, 单位为m³/h;

2) 气态介质的MOPD约0.1MPa。

1) Kv value: the flow of water with density of 1 ton/m³ when passing through the solenoid valve under 100KPa differential pressure


2) MOPD of gaseous medium is about 0.1MPa.

结构 Structure

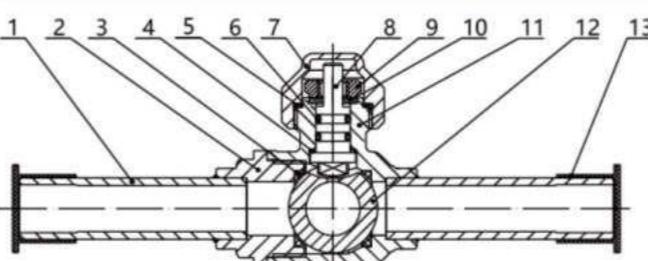

- 1. 接管 copper tube
- 2. 阀盖 valve bonnet
- 3. 密封垫片 seal gasket
- 4. 密封垫 seal
- 5. 阀帽垫片 cap gasket
- 6. 密封圈 Seal ring
- 7. 阀帽 valve cap
- 8. 阀杆 valve stem
- 9. 锁紧螺母 locknut
- 10. 限位片 Limiter
- 11. 阀体 valve body
- 12. 阀球 valve ball
- 13. 防尘帽 dust cap

外形尺寸 Overall Dimension

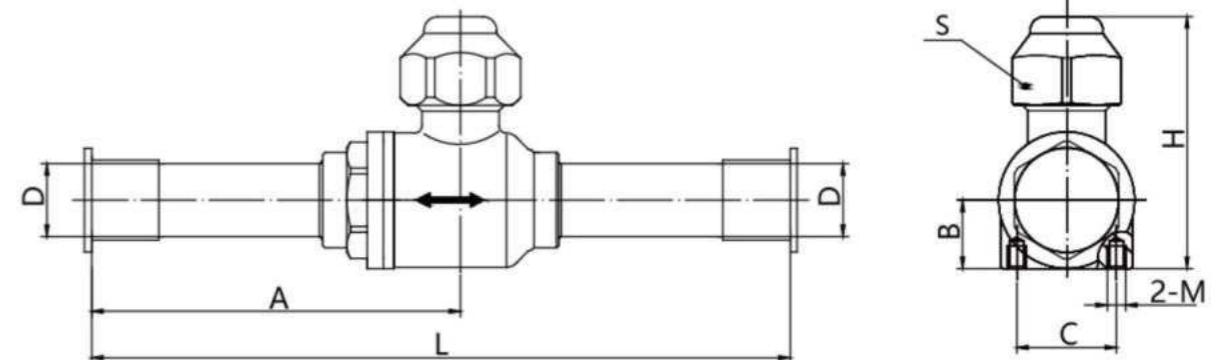

型号 Model

D	L	H	A	B	C	M	S
QF12-CO2	φ12	131.5	50.4	68	13.2	/	M5 S24
QF16-CO2	φ16	154	55.8	81.3	15	22	M5 S24
QF19-CO2	φ19	168	63	89.8	19	30	M5 S24
QF22-CO2	φ22.3	193.5	63	102.6	19	30	M5 S24
QF28-CO2	φ28.6	213	82.8	112.3	30	30	M5 S28
QF35-CO2	φ35	232.6	98.7	125	29.8	48	M6 S32
QF42-CO2	φ41.3	245.3	108.5	127.1	34	55	M6 S32
QF54-CO2	φ56.3	304	129.9	163	45.5	74	M6 S36

安全阀系列

SAFETY VALVE

Series



弹簧直接载荷式安全阀,当在设定条件下,推力超过作用在关闭件上的弹簧的反作用力时,通过撞击在关闭件上的欠压流体打开泄压。

It is spring direct loaded, valve will open when the thrust exceeds the reaction force of the spring on the closure.

FS FL型安全阀 Model FS/FL Safety Valve

外形尺寸 Overall Dimension




(FS型)




(FS型)




(FL型)

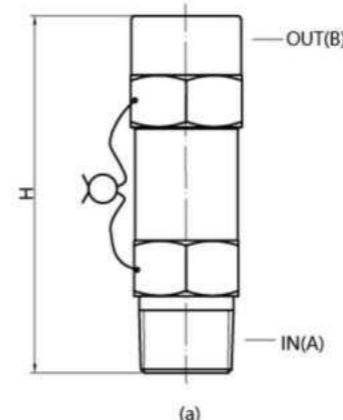

(a)

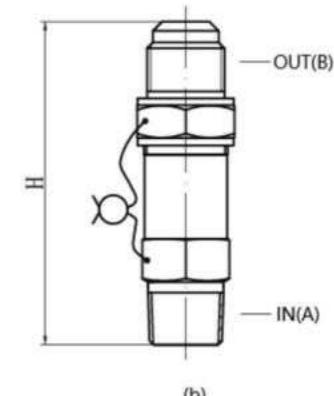

(b)

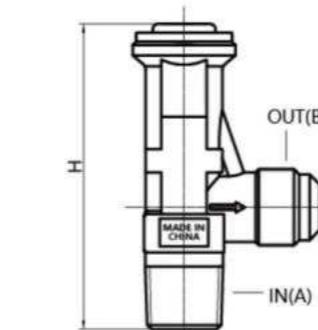

(c)

(d)

产品概述 Product Description

• 鸿森安全阀为弹簧直接载荷式安全阀，当在设定条件下，推力超过作用在关闭件上的弹簧的反作用力时，通过撞击在关闭件上的欠压流体打开泄压。该阀门用于安装在民用和工业型制冷和调节设备上，如蒸发器、冷凝器、容积式压缩机、液体接收器、液体储能器、热交换器、油分离器、管道和简单的未燃烧压力容器等设备。其功能是保护上述设备由于设计的操作条件免受可能的超压影响。

The Hongsen safety valve is spring direct loaded, valve will open when the thrust exceeds the reaction force of the spring on the closure. The valve is used to installed on civil and industrial refrigeration and regulatory equipment, such as evaporator, condenser, volume compressor, liquid receiver, liquid energy storage, heat exchanger, oil separator, pipeline and simple unbusted pressure Containers and other equipments. This valve is to avoid these equipments from possible overpressure effects due to the special design.

技术参数 Technical Parameters

适用制冷剂 Applicable refrigerants CFC, HCFC, HFC

运行温度范围 Running temperature -50°C~150°C

整定压力 Set-pressure 鸿森标准和根据客户要求定制 :Hongsen standard, customization applicable

接口标准 Standard

- 容积 < 50L 的，安全阀接口3/8" -18NPT;
- 容积 ≥ 50L 且 < 500L 的，安全阀接口1/2" -14NPT;
- 容积 ≥ 500L 且 < 1000L 的，安全阀接口3/4" -14NPT;
- 容积 ≥ 1000L 的，安全阀接口1" -11.5NPT.

- The volume < 50L, the safety valve connection is 3/8" -18NPT;
- The volume ≥ 50L & < 500L, the safety valve connection is 1/2" -14NPT;
- The volume ≥ 50L & < 1000L, the safety valve connection is 3/4" -14NPT;
- The volume ≥ 1000L, the safety valve connection is 1" -11.5NPT.



型号 Model	喉径 (流通直径) Throat diameter (Flow diameter) (mm)	H (mm)	阀体六角尺寸 Valve body six angle size	A (进口接口型式) Inlet form	B (出口接口型式) Outlet form	图例 Fig.
DN25 FS-A8N8	Φ18	117	S46	1" NPT	1" NPT	a
DN20 FS-A6N6	Φ11	102	S31	3/4" NPT	3/4" NPT	a
DN15 FS-A4B5	Φ7.5	93	S25	1/2" NPT	5/8SAE	b
DN15 FS-A4B4	Φ7.5	89	S25	1/2" NPT	1/2SAE	b
DN10 FS-A3B3	Φ7	86	S25	3/8" NPT	3/8SAE	b
DN8 FS-A2B3	Φ6	84	S25	1/4" NPT	3/8SAE	b
DN15 FL-A4B5	Φ7.5	89	S25	1/2" NPT	5/8SAE	c
DN15 FL-A4B4	Φ7.5	89	S25	1/2" NPT	1/2SAE	c
DN10 FL-A3B4	Φ7	84	S25	3/8" NPT	1/2SAE	c
DN10 FL-A3B3	Φ7	84	S25	3/8" NPT	3/8SAE	c
DN8 FL-A2B3	Φ6	82	S25	1/4" NPT	3/8SAE	c
DN15 FL-A4G4	Φ7.5	96	S25	1/2" NPT	G1/2	d
DN10 FL-A3G4	Φ7.5	90	S25	3/8" NPT	G1/2	d

鸿森标准整定压力: Hongsen standard set-pressure:

1. 2.0MPa 2. 2.4MPa 3. 2.8MPa 4. 3.1MPa 5. 3.4MPa

GFM-S-NPT型球阀 Model NPT Ball Valve

结构 Structure

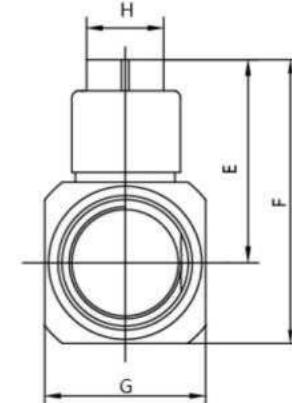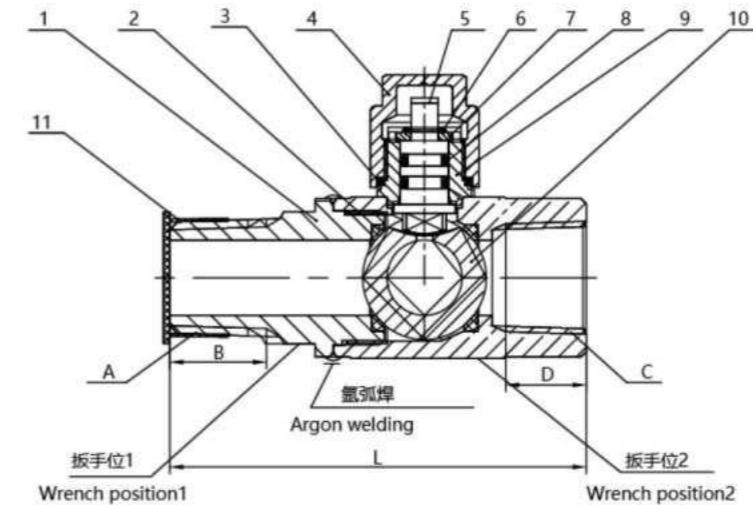

产品概述 Product Description

GFM-S-NPT螺纹型球阀是手动调节的截止阀，适用于双向流动，用于冷冻、冷藏和空调调节装置的液体、暖气和热气管路上，采用阀杆密封和阀球密封两个特有的密封组件设计，并选用特殊的密封材质，保证了产品在常用制冷工质环境应用下良好运行。

Model NPT ball valve is a manually adjusted shut off valve, which is applicable to bidirectional flow, can be applied in the liquid, heating and hot gas pipe lines of refrigeration and A/C equipment. The special design of stem and valve ball seal with special materials ensure the superior performance under common refrigerant working environment.

- 1. 阀盖 valve bonnet
- 2. 密封垫片 cap gasket
- 3. 阀帽垫片 cap gasket
- 4. 阀帽 valve cap
- 5. 阀杆 valve stem
- 6. 挡圈 Retainer
- 7. 锁片 lock
- 8. O形圈 O-Ring
- 9. 阀体组件 Valve body
- 10. 钢球 Steel ball
- 11. 防尘帽 Dust cap

特点 Features

- 双向流动，可任意安装。
- 精密锻造优质铜材阀体。
- 防爆阀杆设计。
- 全开和全闭均有旋转限位。
- 阀杆部位具有二次可靠密封结构。
- 适用于大多数常用制冷工质。

- Bi-flow direction, can be installed arbitrarily
- Precision forged high-quality copper valve body
- Explosion-proof stem design.
- Rotary-limit design for full open/closed.
- Secondary reliable sealing structure on the valve stem
- Can be used in most kinds of common refrigerants

技术参数 Technical Parameters

最大工作压力 MAX.Working Pressure

1740Psi/120Bar

适用制冷剂 Applicable Refrigerant

R22, R134a, R404A, R407C, R410A




适用介质工作温度 Applicable Medium Temperature

-40°C ~ 120°C

连接螺纹 Connection Thread	A	B	C	D	E	F	G	H	L
GFM-S-NPT 1/4	NPT 1/4	12	NPT 1/4	12	31	43	□24	S12	64.5
GFM-S-NPT 3/8	NPT 3/8	13.5	NPT 3/8	13	31	43	□24	S12	64.5
GFM-S-NPT 1/2	NPT 1/2	18	NPT 1/2	15	38	53	□30	S14	77.5
GFM-S-NPT 3/4	NPT 3/4	16.5	NPT 3/4	16	41	57	□32	S14	86.5
GFM-S-NPT 1	NPT 1	17.5	NPT 1	17	42	61	□38	S14	96

双出口泄压阀 TWO-OUTLET PRESSURE RELIEF VALVE

外形尺寸 Dimensions

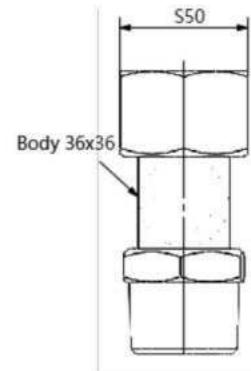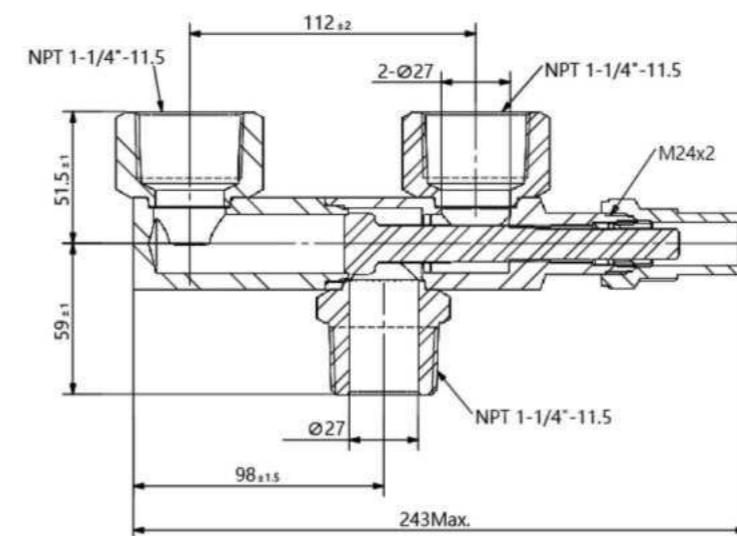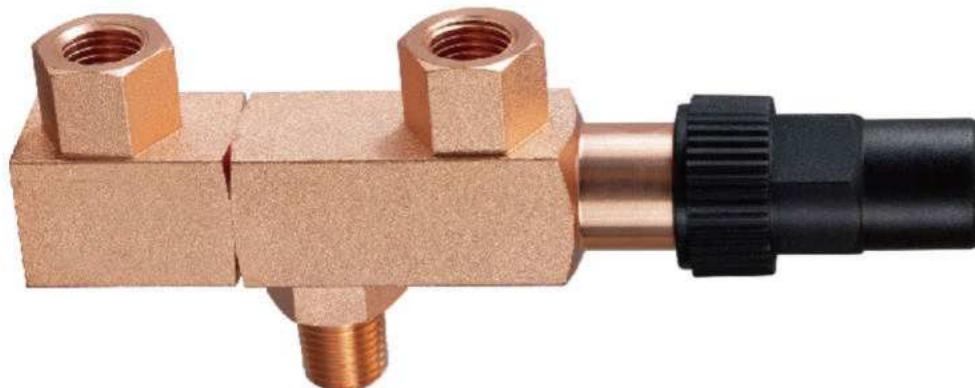

技术参数 Technical Parameters	
最大工作压力 MAX.Working Pressure	4.2Mpa
最大耐压压力 MAX.Compression Pressure	6.3Mpa
适用介质温度 Applicable MEDIUM Temperature	-40°C~150°C
适用制冷剂 Applicable Refrigerant	R22, R134a, R410A, R507A, R448A, R449A, R404A

型号 Model	阀体 Valve body	A	Ø1	Ø0	B	C	H	L
HS-2F-NPT1/4	Ø22	NPT1/4" -18	Ø8.5	Ø8.5	55	31.5	58	145
HS-2F-NPT3/8	Ø22	NPT3/8" -18	Ø11.5	Ø11	55	31.5	64	146
HS-2F-NPT1/2	Ø22	NPT1/2" -14	Ø13	Ø13	55	31.5	71.5	146
HS-2F-NPT3/4	Ø30	NPT3/4" -14	Ø19	Ø19	66	38	81	170
HS-2F-NPT1	Ø36	NPT1" -11.5	Ø25	Ø24	82	46	101	215
HS-2F-NPT1-1/4	Ø36	NPT1-1/4" -11.5	Ø27	Ø27	112	98	110.5	243

视液镜系列

SIGHT GLASS

Series



使用改性PTEE密封材质,适用于多种制冷剂及冷冻油,又具有很好的密封性能。
采用防爆压结构,观察窗清晰而安全。
采用优质铜棒锻压,强度高,塑性好。

The modified PTEE seal material is suitable for various refrigerants and refrigerant oils.
It also has good sealing performance.
The explosion-proof structure is adopted, and the observation window is clear and safe.
High quality copper bar is used for forging, high strength and good plasticity.

SGN型液视镜 Model SGN Sight Glass



产品概述 Product Description

- SGN型视液镜用于制冷、空调装置的液体管路上，用来指示制冷剂的流动状况、制冷剂中的含水量及油分离器回油管路中润滑油的流动状况。
- SGN型视液镜带有一潮湿指示器，通过改变颜色来指示制冷剂中的含水量。
- SGR型视液镜用于贮液器中制冷剂的液位或压缩机曲轴箱中润滑油的液位。
- SGN型视液镜均使用改性PTFE密封材料，适用于多种制冷剂及冷冻油，又具有很好的密封性能。
- SGN型/SGR型视液镜采用防爆压接的结构，观察窗清晰而安全。

- Both Model SGN sight glass is used on the liquid piping of the refrigeration and air conditioning unit to indicate the flow condition of the refrigerant, water cut of the refrigerant and lubricant oil flow condition of the oil separator.
- Model SGN sight glass and is equipped with one moisture indicator, which will change color to indicate the water cut in the refrigerant.
- Model SGR sight glass is used to indicate the level of the refrigerant in the liquid drum and the lubricant oil level in the compressor crankcase.
- The modified PTFE sealing is used in both Model SGN sight glass and Model SGR sight glass, which is applicable to various refrigerants and oils with perfect sealing performance. The structure of both Model SGN sight glass and Model SGR sight glass is an explosion-proof press fit and the viewing glass is clear and safety.

技术参数 Technical Parameters

适用制冷剂 Applicable Refrigerant:	HCFC and HFC
适用介质温度 Applicable Medium Temperature:	-40°C ~ +80°C
最大工作压力 MAX.Working Pressure	4.5MPa
最大耐压压力 MAX. Compression Pressure	6.8MPa
制冷剂年泄漏量 Yearly Leakage of Refrigerant	≤2g R22/a

注意：全封闭压缩机的允许含水量一般在30~75ppm之间，而其他压缩机则略高。为使系统得到有效保护，必须谨慎地监视指示器，若颜色变为黄色，则必须更换干燥器。
Note: For the fully enclosed compressor, generally the allowable water cut is in a range 30~75ppm, but for other types of compressor, the water cut will be higher slightly. For an effective protection, it is necessary to monitor the indicator carefully and replace the drier immediately if the color is changed into yellow.


选型表 Model Selection

焊口型号 Model of Welded Connection	规格 Size	螺口型号 Model of Threaded Connection	规格 Size
SGN-1/4 ODF	1/4(Φ6)	SGN-1/4 SAE	1/4 SAE
SGN-3/8 ODF	3/8(Φ10)	SGN-3/8 SAE	3/8 SAE
SGN-1/2 ODF	1/2(Φ12)	SGN-1/2 SAE	1/2 SAE
SGN-5/8 ODF	5/8(Φ16)	SGN-5/8 SAE	5/8 SAE
SGN-3/4 ODF	3/4(Φ19)	SGN-3/4 SAE	3/4 SAE
SGN-7/8 ODF	7/8(Φ22)	SGN-3/4NPT	3/4NPT
SGN-1 $\frac{1}{8}$ ODF	1 $\frac{1}{8}$ (Φ28)	SGR-G3/4	G3/4

含水量与颜色的关系 Correlation between Water Cut and Color

	Water Cut(ppm) 含水量(百万分之一)					
	25°C 绿色 Green/DRY	25°C 中间颜色 Medium Color	25°C 黄色 Yellow/WET	43°C 绿色 Green/DRY	43°C 中间颜色 Medium Color	43°C 黄色 Yellow/WET
	<30	30~120	>120	<50	50~200	>200
R22/R502	<30	30~120	>120	<50	50~200	>200
R134a	<30	30~100	>100	<45	45~170	>170
R404A	<20	20~70	>70	<25	25~100	>100
R407c	<30	30~140	>140	<60	60~225	>225
R507	<15	15~60	>60	<30	30~110	>110
R410A	<66	66~266	>266	<135	135~540	>540


结构 Structure

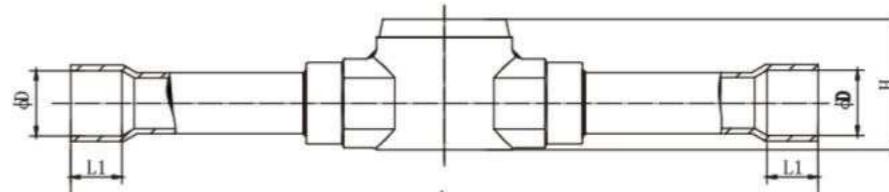

焊口视液镜
Soldering type sight glass


Model	L	L1	D	H
SGN-1/4 ODF	102	7	6.5	21.5
SGN-3/8 ODF	119	8	10.1	22.5
SGN-1/2 ODF	146	10	12.8	26.5
SGN-5/8 ODF	152	14	16.1	29.5

Model	L	L1	D	H
SGN-3/4 ODF	167	16	19.2	35
SGN-7/8 ODF	173	17	22.2	39
SGN-1-1/8 ODF	216	20	28.7	44.5

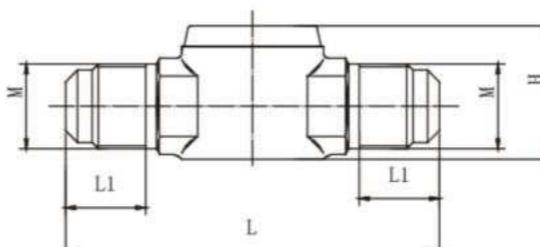

螺口视液镜
Flare type sight glass

Model	L	L1	H	Thread M
SGN-1/4 SAE	64	13	21.5	7/16-20UNF
SGN-3/8 SAE	70	15	25	5/8-18UNF
SGN-1/2 SAE	75	16	26.5	3/4-16UNF
SGN-5/8 SAE	80	18	29.5	7/8-14UNF
SGN-3/4 SAE	90	20.5	35	1-1/16-14UNS

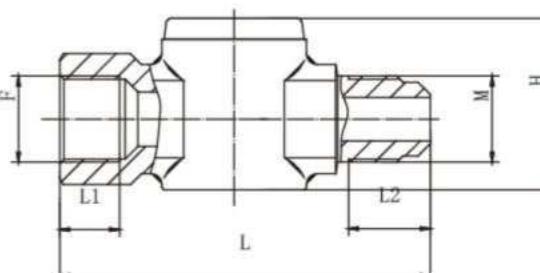

内外螺口视液镜
M/F flare type sight glass

Model	L	L1	L2	H	Thread F/M
SGN-1/4-MF	60	8.5	12	25	7/16-20UNF
SGN-3/8-MF	68	11	15	31.5	5/8-18UNF
SGN-1/2-MF	70	11.5	16	34.5	3/4-16UNF
SGN-5/8-MF	78	13	18	38	7/8-14UNF

单向阀\截止阀

CHECK VALVE / SHUT OFF VALVE Series

REFRIGERATION A/C SYSTEM ACCESSORIES

(手阀) 高品质膜片确保外密封性，独特结构很小力矩可实现内密封。

(单向阀) 确保唯一的正确的流动方向，阀口有很好的密封性。

(Hand valve) High sensitive diaphragm ensures good sealing, and allows small torque power to seal the valve.
One-way Valve) To ensure the only correct direction of flow, valve has strong sealing performance .



ARTECO

CV型单向阀 Model CV Check Valve



产品概述 Product Description

- CV和CVRH型单向阀用于冷冻、冷藏和空调调节装置的液体、吸气和热气管路上。
- CV和CVRH型单向阀可提供超大尺寸连接，以提高单向阀应用的灵活性。
- Model CV check valve is used on the piping of liquid, suction gas or hot air on the freezing, cold storage and air conditioner units.
- The valve seat and seals of Model CV check valve have excellent sealing performance.
- For Model CV check valve, both threaded and welded connections are available.

特点 Features

- 该阀可确保唯一的正确的流动方向。
- 有直通阀和角阀两种形式，阀座和密封处具有很好的密封性。
- 可防止制冷剂从高温蒸发器向低温蒸发器回流。
- 内置减震活塞，可安装在有压力脉冲的地方，如压缩机的排气管路上。
- CV单向阀可提供螺口和焊口两种接口。
- CVRH具有 $\Delta P=0.3$ bar的加强弹簧，应用于压缩机并联的制冷装置中。
- Ensure one flow direction and avoid reversal.
- With the built-in damper and could be mounted on the piping with pressure pulsation.
- Prevent refrigerant back flow from high temperature evaporator to low temperature evaporator.
- Applicable to the refrigeration unit in parallel with compressor.
- Both direct flow type and right-angle type are available.

技术参数 Technical Parameters

适用制冷剂 Applicable Refrigerant: HCFC或HFC (客户指定)

适用介质温度 Applicable Medium Temperature: -50°C ~ +140°C

最大工作压力 MAX.Working Pressure: 46bar

最大试验压力 Maximum Test Pressure: 60bar


选型表 Model Selection

型号 Model	型式 Type	规格 Specs		通径(mm) I.D.(mm)	Kv值(m³/h) Kv(m³/h)
		喇叭口 Flare	焊接口 Welded		
CV-6	直通型	1/4 SAE	/	4.8	0.56
CV-6T	直通型	/	1/4 ODF	4.8	0.56
CV-10	直通型	3/8 SAE	/	8	1.43
CV-10GT	直通型	/	φ10 ODF	8	1.43
CV-12	直通型	1/2 SAE	/	10	2.05
CV-12T	直通型	/	1/2 ODF	10	2.05
CV-16	直通型	5/8 SAE	/	13	3.60
CV-16T	直通型	/	5/8 ODF	13	3.60
CV-19	直通型	3/4 SAE	/	16	5.50
CV-19T	直通型	/	3/4 ODF	16	5.50
CV-22T	直通型	/	7/8 ODF	19	8.50
CVR-22	直角型	/	7/8 ODF	19	8.50
CVRH-28	直角型	/	1-1/8 ODF	26	19.0
CVRH-35	直角型	/	1-3/8 ODF	31	29.0
CVRH-42	直角型	/	1-5/8 ODF	31	30.0


1) Kv值: 密度为1吨/m³的水在通过单向阀的压差等于100KPa时的流量, 单位为m³/h

1) Kv value: When the pressure differential is 100KPa, the flowrate at m³/h water in density 1 t/m³ flows through the solenoid valve.


结构 Structure

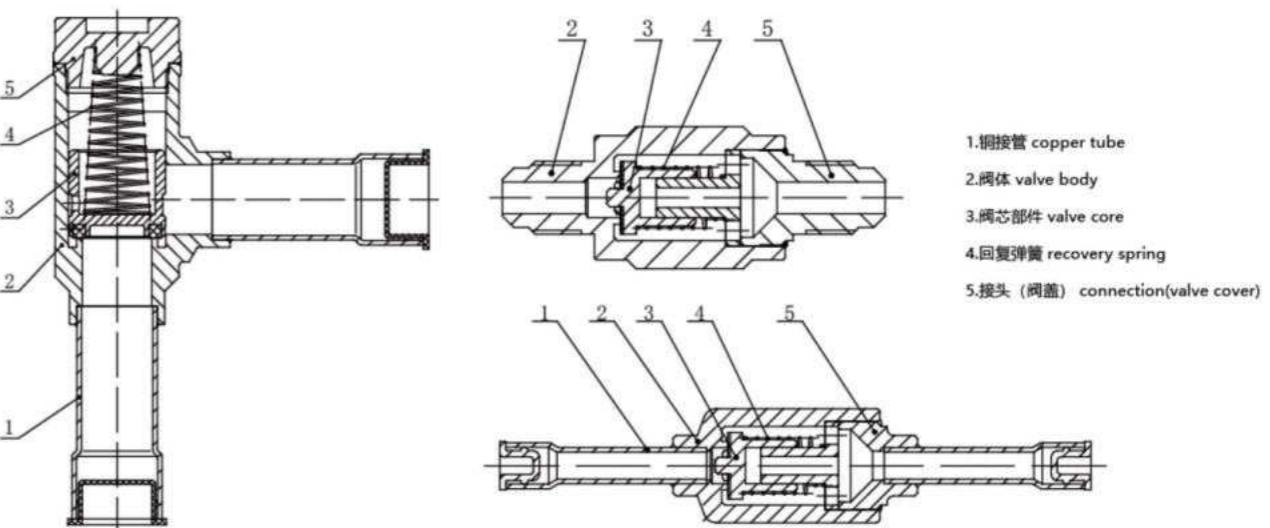

外形尺寸 Overall Dimension

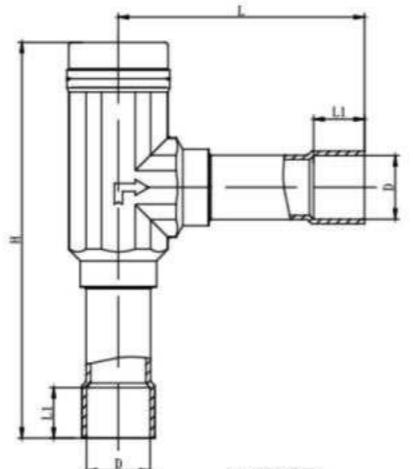

CVR型(焊口)

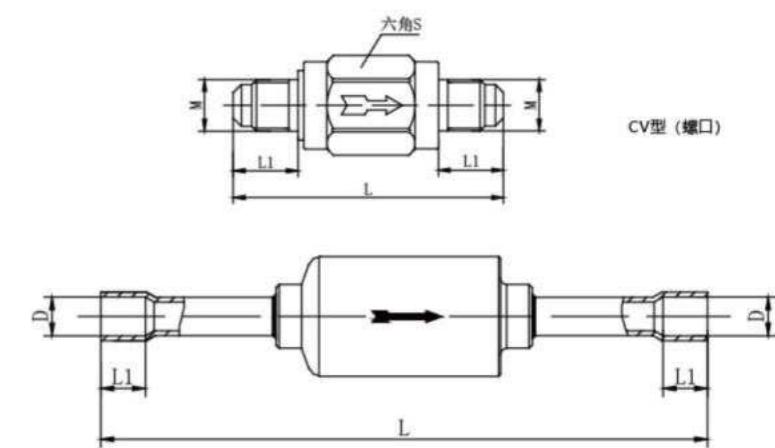

CV型 (螺口)

CV-T型(焊口)

型号 Model	外形尺寸 Overall Dimension			
	L	M	L1	S
CV-6	58	7/16-20UNF	14	19
CV-10	62	5/8-18UNF	16	21
CV-12	68	3/4-16UNF	18	24
CV-16	78	7/8-14UNF	21	27
CV-19	90	1-1/16-14UNF	24	32
	L	D	L1	
CV-6T	95	φ6.5	7	
CV-10GT	109	φ10.1	8	
CV-12T	119	φ12.8	10	
CV-16T	138	φ16.1	14	
CV-19T	150	φ19.2	16	
CV-22T	175.5	φ22.3	17	
	L	D	L1	H
CVR-22	84	φ22.3	17	136.5
CVRH-28	113	φ28.7	20	184
CVRH-35	126	φ35.2	25	197
CVRH-42	126	φ41.5	29	197

注: ①上述重量不带钠子; ②钠子单重: 1/4-18g, 3/8-30g, 1/2-33g, 5/8-50g, 3/4-93g,

Note: (1) Nut is excluded from above mentioned weight. (2) Nut weight: 1/4-18g, 3/8-30g, 1/2-33g, 5/8-50g and 3/4-93g.

CVS型膜片式单向阀 Model CVS Diaphragm Type Check Valve



产品概述 Product Description

膜片式单向阀采用磁性膜片式设计，金属和金属密封，应用于压缩机排气管路上，内部采用导向装置、自吸机构设计，从而使单向阀不受安装角度限制和反向压力大小的关系影响阀门的自动闭合。

The check valve adopts a magnetic diaphragm design, metal and metal seal. It can be used on the compressor exhaust pipeline. The guide component and self-absorbing structure design ensures the automatic close free off the influence from installation angle or reverse pressure difference.

特点 Features

- 复合膜片设计
- 通体紫铜管的设计，消除了外漏隐患
- 阀体中装有过滤网，兼备止回阀和过滤器的功能
- 工艺先进：先锡焊阀体与阀座，再装膜片和磁条，没有烧伤膜片，磁条退磁的隐患
- 逆向泄露小
- 极小的流通阻力，大流量，系统可忽略不计的损失效率
- 安装位置不受限制

- Composite film design
- The design of the whole copper tube body, eliminates the potential outer leaks
- Extra filter net, provides function of both check valve and filter
- Special artworks: tin welding before assembling diaphragm and magnetic strips, so that both diaphragm and magnetic strips can be protected.
- Extremely low reverse leak
- Low circulation resistance and large flow lift up the energy efficiency of system
- No special installation angle requested


技术参数 Technical Parameters

适用制冷剂 : HFC、HCFC	Applicable Refrigerant: HFC、HCFC
工作温度: -30°C~+120°C	Working temperature: -30°C~+120°C
介质温度: -40°C~+130°C	Applicable medium temp.: -40°C~+130°C
最大工作压力 : 4.5MPa	MAX working pressure: 4.5MPa
最小开启压力: 0.02MPa	MIN open pressure: 0.02MPa

选型表 Selection

型号 Model	接口尺寸ΦA Connection size	阀体尺寸ΦB Valve size	总长度C Length	泄漏量(≤ml/min) Leaking rate	KV值 (m3/h) KV value
CVS-6	6.4	22	102	50	0.49
CVS-10	9.7				1.19
CVS-12	12.8				1.86
CVS-16	16				3.48
CVS-19	19.1				5.61
CVS-22	22.3				7.74
CVS-28	28.7				13.38
CVS-35	35				23.28
CVS-42	41.4				27.42
CVS-54	54.1				46.44
CVS-67	66.8	41.3	127	330	67.80
CVS-79	79.5				67.80

外形尺寸 Overall Dimension

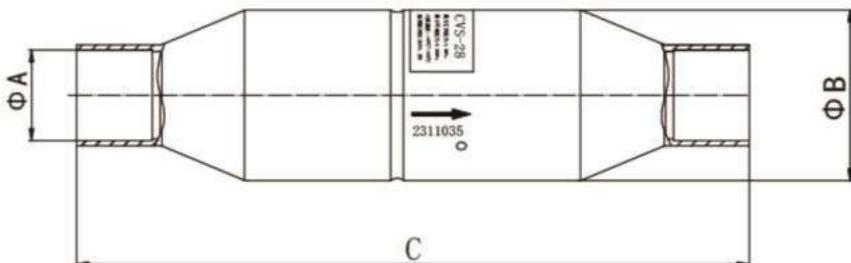

KM型 膜片式手阀 Model KM Diaphragm Hand Valve



产品概述 Product Description

- KM型手阀是一种手动膜片式截止阀，适用于单向流动。
- KM型手阀用于冷冻/冷藏和空气调节装置的液体/吸气和热气管路上。
- KM型手阀按接口方式分为两种：一种是螺口连接（SAE），可提供螺口规格1/4 SAE至3/4 SAE。另一种是焊口连接ODF，可提供接口尺寸1/4"至7/8"。所有KM型手阀都有安装固定孔，可用于仪表板上的安装。

- Model KM hand valve is a manually operated diaphragm stop valve for one-way flow control.
- Model KM hand valve is mounted on the liquid, air suction and hot air piping in the refrigeration, cold storage and air conditioner.
- Two types of connection are available for Model KM hand valve, that is, threaded connection (SAE) with threading size 1/4 SAE to 3/4 SAE and welded connection both ODF, structure hand valves have connection size 1/4" to 7/8" .
- All Model KM hand valves are equipped with mounting hole for the installation on the instrument panel.


特点 Features

- 带有2片不锈钢膜片，在阀的整个使用寿命期间内防止泄漏。
- 阀口采用弹性密封，用很小的力矩就可将阀关闭。
- 特殊阀盖设计，防止水、粉尘等进入阀内部。
- 阀杆只需旋转一圈半就可全开或全闭，操作便捷。


- There are 2 pieces of stainless steel diaphragm to prevent the hand valve from leakage during the whole service life of the hand valve.
- The elastic sealing is used on the valve port so that the hand valve could be shut off by small torque.
- The special valve bonnet design a used to prevent the hand valve from water or dust penetration.
- The hand valve is easy to be operated for full open or half open just by turning the valve stem for one and half turn.

技术参数 Technical Parameters

适用制冷剂 Applicable Refrigerant:	HCFC, HFC
适用介质温度 Applicable Medium Temperature:	-25°C ~ +100°C
最大工作压力 MAX.Working Pressure	3.0MPa
使用压力范围 Scope of Operating Pressure	-0.1MPa~2.1MPa
最大耐压试验压力 Maximum Hydrostatic Test Pressure	4.5MPa

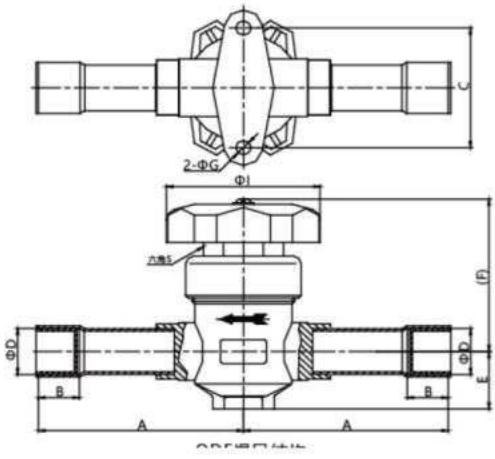

结构 Structure


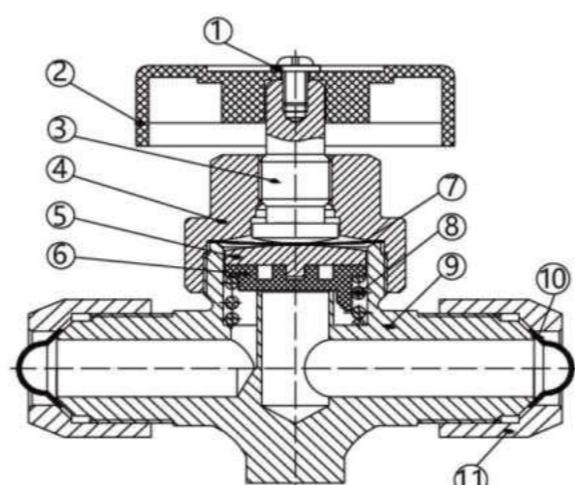


1. 螺钉 screw
2. 手轮 hand wheel
3. 阀杆 valve stem
4. 阀盖 valve bonnet
5. 铜片 copper sheet
6. 阀芯 valve element
7. 膜片 diaphragm
8. 弹簧 spring
9. 阀体 valve body
10. 防尘帽 dust cap
11. 纳子 (接管螺母) nut (piping nut)

选型表 Model Selection

型号 Model	喇叭口 Flare	焊接口(带钢管) Welded(with copper tube)	Kv(m³/h)
KM-1/4	1/4 SAE	1/4 ODF	0.28
KM-3/8	3/8 SAE	3/8 ODF	0.30
KM-1/2	1/2 SAE	1/2 ODF	1.30
KM-5/8	5/8 SAE	5/8 ODF	1.80
KM-3/4	3/4 SAE	3/4 ODF	3.65
KM-7/8	—	7/8 ODF	3.65

外形尺寸 Overall Dimension

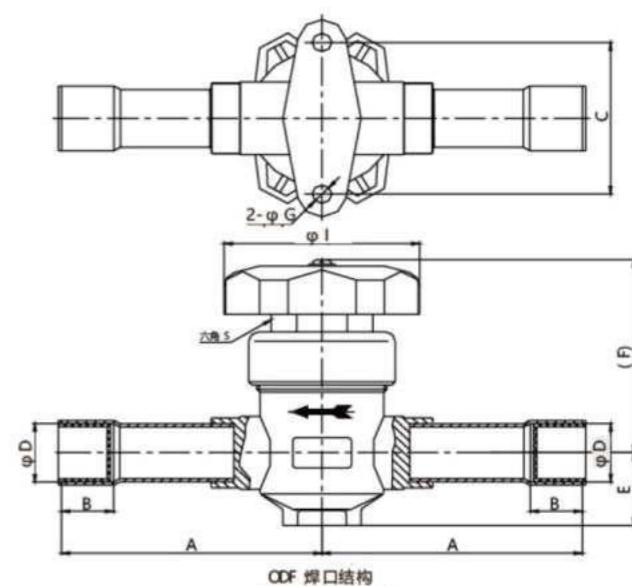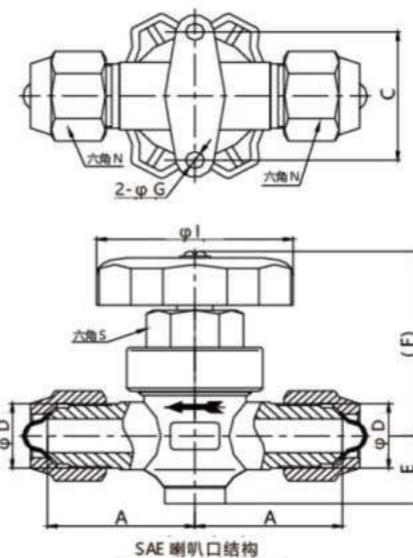

外形尺寸 Overall Dimension

型号 Model	外形尺寸 Overall Dimension									
	A	B	C	ΦD	E	(F)	ΦG	ΦI	S	N
1/4 SAE	28.5	—	36	—	14	(53)	Φ4.5	Φ53	S17	7/16-20UNF
1/4 ODF	51	7		6.5					S18	—
3/8 SAE	31	—		—					S22	5/8-18UNF
3/8 ODF	59	8		9.7					—	—
1/2 SAE	39	—	38	—	19	(57)	Φ5	S22	S24	3/4-16UNF
1/2 ODF	66	10		—					—	—
5/8 SAE	39	—		12.8					S27	7/8-14UNF
5/8 ODF	74	14		16.1					—	—
3/4 SAE	50	—	50	—	24	(64)	Φ6	Φ60	S32	1-1/16-14UNS
3/4 ODF	80	16		19.1					—	—
7/8 ODF	80	17		22.3					Φ71	—

避震波纹金属软管系列

VIBRATION RE-SISTANT CORRUGATED METAL HOSE

Series

软管能够适度的弯曲，具有很好的耐疲劳性能。

适用于全制冷剂，采用三位一体焊将接头、网套、压圈一起氩弧焊而成，具有安全、强度高、防腐、耐热。

具有良好的吸震和补偿热位移。

The hose can be moderately bent and has good fatigue resistance.

Suitable for all refrigerants, Trinity welding joint, mesh, ring with argon arc welding, with safety, high strength, corrosion resistance, heat resistance.

It has good shock absorption and compensation thermal displacement.



VAFX型避震管

VAFX Type vibration Eliminator



产品概述 Product Description

• VAFX型避震管是设计用于安装在制冷系统和空调的吸气和排气管路中，可降低由压缩机产生并通过系统管路传输的震动。

• VAFX Type vibration Eliminator is designed to be assembled in refrigeration or air conditioning system to lower the vibration from compressors.

产品特点 Features


- 波纹管材质为SUS316L，耐腐蚀性能优异。
- 采用三位一体焊将接头、网套、压圈一起氩弧焊，具有安全、强度高等特点。
- 具有良好的吸震和补偿热位移。

- SUS316L corrugated pipe supports with high corrosion resistance
- Trinity Argon Arc welding of wire sleeve, pipe connector and clamping ring makes the vibration eliminator stronger and more safety.
- Perfect vibration resistance and good compensation for the heat displacement.

技术参数 Technical Parameters

适用制冷剂 Applicable Refrigerants	HCFC/HFC
适用介质温度 Applicable Medium Temp	-40°C~+150°C
最大工作压力 MAX Working Pressure	见选型尺寸表(See Model Selection table)
最大耐压压力 Maximum Proof Pressure	最大工作压力的1.5倍(1.5 time of the M.W.P.)

外形结构 Configuration

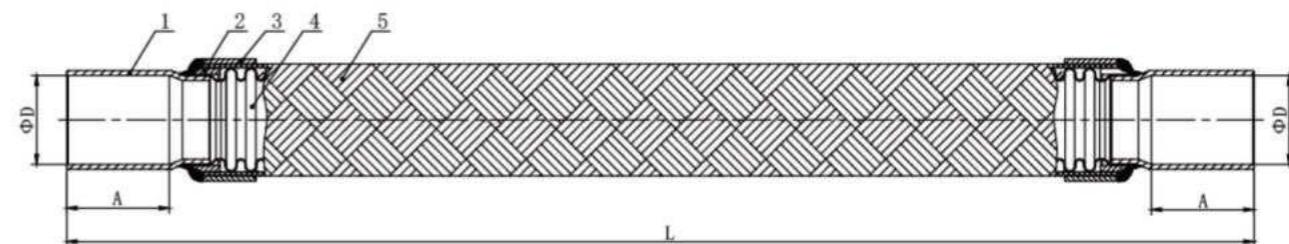

1.紫铜接管 Copper bush; 2.波纹管接头 Pipe Connector; 3.压圈 Clamping Ring.; 4.波纹管 Corrugated Pipe.; 5.网套 Wire Sleevering

选型表 Model Selection

型号 Type	规格 Size	外形尺寸 (mm) Outline Dimension (mm)			最大工作压力 (MPa) Max.Working Pressure (MPa)	最小弯曲半径 (mm) Min.Bending Radius (mm)	
		A	L	D		静态 Static(Rj)	动态 Dynamic(Rd)
VAFX-038-10	3/8	16	210	9.70 ^{+0.15} ₀	4.5	80	180
VAFX-012-12	1/2	16	230	12.80 ^{+0.2} ₀		95	215
VAFX-058-16	5/8	20	250	16.10 ^{+0.2} ₀		120	270
VAFX-034-19	3/4	22	260	19.10 ^{+0.2} ₀		145	325
VAFX-078-22	7/8	26	300	22.30 ^{+0.2} ₀		160	360
VAFX-100-25	1	31	330	25.60 ^{+0.2} ₀		175	400
VAFX-118-28	1-1/8	28	330	28.70 ^{+0.2} ₀		175	400
VAFX-114-32	1-1/4	50	400	32.10 ^{+0.2} ₀		225	510
VAFX-138-35	1-3/8	35	400	35.20 ^{+0.2} ₀		225	510
VAFX-158-42	1-5/8	42	400	41.50 ^{+0.20} ₀	3.0	280	640

VAF型避震管

VAF Type Vibration Eliminator



产品概述 Product Description

• VAF型避震管是设计用于安装在制冷系统和空调的吸气和排气管路中，可降低由压缩机产生并通过系统管路传输的震动。

• VAF Type vibration Eliminator is designed to be assembled in refrigeration or air conditioning system to lower the vibration from compressors.

产品特点 Features


- 波纹管材质为SUS316L，耐腐蚀性能优异。
- 采用三位一体焊将接头、网套、压圈一起氩弧焊，具有安全、强度高等特点。
- 波纹管与接头采用炉中钎焊，焊接质量稳定。
- 安装范围广(可安装于汽车空调系统)。
- 具有良好的吸震和补偿热位移。
- VAF型避震管已通过UL认证。

- SUS316L corrugated pipe supports with high corrosion resistance
- Trinity Argon Arc welding of wire sleeve, pipe connector and clamping ring makes the vibration eliminator stronger and more safety.
- Furnace brazing between the connector and the corrugated pipe provides steady welding quality.
- Wide application range(can be also adopted in automotive A/C)
- Perfect vibration resistance and good compensation for the heat displacement.
- VAF Type vibration Eliminator has been proved by UL.

技术参数 Technical Parameters

适用制冷剂 Applicable Refrigerants	HCFC/HFC
适用介质温度 Applicable Medium Temp	-40°C ~ +150°C
最大工作压力 MAX Working Pressure	见选型尺寸表(See Model Selection table)
最大耐压压力 Maximum Proof Pressure	最大工作压力的1.5倍(1.5 time of the M.W.P.)

外形结构 Configuration

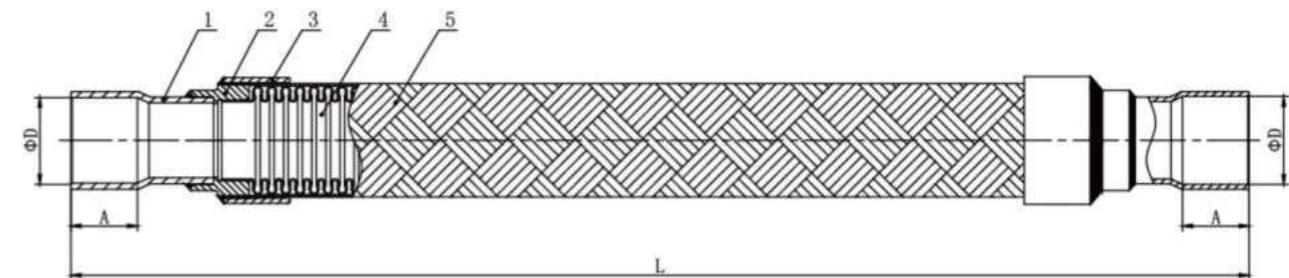

1.紫铜接管 Copper bush; 2.波纹管接头 Pipe Connector; 3.压圈 Clamping Ring.; 4.波纹管 Corrugated Pipe.; 5.网套 Wire Sleeving

选型表 Model Selection

型号 Type	规格 Size	外形尺寸 (mm) Outline Dimension (mm)			最大工作压力 (MPa) Max.Working Pressure (MPa)	最小弯曲半径 (mm) Min.Bending Radius (mm)	
		A	L	D		静态 Static(Rj)	动态 Dynamic(Rd)
VAF-038-10	3/8	16	230	9.70 ^{+0.15} ₀	6.0	80	180
VAF-012-12	1/2	10	250	12.80 ^{+0.2} ₀		95	215
VAF-058-16	5/8	12	270	16.10 ^{+0.2} ₀		120	270
VAF-034-19	3/4	14	290	19.10 ^{+0.2} ₀		145	325
VAF-078-22	7/8	17	300	22.30 ^{+0.2} ₀		160	360
VAF-100-25	1	24	330	25.60 ^{+0.2} ₀		175	400
VAF-118-28	1-1/8	24	330	28.70 ^{+0.2} ₀	5.0	175	400
VAF-114-32	1-1/4	38	380	32.10 ^{+0.2} ₀		225	510
VAF-138-35	1-3/8	25	380	35.20 ^{+0.2} ₀		225	510
VAF-158-42	1-5/8	30	430	41.50 ^{+0.25} ₀		4.5	280
VAF-218-54	2-1/8	65	520	54.20 ^{+0.25} ₀	2.3	350	800
VAF-258-67	2-5/8	75	610	66.80 ^{+0.25} ₀		390	845
VAF-318-79	3-1/8	80	680	79.60 ^{+0.25} ₀		480	1000

过滤器系列

DRY FILTER Series

REFRIGERATION A/C SYSTEM ACCESSORIES



100%3A固体滤芯，干燥能力强，不会相互移动，避免了粉末的产生。

25μm过滤精度，可在最小压降下保持高效过滤，耐腐蚀的表面粉末喷涂，可用于各种环境标准螺口及焊口连接，也可按用户需要定制可任意方向安装。

100% 3A filter cartridge with powerful drying capacity, not mutual mobile, avoid the powder production

With a filter fineness of 25 μm. Corrosion resistant powder coating finish is applicable to various environments. Threaded connection and welded connection is normal design and customer design is available. Could be mounted in any desirable direction.

BFK型双向过滤器 BFK Bidirectional Dry Filter


产品概述 Product Description
<ul style="list-style-type: none"> BFK型双向干燥过滤器用于制冷空调装置的液体管路上，用来干燥制冷剂（吸收系统的水分）及过滤系统内的固体杂质，以有效而安全地保护制冷空调系统。 BFK型双向过滤器的主要组分是80%分子筛+20%氧化铝和25μm滤棉。 BFK型双向干燥过滤器是80%分子筛+20%活性铝的固体滤芯，可用于HFC和HCFC制冷剂以及合成聚酯油（POE或PAG）系统。 <p>BFK bidirectional dry filter is used on the liquid piping of refrigeration and air conditioning unit to dry refrigerant (absorb water from system) and filter the solid from system in order to protect the refrigeration and air conditioning system for an efficient and safety operation.</p> <p>Model BFK bidirectional dry filter is composed of 80% 3A molecular sieve & 20% active aluminium with 25μm filter cartridge.</p> <p>The filter core of 80% molecular sieve & 20% active aluminium can be used for HFC and HCFC refrigerants and synthesized polyester oil (POE or PAG) system.</p>



产品特点 Features
<ul style="list-style-type: none"> BFK型双向干燥过滤器80%3A+20%氧化铝固体滤芯，干燥能力强，除酸能力强。 25μm过滤精度，可在最小压降下保持高效过滤，耐腐蚀的表面粉末喷涂，可用于各种环境标准螺口及焊口连接，也可按用户需要定制可任意方向安装。 Filter cartridge of 80% 3A molecular sieve and 20% active aluminium filter cartridge presents powerful drying capacity and powerful deacidification capacity. With a filter fineness of 25 μm. Corrosion resistant powder coating finish is applicable to various environments. Threaded connection and welded connection is normal design and customer design is available. Could be mounted in any desirable direction.

外形结构 Configuration

技术参数 Technical Parameters
适用制冷剂 Applicable Refrigerant: HCFC、HFC
适用介质温度 Applicable Medium Temperature: -40°C~+120°C
最大工作压力 Maximum Working Pressure: 4.5MPa
最大试验压力 Maximum Test Pressure: 6.75MPa

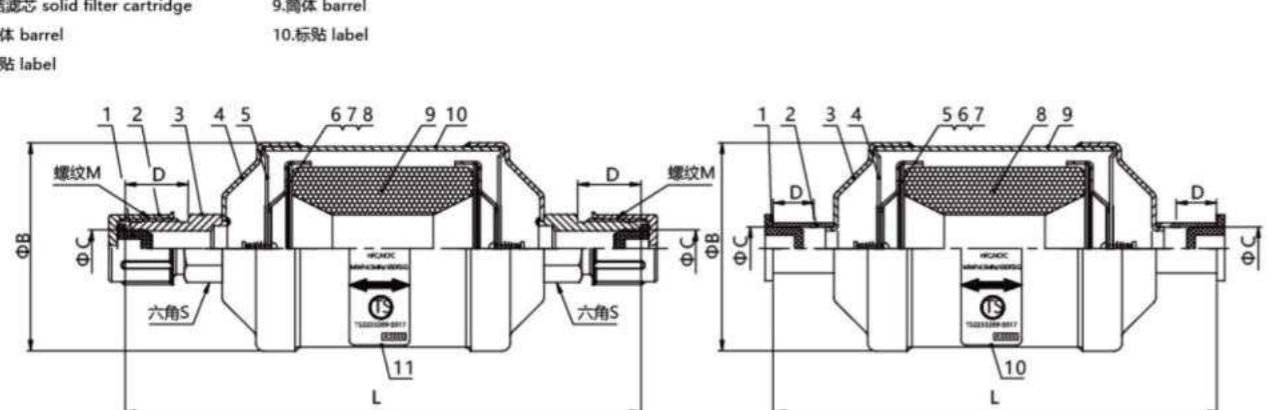

螺口 Thread

焊口 Welding

螺口 Thread			
型号 Model		规格 Size	
BFK-083	BFK-163	BFK-303	3/8 SAE
BFK-084	BFK-164	BFK-304	1/2 SAE
BFK-085	BFK-165	BFK-305	5/8 SAE
—	—	BFK-306	3/4 SAE
—	—	—	—
—	—	—	—

焊口 Soldering			
型号 Model		规格 Size	
BFK-083S	BFK-163S	BFK-303S	3/8 ODF
BFK-084S	BFK-164S	BFK-304S	1/2 ODF
BFK-085S	BFK-165S	BFK-305S	5/8 ODF
—	—	BFK-306S	3/4 ODF
—	—	BFK-307S	7/8 ODF
—	—	BFK-309S	1-1/8 ODF

SAE 接口 Flare connection							
型号 Model	接口 Connection	ΦB	ΦC	D	L	S	螺纹 Thread M
BFK-083	3/8 SAE	Φ66.5	Φ8	17	158	16	5/8-18UNF
BFK-084	1/2 SAE	Φ66.5	Φ10	19	165	19	3/4-16UNF
BFK-085	5/8 SAE	Φ66.5	Φ13	23.5	176	22	7/8-14UNF
BFK-163	3/8 SAE	Φ79	Φ8	17	170	16	5/8-18UNF
BFK-164	1/2 SAE	Φ79	Φ10	19	179	19	3/4-16UNF
BFK-165	5/8 SAE	Φ79	Φ13	23.5	186	22	7/8-14UNF
BFK-303	3/8 SAE	Φ79	Φ8	17	245	16	5/8-18UNF
BFK-304	1/2 SAE	Φ79	Φ10	19	254	19	3/4-16UNF
BFK-305	5/8 SAE	Φ79	Φ13	23.5	261	22	7/8-14UNF
BFK-306	3/4 SAE	Φ79	Φ16	25	265	27	1-1/16-14UNS

ODF 接口 Welding connection					
型号 Model	接口 Connection	ΦB	ΦC	D	L
BFK-083S	3/8 ODF	Φ66.5	Φ9.7	9	141
BFK-084S	1/2 ODF	Φ66.5	Φ12.8	11	149
BFK-085S	5/8 ODF	Φ66.5	Φ16.1	11	149
BFK-163S	3/8 ODF	Φ79	Φ9.7	9	153
BFK-164S	1/2 ODF	Φ79	Φ12.8	11	161
BFK-165S	5/8 ODF	Φ79	Φ16.1	11	161
BFK-303S	3/8 ODF	Φ79	Φ9.7	9	228
BFK-304S	1/2 ODF	Φ79	Φ12.8	11	236
BFK-305S	5/8 ODF	Φ79	Φ16.1	11	236
BFK-306S	3/4 ODF	Φ79	Φ19.1	12	241
BFK-307S	7/8 ODF	Φ79	Φ22.3	15	247
BFK-309S	1-1/8 ODF	Φ79	Φ28.7	16	256

DFS型干燥过滤器 Model DFS Dry Filter


产品概述 Product Description	
<ul style="list-style-type: none"> • DFS型干燥过滤器用于制冷空调装置的液体管路上，用来干燥制冷剂（吸收系统的水份）及过滤系统内的固体杂质、以有效而安全地保护制冷空调系统。 • DFS型干燥过滤器的主要组分是100%3A分子筛和25μm滤棉。 • DFS型干燥过滤器的分子筛是100%3A固体滤芯，可用于HFC和HCFC制冷剂以及合成聚酯油（POE或PAG）系统。 • Model DFS dry filter is used on the liquid piping of refrigeration and air conditioning unit to dry refrigerant (absorb water from system) and filter the solid from system in order to protect the refrigeration and air conditioning system for an efficient and safety operation. • Model DFS dry filter is composed of 100% 3A molecular sieve and 25μm filter cartridge. • Model DFS dry filter's molecular sieve is 100% 3A solid filter cartridge. This solid filter is used for HFC and HCFC refrigerants and synthesized polyester oil (POE or PAG) system. 	




产品特点 Features	
<ul style="list-style-type: none"> • 100%3A固体滤芯，干燥能力强，不会相互移动，避免了粉末的产生。 • 25μm过滤精度，可在最小压降下保持高效过滤，耐腐蚀的表面粉末喷涂。 • 可用于各种环境标准螺口及焊口连接，也可按用户需要定制可任意方向安装。 	<ul style="list-style-type: none"> • 100% 3A filter cartridge with powerful drying capacity, not mutual mobile, avoid the powder production. • With a filter fineness of 25 μm. Corrosion resistant powder coating finish is applicable to various environments. Threaded connection and welded connection is normal design and customer design is available. Could be mounted in any desirable direction.

外形结构 Configuration	
<p>螺口 Thread:</p> <ol style="list-style-type: none"> 1.橡胶塞 rubber plug 2.螺纹封帽 thread cap 3.铁接头 steel connector 4.铁碗 steel cup 5.挡片 barrier 6.烧结滤芯 solid filter cartridge 7.滤棉 filter pad 8.滤网 filter net 9.标贴 label 	<p>焊口 Soldering:</p> <ol style="list-style-type: none"> 1.橡胶塞帽 rubber plug hat 2.接管 welding pipe 3.铁碗 steel cup 4.挡片 barrier 5.烧结滤芯 solid filter cartridge 6.滤棉 filter pad 7.滤网 filter net 8.标贴 label

技术参数 Technical Parameters	
适用制冷剂 Applicable Refrigerant:	HCFC、HFC
适用介质温度 Applicable Medium Temperature:	-40°C ~ +120°C
最大工作压力 Maximum Working Pressure:	4.5MPa
最大试验压力 Maximum Test Pressure:	6.75MPa

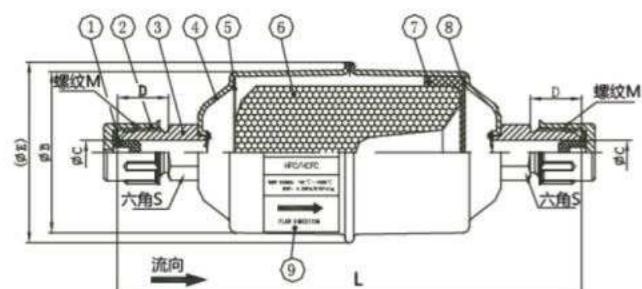

螺口 Flare

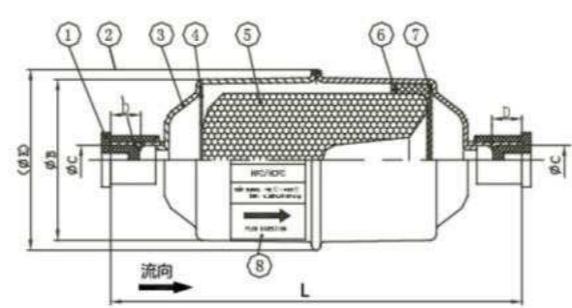

焊口 Welding

螺口 Flare				
型号 Model			规格 Size	
DFS-052	—	—	—	1/4 SAE
DFS-053	DFS-083	DFS-163	—	3/8 SAE
—	DFS-084	DFS-164	DFS-304	1/2 SAE
—	DFS-085	DFS-165	DFS-305	5/8 SAE
—	—	—	DFS-306	3/4 SAE
—	—	—	—	—
—	—	—	—	—

焊口 Welding				
型号 Model			规格 Size	
DFS-052S	—	—	—	1/4ODF
DFS-053S	DFS-083S	DFS-163S	—	3/8ODF
—	DFS-084S	DFS-164S	DFS-304S	1/2ODF
—	DFS-085S	DFS-165S	DFS-305S	5/8ODF
—	—	—	DFS-306S	3/4ODF
—	—	—	DFS-307S	7/8ODF
—	—	—	DFS-309S	1-1/8ODF

SAE 接口 Flare connection								
型号 Model	接口 Connection	ΦB	ΦC	D	ΦE	L	S	螺纹 Thread M
DFS-032	1/4 SAE	Φ43	Φ4.8	14	Φ46	110	14	7/16-20UNF
DFS-033	3/8 SAE	Φ43	Φ8	17	Φ46	119	16	5/8-18UNF
DFS-052	1/4 SAE	Φ54	Φ4.8	14	Φ57	118	14	7/16-20UNF
DFS-053	3/8 SAE	Φ54	Φ8	17	Φ57	127	16	5/8-18UNF
DFS-083	3/8 SAE	Φ54	Φ8	17	Φ57	152	16	5/8-18UNF
DFS-084	1/2 SAE	Φ54	Φ10	19	Φ57	159	19	3/4-16UNF
DFS-085	5/8 SAE	Φ54	Φ13	23.5	Φ57	170	22	7/8-14UNF
DFS-163	3/8 SAE	Φ75	Φ8	17	Φ79	159	16	5/8-18UNF
DFS-164	1/2 SAE	Φ75	Φ10	19	Φ79	166	19	3/4-16UNF
DFS-165	5/8 SAE	Φ75	Φ13	23.5	Φ79	177	22	7/8-14UNF
DFS-304	1/2 SAE	Φ79	Φ10	19	Φ79	256	19	3/4-16UNF
DFS-305	5/8 SAE	Φ79	Φ13	23.5	Φ79	267	22	7/8-14UNF
DFS-306	3/4 SAE	Φ79	Φ16	25	Φ79	268	27	1-1/16-UNS

ODF 接口 Welding connection						
型号 Model	接口 Connection	ΦB	ΦC	D	ΦE	L
DFS-032S	1/4 ODF	Φ43	Φ6.5	8	Φ46	99
DFS-033S	3/8 ODF	Φ43	Φ9.7	9	Φ46	101
DFS-052S	1/4 ODF	Φ54	Φ6.5	8	Φ57	107
DFS-053S	3/8 ODF	Φ54	Φ9.7	9	Φ57	109
DFS-083S	3/8 ODF	Φ54	Φ9.7	9	Φ57	134
DFS-084S	1/2 ODF	Φ54	Φ12.8	11	Φ57	142
DFS-085S	5/8 ODF	Φ54	Φ16.1	11	Φ57	142
DFS-163S	3/8 ODF	Φ75	Φ9.7	9	Φ79	142
DFS-164S	1/2 ODF	Φ75	Φ12.8	11	Φ79	150
DFS-165S	5/8 ODF	Φ75	Φ16.1	11	Φ79	150
DFS-304S	1/2 ODF	Φ79	Φ12.8	11	Φ79	239
DFS-305S	5/8 ODF	Φ79	Φ16.1	11	Φ79	239
DFS-306S	3/4 ODF	Φ79	Φ19.1	12	Φ79	244
DFS-307S	7/8 ODF	Φ79	Φ22.3	15	Φ79	250
DFS-309S	1-1/8 ODF	Φ79	Φ28.7	16	Φ79	259

DFS型干燥过滤筒

Model DFS Replaceable Dry Filter Cartridge



选型表 Model Selection

型号 Type	进出口尺寸 Connections To solder ID (inch)	芯体数量 Number of cores	过滤面积(m²) Filtering surface(m²)	尺寸 Dimensions (mm)		
				A	B	C
DFS-485S	5/8ODF	1	420	234	153	85
DFS-486S	3/4ODF			234	153	85
DFS-487S	7/8ODF			234	153	85
DFS-489S	1-1/8ODF			236	155	87
DFS-4811S	1-3/8ODF			240	159	91
DFS-4813S	1-5/8ODF			242	161	93
DFS-4817S	2-1/8ODF			246	160	99
DFS-4821S	2-5/8ODF			244	158	106
DFS-967S	7/8ODF	2	840	376	295	85
DFS-969S	1-1/8ODF			378	297	87
DFS-9611S	1-3/8ODF			382	301	91
DFS-9613S	1-5/8ODF			384	303	93
DFS-9617S	2-1/8ODF			388	302	99
DFS-9621S	2-5/8ODF			386	300	106
DFS-1449S	1-1/8ODF	3	1260	520	439	87
DFS-14411S	1-3/8ODF			524	443	91
DFS-14413S	1-5/8ODF			526	445	93
DFS-14417S	2-1/8ODF			530	444	99
DFS-14421S	2-5/8ODF			528	442	106

产品概述 Product Description

- DFS型干燥过滤筒安装在系统的液、汽管路中，可有效去除残留的污染物，从而保护压缩机，延长其使用寿命。
- DFS型干燥过滤筒是可更换滤芯的，最大的特点是用于吸附压缩机马达烧毁后进入系统中大量的水分。

- Model DFS dry filter cartridge is installed on the liquid and vapor piping, which could effectively remove any residual contaminant to protect compressor for a longer service life.
- The filter element of Model DFS dry filter cartridge is replaceable and it is capable to absorb large amount of water in the system in case the compressor motor burns up.



产品特点 Features

- 可拆式结构，便于安装及维修；
- 100目出口滤网；
- 全流通设计，最大限度的减少压降；
- 钢制壳体，铜接管焊接接口，高频焊接采用翻边结构，增加焊接可靠性；
- 改性聚四氟乙烯新型材料，确保密封性；
- 外涂层采用环氧树脂静电喷漆。

- Removable structure for convenient installation and maintenance;
- 100 mesh outlet filter screen;
- Full pass through design to minimize pressure drop;
- Steel casing, copper pipe welded connection, high frequency welding flanging structure to improve welding reliability;
- Modified Teflon new material to ensure perfect sealing;
- Outer surface applies epoxy resin coating protection.

技术参数 Technical Parameters

适用制冷剂 Suitable Refrigerants	HCFC, HFC, CFC
适用介质温度 Suitable Medium Temperature	-35°C ~ +70°C
最大工作压力 Maximum Working Pressure	4.2MPa
最大试验压力 Maximum Test Pressure	6.3MPa

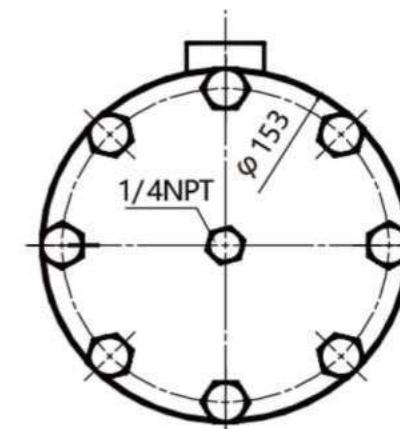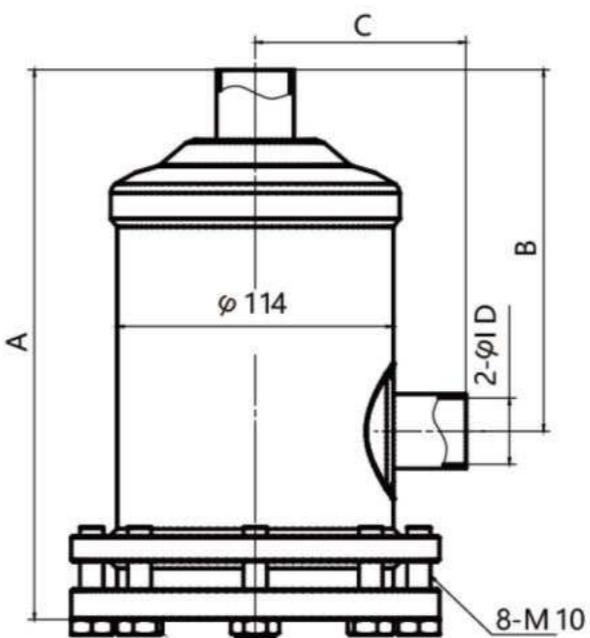

技术参数表 Technical Parameters		ARI标准状态下的额定值 Rating under Ari Standard Condition														选择推荐值(Kw) Recommended value							
型号 Type		水溶液——点滴数 Water volume-number of drop								制冷剂流过能量 refrigerant flow through energy						制冷 refrigeration		空调 air conditioning					
		制冷剂 Refrigerant R12 15PPM		制冷剂 Refrigerant R134a 80PPM		制冷剂 Refrigerant R22 60PPM		制冷剂 Refrigerant R404a/507 50PPM		制冷剂 Refrigerant R502 30PPM		压差 pressure differential=0.014mpa						商用制冷及低温设备 Commercial refrigeration and cryo genic equipment		现场更换现场 装配系统 Replacement site. Site assembly system.			
		25°C	50°C	25°C	50°C	25°C	50°C	25°C	50°C	25°C	50°C	R12	R134a	R22	R404a/507	R502	R12/R134a	R22	R404a/502507	R12/R134a	R22		
DFS-485S		25.6	27.2	22.0	18.4	17.4	14.4	20.4	15.5	18.2	14.1	53.5	64.7	70.3	52.8	45	26.4	35.2	26.4	26.4	35.2		
DFS-487S		25.6	27.2	22.0	18.4	17.4	14.4	20.4	15.5	18.2	14.1	89.7	209	116	87.9	75.3	42.2	52.8	35.2	42.2	52.8		
DFS-489S		25.6	27.2	22.0	18.4	17.4	14.4	20.4	15.5	18.2	14.1	162	195	211	158	136	42.2	52.8	35.2	52.8	70.3		
DFS-4811S		25.6	27.2	22.0	18.4	17.4	14.4	20.4	15.5	18.2	14.1	183	234	250	230	197	42.2	52.8	35.2	52.8	70.3		
DFS-4813S		25.6	27.2	22.0	18.4	17.4	14.4	20.4	15.5	18.2	14.1	192	274	299	197	180	47.8	48.2	42.2	56.3	74.6		
DFS-4817S		25.6	27.2	22.0	18.4	17.4	14.4	20.4	15.5	18.2	14.1	205	310	338	236	217	49.3	64.9	74.1	60.2	78.5		
DFS-4821S		25.6	27.2	22.0	18.4	17.4	14.4	20.4	15.5	18.2	14.1	237	336	347	269	239	52.7	67.3	49.7	63.3	80.2		
DFS-967S		51.2	44.3	44.0	36.8	34.7	28.8	40.8	30.9	36.3	28.2	147	177	190	144	123	70.3	87.9	52.8	70.3	87.9		
DFS-969S		51.2	44.3	44.0	36.8	34.7	28.8	40.8	30.9	36.3	28.2	183	220	236	176	153	87.9	128	87.9	87.9	123		
DFS-9611S		51.2	44.3	44.0	36.8	34.7	28.8	40.8	30.9	36.3	28.2	211	255	276	195	187	111.5	152	111.1	111.1	155		
DFS-9613S		51.2	44.3	44.0	36.8	34.7	28.8	40.8	30.9	36.3	28.2	263	297	311	232	213	123.1	194	134.5	134.5	190		
DFS-9617S		51.2	44.3	44.0	36.8	34.7	28.8	40.8	30.9	36.3	28.2	293	332	329	367	303	135.1	203	157	156	208		
DFS-9621S		51.2	44.3	44.0	36.8	34.7	28.8	40.8	30.9	36.3	28.2	326	352	347	393	314	157	220	191	173	232		
DFS-1449S		76.8	66.5	66.0	55.2	52.1	43.2	61.2	46.4	54.5	42.3	220	265	285	215	184	106	141	106	106	141		
DFS-14411S		76.8	66.5	66.0	55.2	52.1	43.2	61.2	46.4	54.5	42.3	254	305	327	246	212	141	176	123	141	176		
DFS-14413S		76.8	66.5	66.0	55.2	52.1	43.2	61.2	46.4	54.5	42.3	282	374	358	270	245	183	205	134	173	206		
DFS-14417S		76.8	66.5	66.0	55.2	52.1	43.2	61.2	46.4	54.5	42.3	310	431	392	301	279	224	236	156	205	247		
DFS-14421S		76.8	66.5	66.0	55.2	52.1	43.2	61.2	46.4	54.5	42.3	441	469	432	486	416	243	257	182	216	264		
DFS-19211S		102	88.6	88.0	73.6	69.4	57.6	81.6	61.8	72.6	56.4	322	387	415	313	269	176	246	176	176	246		
DFS-19213S		102	88.6	88.0	73.6	69.4	57.6	81.6	61.8	72.6	56.4	373	447	478	362	312	211	281	193	211	287		
DFS-19217S		102	88.6	88.0	73.6	69.4	57.6	81.6	61.8	72.6	56.4	390	471	503	380	327	229	229	211	229	229		
DFS-19221S		102	88.6	88.0	73.6	69.4	57.6	81.6	61.8	72.6	56.4	423	495	528	498	342	243	243	232	241	325		

I knew that if I failed I wouldn't regret that, but I knew the one thing I might regret is not trying.

— Jeff Bezos, Entrepreneur

我知道我如果失败了, 我不会后悔, 但我知道我可能会后悔的是, 没有去尝试。

— 杰佛瑞·贝佐斯 (企业家)

YL 型油流量开关

YL TYPE OIL FLOW SWITCH

Series

REFRIGERATION A/C SYSTEM ACCESSORIES

不需要外部供电
世界知名磁簧开关品牌, 可靠性高
硅橡胶引出线, 耐油性能好
带用于管路焊接的钎焊接头

No need for external power supply;
Apply world-renowned reed switch, high reliability;
Silicone rubber lead wire, good oil resistance;
With brazing joints for pipeline welding;



YL 型油流量开关 YL type oil flow switch



产品概述 Product Description

• 磁性活塞在流体推力作用下压缩弹簧，流体流量达到设定值时触发阀内部的磁簧开关，形成电气回路输出信号。当流体流量小时，磁簧开关断开，电信号断开。主要用于水与油介质的流量监控。

• The magnetic piston compresses the spring under the action of the fluid thrust, the reed switch will be turned on when the fluid flow reaches the set value, then electrical circuit output signal will be formed to control the valve. When the fluid flow decreases, the reed switch will be turned off and the electrical signal will be off. Mainly applied for flow monitoring of water and oil media.

特点 Features

- 不需要外部供电;
- No need for external power supply;
- 世界知名磁簧开关品牌，可靠性高;
- Apply world-renowned reed switch, high reliability;
- 硅橡胶引出线，耐油性能好;
- Silicone rubber lead wire, good oil resistance;
- 带用于管路焊接的钎焊接头;
- With brazing joints for pipeline welding;


技术参数 Technical Parameters

适用介质 Applicable media	油、水 water, oil
环境温度 Ambient temperature	-20~+70°C
介质温度 Medium temperature	-20~+110°C
开关形式 Switch form	常开 Normal open
额定电压 Rated voltage	AC 220V
电流 Current	Max.1A
触点容量 Contact rating	70AV / 50W
防护等级 Protection level	IP65
线长 Cable length	1M

造型表 Model Selection

规格 Model	耐压 (Bar) Working pressure	最大流量(L/min) ^{t1} MAX. Flow	断开值 (L/min) Cut-off value	重量 (Kg) Weight
YL15-040-16	200	15	4±0.3	0.7
YL15-060-19			6±0.3	
YL15-100-22		20	10±0.3	

外形尺寸 Dimensions

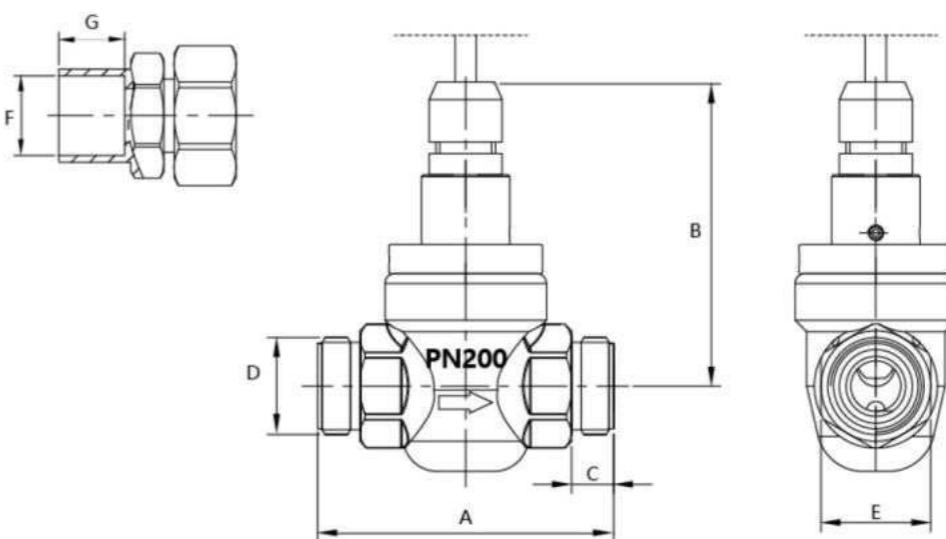

型号 Model	A	B	C	D	E	F	G
YL15-040-16	77	78	11	1"-14UNS	29	ø16.2	16
YL15-060-19	77	78	11	1"-14UNS	29	ø19.2	16
YL15-100-22	77	78	11	1"-14UNS	29	ø22.3	16

直角阀 Right angle valve



产品概述 Product Description

直角阀是手动调节的截止阀，适用于90度角型流动，用于冷冻、冷藏和空调调节装置的液体、暖气和热气管路上。采用阀杆硬密封和阀帽密封两个特有的密封组件设计，并选用特殊的密封材质，保证了产品在常用制冷工质环境应用下良好运行。

Right angle valve is a manually adjusted cut off valve, which suitable for 90 degree angle flow, the valve is used in the liquid, heating and hot gas piping for refrigeration, refrigerated and air-regulating device. The two special sealing components of valve stem seal and valve cap seal is used, and choose special sealing materials to ensure that the product is running well under the application of common refrigeration working quality environment.

特点 Features

- | | |
|---|---|
| <ul style="list-style-type: none"> • 90度角型流动，便于转角安装。 • 精密锻造优质铜材阀体。 • 凡尔线阀口设计，密封可靠。 • 特选兼容常用制冷工质运行环境的密封圈。 • 阀杆部位具有二次可靠密封结构。 | <ul style="list-style-type: none"> • 90 degree Angle steering flow for easy corner installation. • Precision forged high quality copper valve body. • Vere line valve port design, reliable sealing. • Selected seals compatible with common refrigerant operating environments. • The valve stem part has a secondary reliable sealing structure. |
|---|---|

技术参数 Technical Parameters

最大工作压力: 4.5MPa	Maximum work pressure: 4.5MPa
适用制冷剂: R22/R407C、R134a、R404A/R507、R410A	Applicable refrigerant: R22/R407C, R134a, R404A/R507, R410A
适用介质工作温度: -40°C ~ +150°C	Applicable medium working temperature: -40°C ~ +150°C


选型表 Selection

HS直角阀				HS油路直角阀			
型号 Model	最小通径(mm) Minimum diameter(mm)	连接螺纹 Connection thread	Kv值(m³/h) Kv Value(m³/h)	型号 Model	最小通径(mm) Minimum diameter(mm)	连接螺纹 Connection thread	Kv值(m³/h) Kv Value(m³/h)
HS-L-022	φ4.8	Upper 1/4SAE-down NPT1/4	0.4	HS-OL-022	φ4.8	Upper 1/4SAE-down 1/4SAE	0.4
HS-L-032	φ5.5	Upper 3/8SAE-down NPT1/4	0.5	HS-OL-023	φ4.8	Upper 1/4SAE-down 3/8SAE	0.4
HS-L-023	φ4.8	Upper 1/4SAE-down NPT3/8	0.4	HS-OL-033	φ5.5	Upper 3/8SAE-down 3/8SAE	0.5
HS-L-033	φ7	Upper 3/8SAE-down NPT3/8	0.8	HS-OL-W022	φ3.5	Upper 1/4SAE-down 1/4SAE	0.3
HS-L-044	φ8.5	Upper 1/2SAE-down NPT1/2	1.3	HS-OL-W032	φ4.8	Upper 3/8SAE-down 1/4SAE	0.4
HS-L-066	φ11.5	Upper 3/4SAE-down NPT3/4	3.5	HS-OL-W033	φ5.5	Upper 3/8SAE-down 3/8SAE	0.5


• Kv值: 密度为1吨/m³的水在通过电磁阀的压差等于100KPa时的流量, 单位为m³/h;
• 气态介质的MOPD约0.1MPa。

• Kv value: The flow of water with a density of 1 ton/m when the pressure difference between the solenoid valve is equal to 100kPa, the unit is M³/H;
• Mopd of the gaseous medium is about 0.1MPa high.

结构 Structure

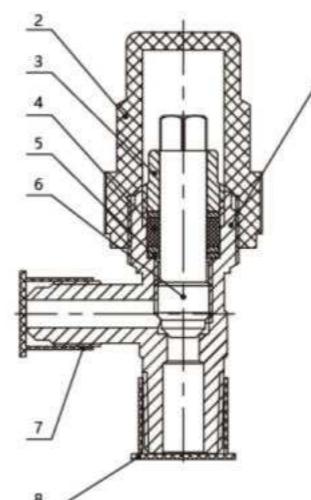


1. Valve body 阀体
2. Valve cap 阀帽
3. Crusher screw 压紧螺丝
4. Sealing ring 密封圈
5. washer 垫圈
6. Valve stem 阀杆
7. Protective cap 防护帽
8. Protective cap 防护帽

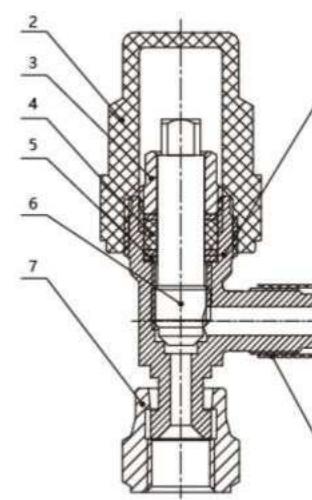


1. Valve body 阀体
2. Valve cap 阀帽
3. Crusher screw 压紧螺丝
4. Sealing ring 密封圈
5. washer 垫圈
6. Valve stem 阀杆
7. Nuts 铆钉
8. Protective cap 防护帽

外形尺寸 Overall Dimension

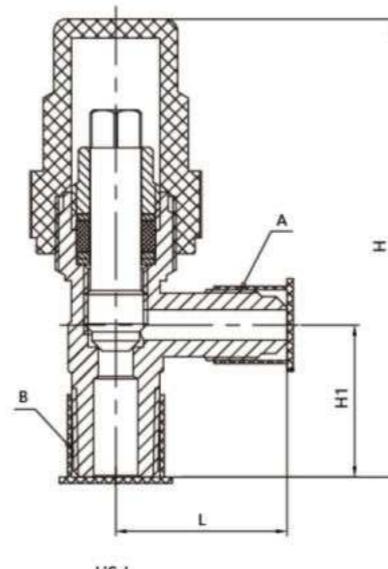

HS-L

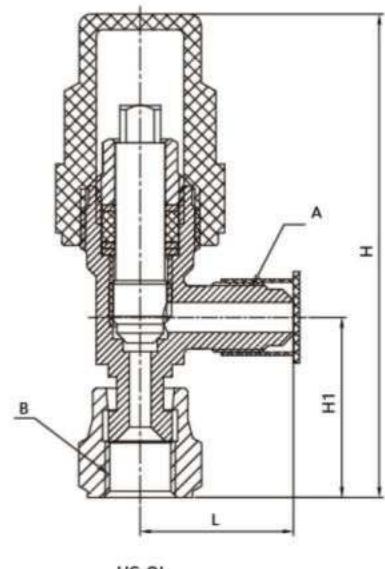

HS-OL

压力传输配件系列


FITTING
Series

高端压力表, 功能强大, 附件配套齐全, 使用便捷。
高品质密封材料, 使用多种冷媒。

High class pressure gauge,
complete accessories arrange,
quality sealing material,
available for more refrigerants.



充油(真空)压力表 Oil-filled(vacuum)Pressure Gauge

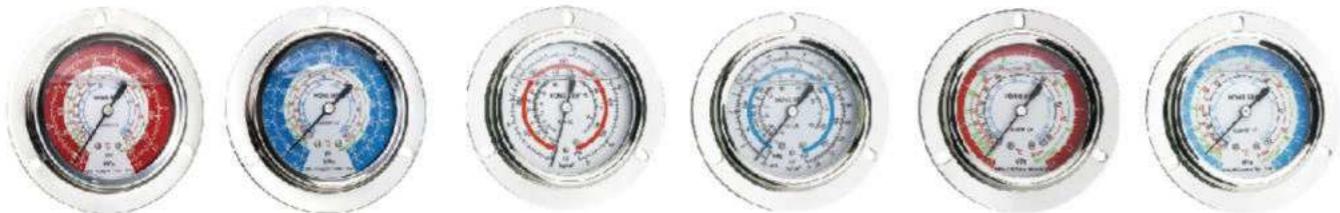

242# (Y63)

(-5°C ~ +120°C)

128# (ZY63)

(-40°C ~ +120°C)

191# (ZY63)

(-40°C ~ +120°C)

产品概述 Product Description

- 充油压力表是内部充油的制冷专用的抗振压力表。
- 充油压力表用于冷冻、冷藏和空调调节装置的机组上。
- 充油压力表由多种制冷剂共组一表，方便使用。
- 充油压力表使用全不锈钢表壳、超宽玻青铜弹簧管。
- 充油压力表为带法兰安装边的轴向压力表。

- The pressure gauge is a vibration-proof pressure gauge with oil filled inside for refrigeration use only.
- The oil-filled pressure gauge is used on freezer, cold store and air-conditioning unit.
- The oil-filled pressure gauge is convenient in application as it features one gauge for multiple refrigerants.
- The oil-filled pressure gauge has full stainless steel casing and wider beryllium bonze spring tube.
- The oil-filled pressure gauge is an axial pressure gauge with edges for flange joint.

产品特点 Features


- 内部充油可抗机组的高频振动
- 带阻尼油杯可防指针快速跳动
- 带法兰安装边方便安装
- 设有超压限位装置
- 经强化超压确保零位误差
- 合理的油封设计无漏油隐患
- 设有压力温度对照
- 具有超长的使用寿命

- The inside filled oil functions damping to the high frequency vibration of machinery.
- The damping oil cup prevents gauge pointer from quick jumping.
- The flanged edge is for convenient mounting.
- Over-pressure limit stop is equipped.
- Zero error is ensured with strengthening overpressure measures.
- Rational oil seal design and no oil leakage worry.
- Pressure versus Temperature readings for easy use.
- Extra long service life.

技术参数 Technical Parameters

适用制冷剂 Applicable Refrigerant	HCFC and HFC
适用介质温度 Applicable Medium Temperature	-5°C ~ +120°C (-40°C ~ +120°C)
接口尺寸 Connection Size	1/4SAE
结构型式 Structure	轴向同心嵌装式 Axial concentrically-embedded
外壳公称直径 Casing Nominal Diameter	2.5 in(Φ63.5)
精度等级 Accuracy Class	1.6级

外形尺寸 Overall Dimension

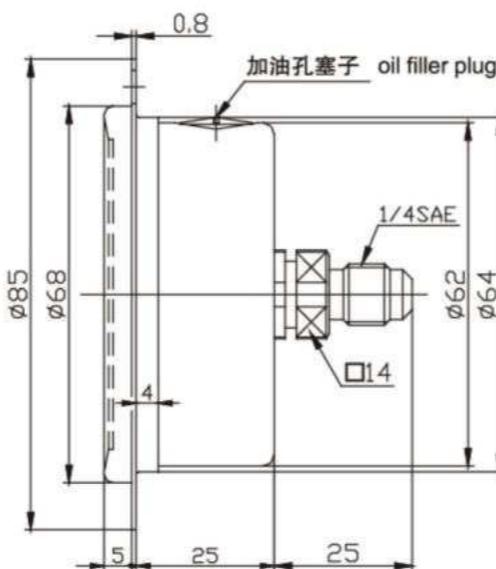

型号 model 充油(真空)压力表 Oil-filled (vacuum) pressure Gauge


技术参数 Technical Parameters	编号 Code Number: 242#	编号 Code Number: 128#	编号 Code Number: 191#
	接口 Connector: 1/4SAE (ZY63)	接口 Connector: 1/4SAE (ZY63)	接口 Connector: 1/4SAE (ZY63)
适用制冷剂 Application:	R22 R134a R404A R407C	适用制冷剂 Application:	R410A
特点 Features			<ul style="list-style-type: none"> 进口高精度压力表机芯 特殊的超压限位装置 自动调零装置

充注阀 Charging valve


外形结构 Configuration



A型

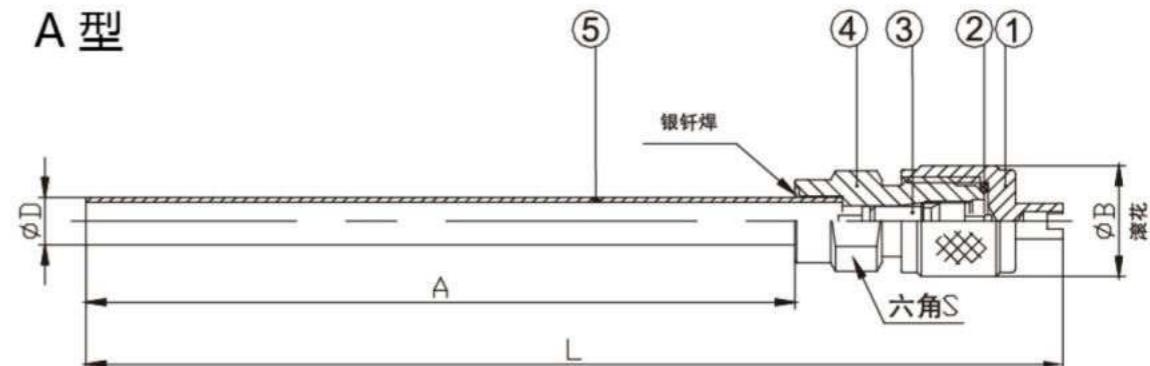

B型

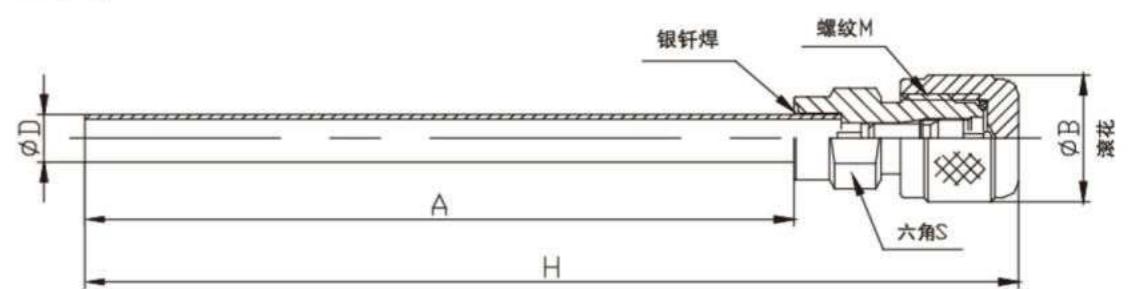

产品概述 Product Description

- 充注阀是一种带气门芯的单向检修用阀。
- 充注阀用于冷冻、冷藏和空调调节装置的各个部位。

- The charging valve is an one-way service valve with valve inside.
- The charging valve is used on the freezer, cold store and air-conditioning unit.

产品特点 Features

- 采用优质供应商气门芯，性能可靠。
- 双重密封确保无泄漏。
- 可提供各种长度和硬度的铜接管。
- 阀帽滚花设计，装卸方便。

- Equipped with imported valve inside of reliable performance.
- Double sealing ensure leak-tight.
- Copper tube of various lengths and hardness are available.
- Valve bonnet is knurled for easy handling.

技术参数 Technical Parameters

适用制冷剂 Applicable Refrigerant

HCFC and HFC

适用介质温度 Applicable Medium Temperature

-25°C ~ +120°C

最大工作压力 Max. Operating Pressure

3.0MPa

最大耐压压力 Max. Allowable Pressure

4.5MPa

选型表 Model Selection

型号 Type	接口 Connection	规格 Size	外形尺寸 Overall Dimension					六角 Hexagonal S	螺纹 Thread M	重量(g) Weight(g)
			A	B	ΦD	H	L			
Type A	1/4SAE	1/8	60	14	3.17	--	94	11	7/16-20UNF	22
	1/4SAE	3/16	60	14	4.76	--	94	11	7/16-20UNF	23
	1/4SAE	1/4	90	14	6.35	--	124	11	7/16-20UNF	28
Type B	1/4SAE	1/4	90	14	6.35	118	---	12	7/16-20UNF	30
	1/2SAE	1/4	90	16	6.35	118	---	14	1/2-20UNF	39
	1/2SAE	1/4	90	16	6.35	118	---	14	1/2-16UNF	40

注：A、H、L长度也可按客户要求定制

HMG型高压毛细软管 接头类

Type HMG High Pressure Hose and Fittings

产品概述 Product Description

- HMG型高压软管是柔性连接件，主要用于冷冻、冷藏及空气调节装置的压缩机吸排气管。
- Type HMG hose is a flexible connection piece and it is mainly used as compressor suction and/or exhaust tube in the refrigeration, cold storage and air conditioning facilities.


产品特点 Features

- 采用优质尼龙、聚酯材料制作，产品耐高压、耐高温、耐老化性能强，内壁光滑，介质流阻小。代替钢管焊接不牢固，容易振动失漏，无法维修，噪音大等缺点，而且节省系统连接时间，长度任意取舍，技术可靠性大大提高。
- Made of high quality nylon and polyester. High pressure resistance, high temperature resistance and high ageing resistance. Small flow resistance due to its smooth internal wall. Eliminate the shortcomings of copper tube such as soldering failure, leakage, noise and difficult service. Selectable length at ease and short the connection operation time, improve the technical reliability obviously.

技术参数 Technical Parameters

适用制冷剂 Applicable Refrigerant	HCFC and HFC
适用介质温度 Applicable Medium Temperature	-40°C~+100°C

选型表 Model Selection

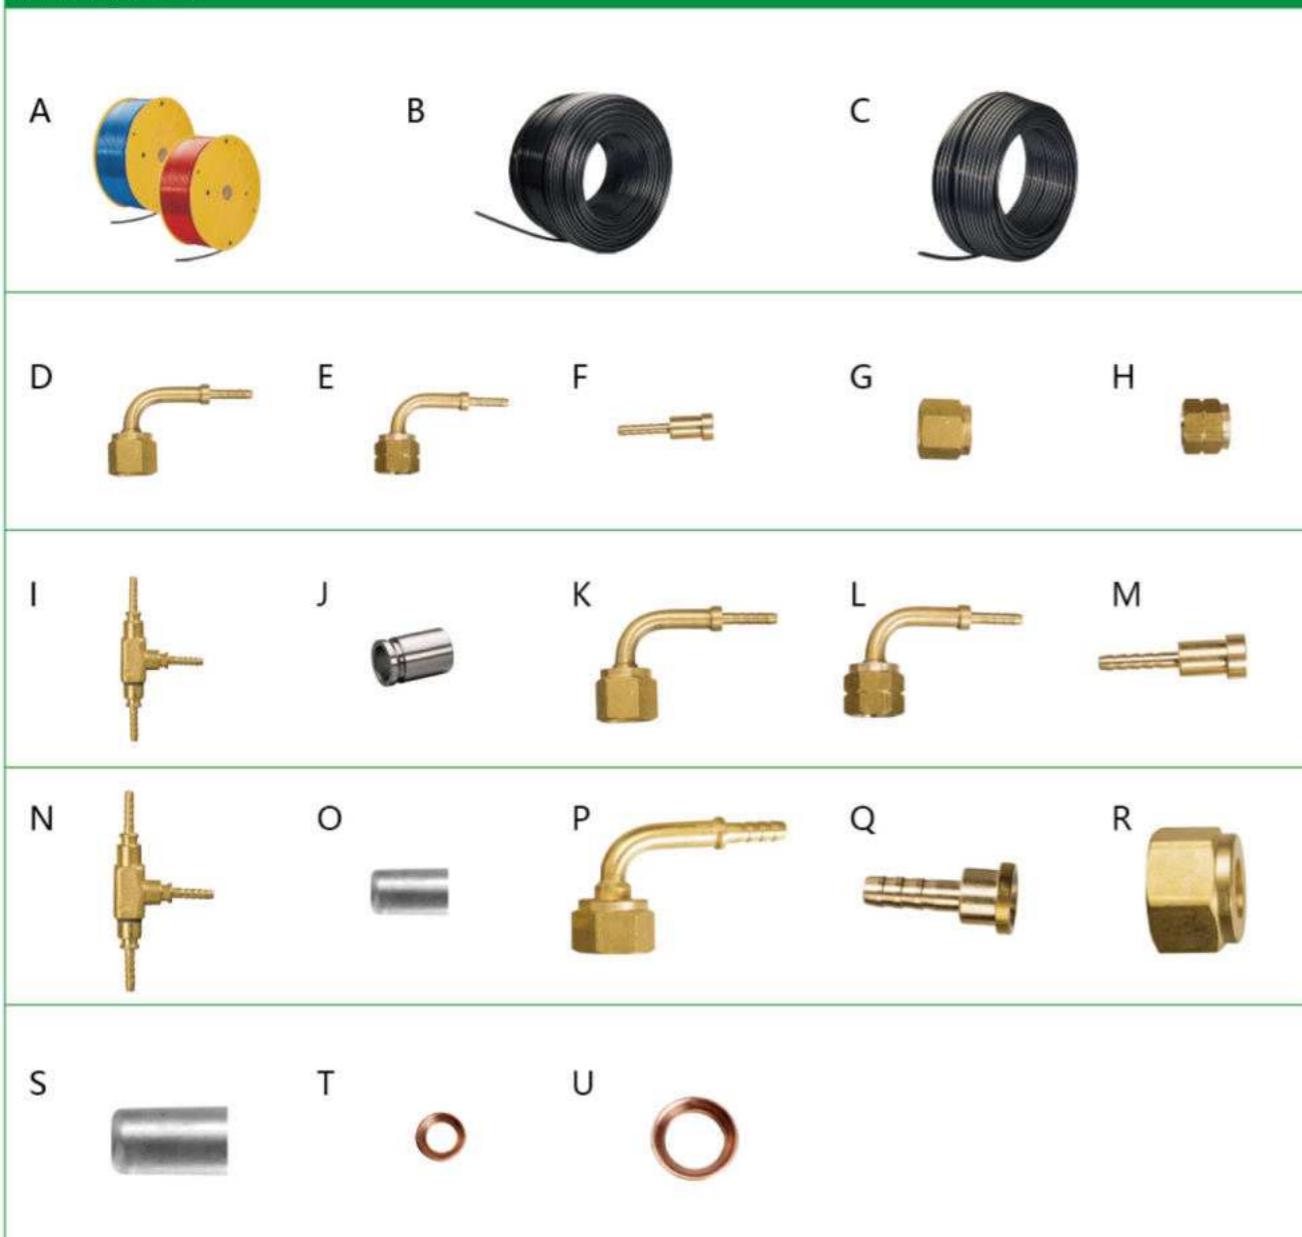


选型表 Model Selection

编号 Code	型号规格 Type	名称 Description	内径 ID	外径 OD	最大工作压力 MPa Max Working Pressure MPa	爆破试验压力 MPa Blasting Test Pressure MPa
A	HS-HMG-2	高压软管 high pressure hose Φ2	Φ2.5	Φ5.6	5.5	30
B	HS-HMG-4	高压软管 high pressure hose Φ4	Φ3.4	Φ7.8	5.5	30
C	HS-HMG-8	高压软管 high pressure hose Φ8	Φ6.2	Φ10.5	4.2	20
D	Φ2.6×1/4"	弯芯90° 带纳子 90° bend core with 1/4" nut 1/4"	Φ1.0	Φ2.6		
E	Φ2.6×Dg4	弯芯90° 带纳子Dg4 90° bend core with Dg4 nut	Φ1.0	Φ2.6		
F	Φ2.6	直芯 straight core	Φ1.0	Φ2.6		
G	1/4"	纳子1/4" 1/4" nut				
H	Dg4	纳子 Dg4 nut				
I	Φ2.6	三通 (T型) Tee	Φ1.0	Φ2.6		
J	Φ5.9×12.3	铝套 aluminum sleeve	Φ5.9	Φ8		
K	Φ3.5×1/4"	弯芯90° 带纳子 1/4" 90° bend core with 1/4" nut	Φ1.7	Φ3.5		
L	Φ3.5×Dg4	弯芯90° 带纳子Dg4 90° bend core with Dg4 nut	Φ1.7	Φ3.5		
M	Φ3.5	直芯 straight core	Φ1.7	Φ3.5		
N	Φ3.5	三通 (T型) Tee	Φ1.7	Φ3.5		
O	Φ8×18	铝皮套 Aluminium sleeve	Φ8	Φ11		
P	Φ6.3×3/8"	弯芯90° 带纳子 3/8" 90° bend core with 3/8" nut	Φ3.2	Φ6.3		
Q	Φ6.3	直芯 straight core	Φ3.2	Φ6.3		
R	3/8"	纳子 3/8" 3/8" nut				
S	Φ10.8×18	铝皮套 Aluminium sleeve	Φ10.8	Φ13.1		
T	1/4"	铜封环 copper seal ring				
U	3/8"	铜封环 copper seal ring				

蒸发压力控制

Evaporation pressure control

工程案例：多温库和变温库(+10°C ~ 0°C, -5°C ~ -15°C, -18°C ~ -25°C)

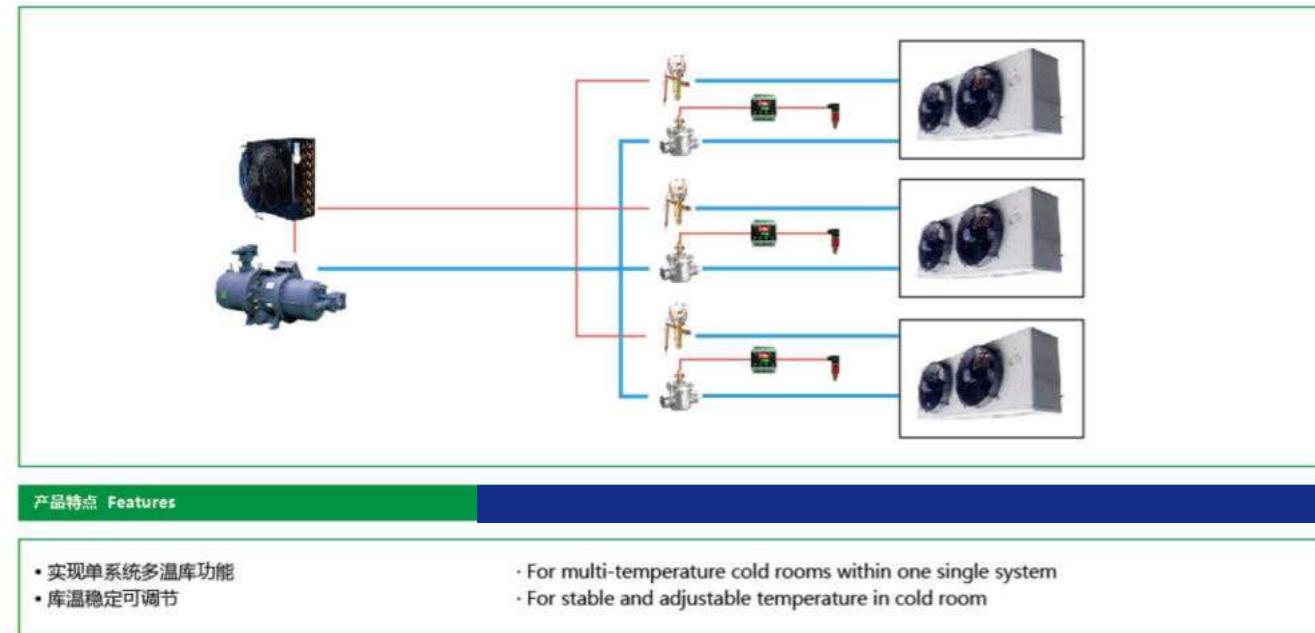


恒定温度控制（推荐）：油温控制精度±1°C

Constant temperature control: Oil temperature ±1°C




满液系统供液控制

Liquid supplement in barrel pump system

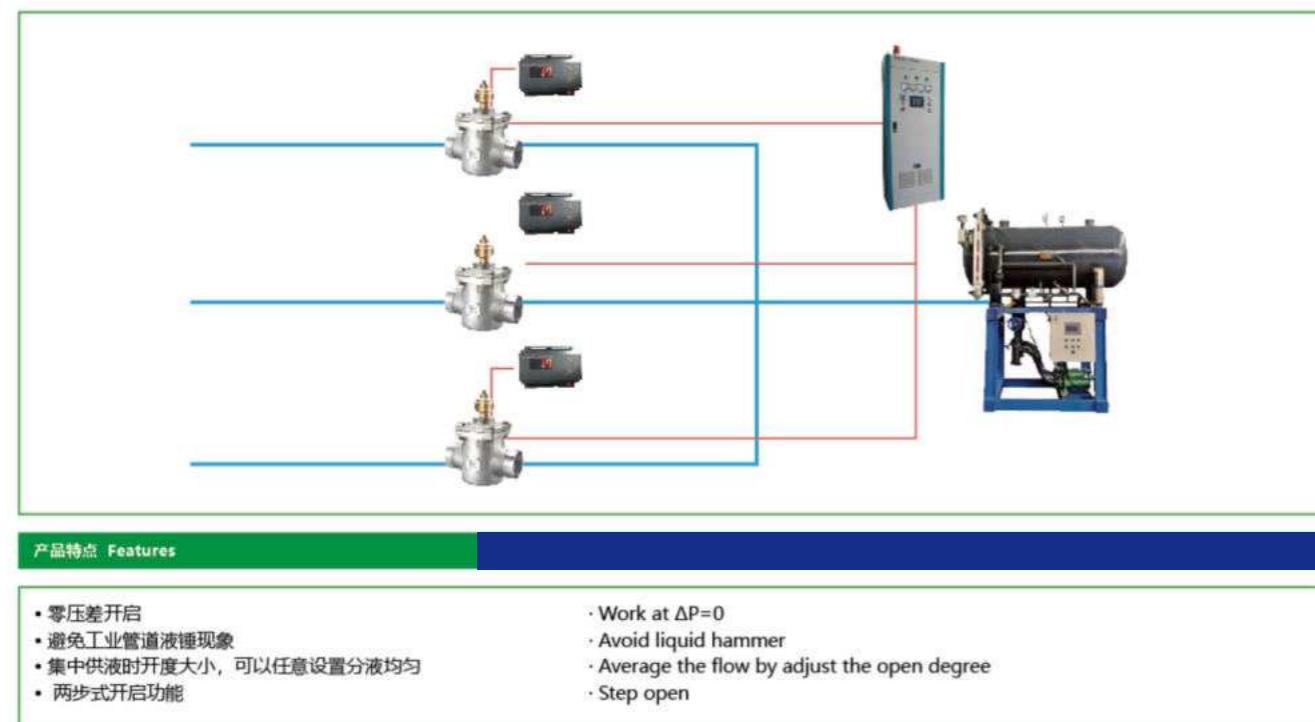


多路分组热氟融霜控制

3-way regulating valve applied for defrosting control

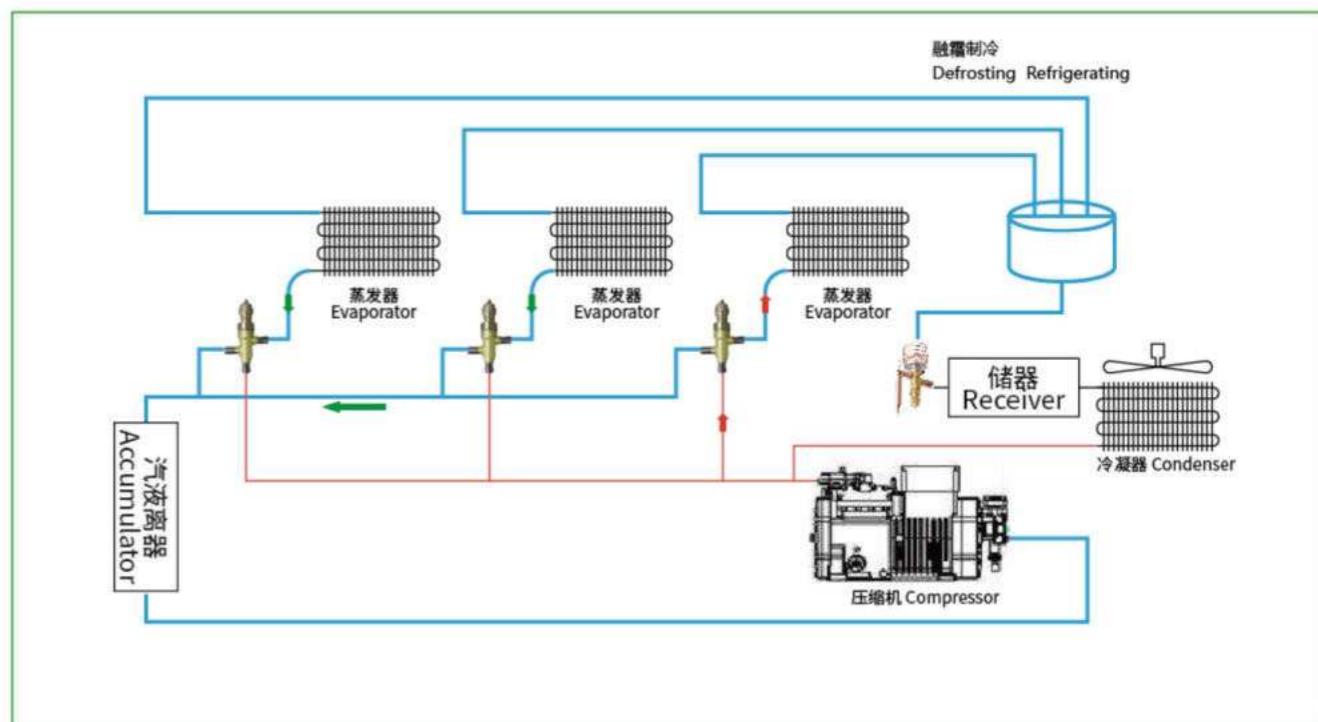

三通电动调节阀在热氟化霜中的应用

3-way regulating valve applied for defrosting control

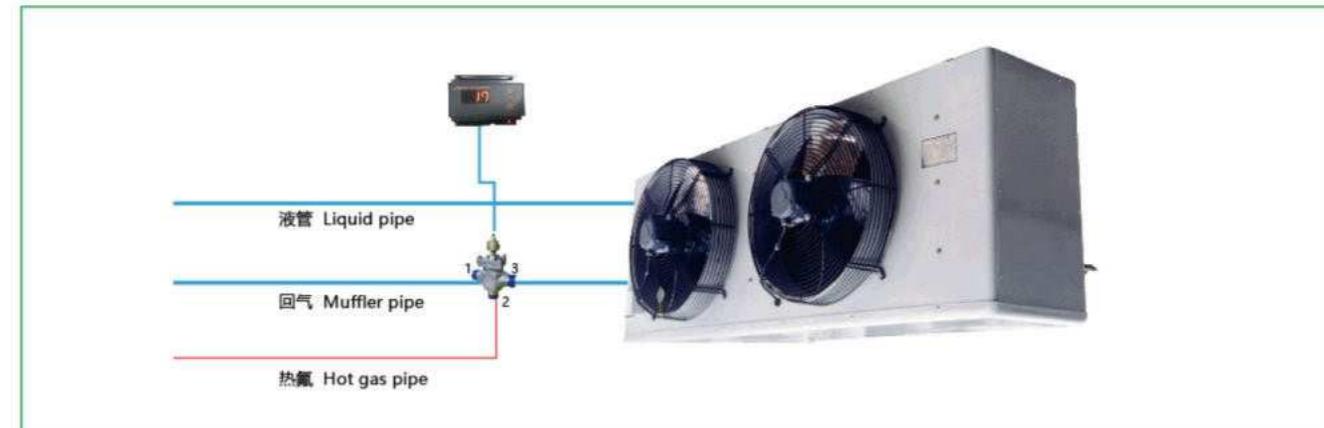

产品特点 Features

- 二步开启，避免液锤
- 三通，减少阀门，代替电磁阀和化霜阀
- 节能，可靠
- Two step open, avoid liquid hammer
- 3-way, reduce valves by replacing solenoid valve and defrosting valve
- Energy efficient and reliable

电动三通调节阀（热泵烘干控制）

3 way motorized regulating valve applied in heat pump dryer



产品特点 Features

- 干燥效率高
- 节能
- More efficient by shorten drying time
- Energy efficiency

制冷系统中的应用

Application in refrigeration system

